



HOSHIZAKI

2019 CATALOG & PRICE GUIDE



HOSHIZAKI. BEYOND STRONG.

EFFECTIVE: January 1, 2019 | REVISED: February 19, 2019

ICE EQUIPMENT

REFRIGERATION

| | | | |
|---|-------|---|-------|
| ICE MACHINE MODEL CODE & USAGE GUIDE | 3 | SUSHI CASES | 41 |
| TYPES OF ICE | 4 | STEELHEART FEATURES & BENEFITS | 42 |
| CUBER SERIES | 5 | REFRIGERATION MODEL CODE | 43 |
| Undercounter Cubers with Built-In Bins | 6-7 | STEELHEART SERIES | 45 |
| <i>KMEdge</i> Crescent Cubers | 8-14 | Upright Refrigerators & Freezers | 45-48 |
| <i>KMEdge</i> & KM Crescent Cubers (Dispenser) | 15 | Compact Undercounter Refrigerator | 49 |
| <i>KMEdge</i> Low Profile Crescent Cubers | 16 | Undercounter Refrigerators & Freezers | 50-52 |
| <i>KMEdge</i> Crescent Cubers - Serenity Series | 17-18 | Undercounter Refrigerators with Drawers | 53 |
| IM Square Cubers | 19 | Undercounter Freezers with Drawers | 54 |
| FLAKER / CUBELET SERIES | 20 | Worktop Refrigerators & Freezers | 55-56 |
| Undercounter Flakers with Built-In Bins | 20-21 | Worktop Refrigerators & Freezer with Drawers | 57-59 |
| Flakers | 21-22 | Prep Tables - Sandwich Top Refrigerators | 60-61 |
| Undercounter Cubelet Ice Machines | | Prep Tables - Sandwich Top Refrigerators with Drawers | 62 |
| with Built-In Bins | 23 | Prep Tables - Mega Top Refrigerators | 63-64 |
| Cubelet Ice Machines | 23-25 | Prep Tables - Mega Top Refrigerators with Drawers | 65-66 |
| Cubelets - Serenity Series | 26 | Prep Tables - Pizza Refrigerators | 67 |
| DISPENSER SERIES | 27 | Prep Tables - Pizza Refrigerators with Drawers | 68 |
| DCM Series | 27-28 | Drawer / Door Combinations | 69 |
| DCM Opti-Serve™ Series | 28-30 | Refrigerated Equipment Stands | 70 |
| DB Series | 30 | BACK BAR REFRIGERATION | 71-74 |
| DKM Series, DM Series | 31 | GLASS DOOR MERCHANDISERS | 75 |
| ICE STORAGE BINS | 32-33 | REFRIGERATION ACCESSORIES | 76 |
| DISPENSER STANDS | 34 | | |
| HCD ICE BAGGING SYSTEM | 34 | | |
| TOP KIT MATRIX | 35 | | |
| REMOTE CONDENSER SERIES | 36-38 | | |
| WATER FILTRATION | 39 | | |
| OZONE DEVICE | 40 | | |



HOSHIZAKI. BEYOND STRONG.

It's the promise of reliability... and the peace of mind that comes with it. It's performing beyond expectations...with relentless durability and sustainability. It's knowing that we've already thought about your future and can endure at the next level.



HEADQUARTERS FOR THE AMERICAS

HOSHIZAKI AMERICA, INC., with corporate headquarters in Peachtree City, Georgia, and a second manufacturing facility in Griffin, Georgia, operates some of the most automated production facilities in the industry. Using state-of-the-art technology, every HOSHIZAKI unit is run-tested at each factory, and undergoes rigorous quality performance tests. HOSHIZAKI offers advanced training seminars at our headquarters and basic training programs across the country for both service representatives and customers.



Peachtree City, GA



Griffin, GA

DID YOU KNOW?

- **HOSHIZAKI** is the world's largest manufacturer of commercial ice equipment, employing over 11,800 people.
- **HOSHIZAKI** is the world's largest manufacturer of commercial refrigerated food service equipment with sales of over \$2.5 billion serving customers in 60 nations.
- **HOSHIZAKI** operates plants worldwide including two in the USA, three in Japan, one each in England and China.
- In expansion to a full-service kitchen equipment company, **HOSHIZAKI** acquired Lancer Corporation in 2006, GRAM Commercial A/S in 2008, and both Jackson and Macom in 2013.
- **HOSHIZAKI** is certified in ISO-9001 and ISO-14001
- being the first and only food service equipment manufacturer to achieve ISO-14001.
- **HOSHIZAKI** was awarded "Partner Of The Year - Sustained Excellence" by Energy Star.



ISO 9001 • ISO 14001





WARRANTY

EFFECTIVE: January 1, 2019

Supersedes all previous price lists

TERMS and CONDITIONS

Prices are F.O.B. Factory. All prices and specifications are subject to change without notice. HOSHIZAKI reserves the right to determine point of shipment.

TERMS: Terms are such as the Company may extend to the purchaser.

LOST OR DAMAGED SHIPMENTS: Whenever seller shall deliver or cause to be delivered to a common carrier any goods ordered by consignee, whether the particular common carrier shall have been designated in the shipping instructions of the consignee or not, seller shall not be responsible for any delays or damage in shipment and the common carrier to which seller shall deliver goods shipped to the consignee is hereby declared to the agent of the consignee. Therefore it is the responsibility of the consignee to file claim with the carrier for lost or damaged shipments.

WARRANTY

All units to be free from manufacturing defects, covered by:

KM / KMEdge Series Cubers / IM Series Cubers / DKM Ice Machine & Dispenser and DB / DM Hotel / Motel Dispensers

3-Year - Parts & Labor on entire machine & DB / DM Dispenser

5-Year - Parts & Labor on Evaporator, Parts on Compressor, Air-Cooled Condenser Coil

AM-50 Series Cubers & C-80 Flakers

2-Year - Parts & Labor on entire machine

Flakers and Cubelet Ice Machines, DCM Ice & Water Dispensers

3-Year - Parts & Labor on entire machine.

5-Year - Parts on Compressor and Air-Cooled Condenser Coil

Bins & Water Dispensers

3-Year - Parts & Labor on Slope Front Bins

5-Year - Parts & Labor on Large Upright Bin Models

Countertop Refrigerated Display Cases

1-Year - Parts & Labor on entire machine

2-Year - Parts & Labor on Compressor, Evaporator, Air-Cooled Condenser

5-Year - Parts on Compressor, Air-Cooled Condenser

Accessories

90 Day - Parts only

1-Year - HS-5061 Drain Pump (Beckett Brand) - Parts & Labor

1-Year - Water Filter System & Replaceable Elements

Warranty

Warranty valid in United States, Canada, Puerto Rico, & U.S. Territories only. Contact Factory for warranty in other countries. Refer to manufacturer's full warranty for complete details. Suggested List Prices are intended only as a guide.

This does not restrict the price seller may establish due to market conditions.


AGENCY LISTINGS and MARKS



CANADIAN ENERGY PERFORMANCE VERIFIED
RENDEMENT ENERGETIQUE VERIFIE





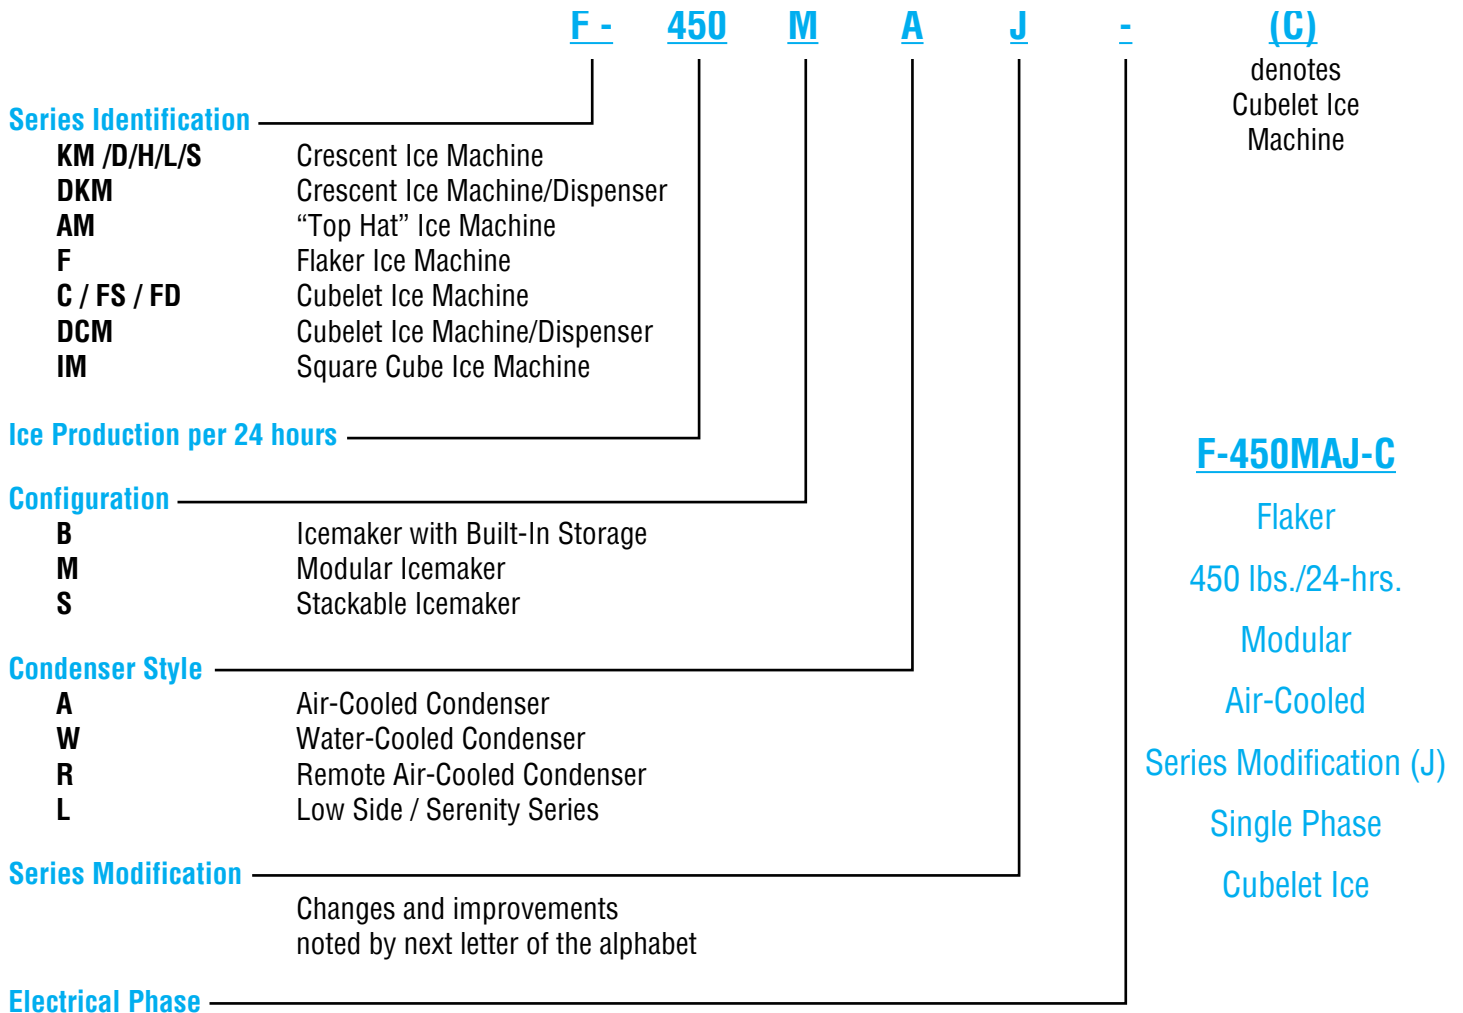


ICE MACHINE MODEL NUMBER IDENTIFICATION CODE



CHOOSING THE RIGHT ICE MAKER HOW MUCH ICE DO YOU NEED?

Before choosing an ice maker, take a look at how many customers you serve and what type of ice you will need

| | | | | |
|--|--|--|---|--|
|  Restaurants use an average of 2 lbs. of ice per customer per day |  Schools and university cafeterias average about 1.5 lbs. of ice per student per day |  Hospital cafeterias use about 1 lbs. of ice per person per day and an average of 10 lbs. for every bed |  Bars and cocktail lounges use about 3 lbs. of ice per seat |  Hotels use about 5 lbs. of ice per room per day. |
|--|--|--|---|--|

$$\frac{\text{Pounds of ice used} \times \text{Number of customers served}}{\text{The size of ice maker you need}} = \text{Your menu should dictate your machine—not the other way around}$$




TYPES OF ICE



Crescent Cube - Individual, hard, clear, crescent shape

Ice Equipment Models:


KM KMD
 KML KMS
 KMH DKM models

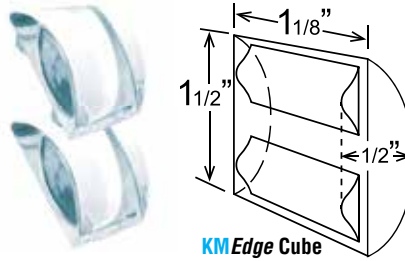

"Top Hat" Cube - Individual, hard, clear, round shape

Ice Equipment Models:


AM models

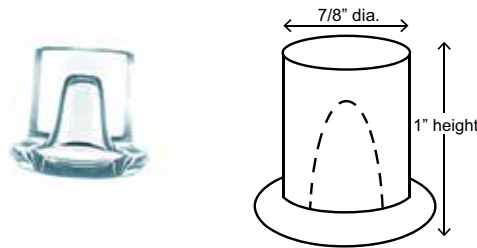

Square Cube - Individual, hard, clear, square shape

Ice Equipment Models:


IM models

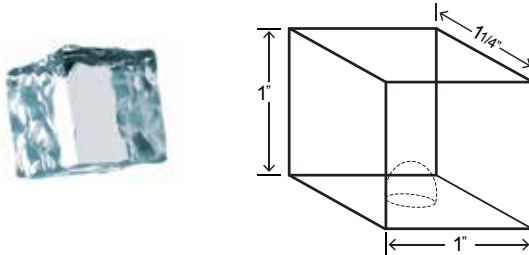

Cubelet - Chewable, soft, light, small pellet shape

Ice Equipment Models:


C
 FD-C
 F-C
 FS-C
 DCM models

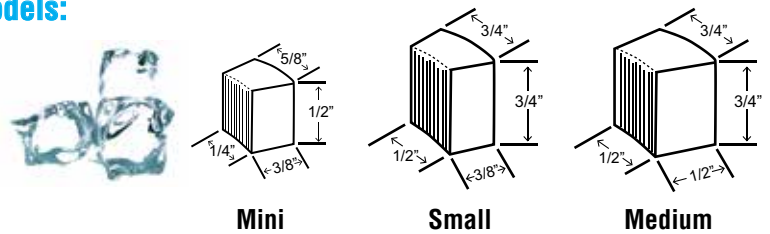

Flaked - Soft, light, chewable, various shapes

Ice Equipment Models:


F models

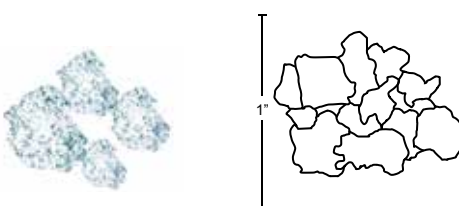



CUBER SERIES


Features & Benefits of the AM Cuber



- Attractive stainless steel finish
- Individual top-hat style cubers eliminates clumping and allow for easy filling of glass
- **AM Series Cubers** were designed with fewer moving parts, which contribute to its long life and dependability
- Compact size (less than 34 inches), undercounter design, swing style reversible door, and UL approval for outdoor use, expand the possibilities where this machine can be installed
- Front in and front out airflow allows unit to be built into cabinetry without additional ventilation
- Ice making compartment can be easily disassembled for cleaning
- Door system is designed to accommodate custom cabinetry
- ADA Compliant



Features & Benefits of the KM Cuber



KM|EDGE DESIGN

- Benefits include increased productivity and energy savings, even in harsh water conditions
- The **KMEdge Cuber Series** features an attractive stainless steel finish with the simplest ice making system in the industry
- The exclusive dual-sided stainless steel evaporator has oval-shaped copper refrigerant tubing for the most efficient heat exchange
- HOSHIZAKI's evaporator design freezes the purest water, washing most of the minerals and impurities down the drain; resulting in individual, crystal clear crescent cubers
- Not affected by caustic water, therefore no plating to peel or flake and no plastic to crack



- CycleSaver™ design allows production of the same amount of ice in half the cycles of other ice machines. Fewer moving parts and cycles means dependability, longer machine life and energy savings!



- EverCheck™ control board sounds an audible warning when service is needed







- Contains H-GUARD Plus® Antimicrobial Agent









CUBER Self Contained









| AM-50BAJ | | Undercounter AM Cubers with Built-In Bins | | | | | |
|--|------------|--|--------------------------------------|------------|------------------|---|---------------------|
|  | | Dimensions: 14 ⁷ / ₈ "W X 22 ⁵ / ₈ "D X 33 ¹ / ₂ "H | | | | Self-Contained Bin Storage Capacity Up to 22 Lbs. | |
| | | The ADA compliant machine dimensions are 14 ⁷ / ₈ "W x 22 ⁵ / ₈ "D x 31 ¹ / ₂ "H | | | | | |
| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
| AM-50BAJ | Air-Cooled | 35 | 51 | 115V/60/1 | 10.4 | 97 Lbs. | \$3,690 |
| AM-50BAJ-DS† | Air-Cooled | 35 | 51 | 115V/60/1 | 10.4 | 97 Lbs. | \$3,840 |
| AM-50BAJ-AD* | Air-Cooled | 34 | 55 | 115V/60/1 | 9.9 | 99 Lbs. | \$3,920 |
| AM-50BAJ-ADDS†* | Air-Cooled | 34 | 55 | 115V/60/1 | 9.9 | 99 Lbs. | \$4,020 |
| Accessories: HS-0229 DS Door Reversal Part (<i>Order as a Service Part</i>) HS-5061 Drain Pump (Beckett Brand) 1 Year Warranty - Parts & labor (<i>Order as Accessory</i>) \$620 HS-0182 Side Trim Kit \$242 HS-2133 2" Top Spacer Kit available \$175 H9320-51 Recommended Water Filtration - Single Configuration \$365 | | | | | | | |
|    | | | | | | | |
| UL approved for outdoor use †DS Models - Wood Door System (Designed to accommodate custom cabinetry) *ADA compliant | | | | | | | |



| KM-80BAJ | | Undercounter KMEdge Cuber with Built-In Bin | | | | | |
|---|------------|--|--------------------------------------|------------|------------------|--|---------------------|
|  | | Dimensions: 17 ³ / ₄ "W X 24"D X 39"H (6" Legs Included) | | | | Self-Contained Bin Storage Capacity Up to 38 Lbs.† | |
| | | The ADA compliant machine dimensions are 17 ³ / ₄ "W x 24"D x 39"H | | | | | |
| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
| KM-80BAJ* | Air-Cooled | 60 | 86 | 115V/60/1 | 7.95 | 123 Lbs. | \$3,290 |
| Accessories: HS-5061 Drain Pump (Beckett Brand) 1 Year Warranty - Parts & labor (<i>Order as Accessory</i>) \$620 H9320-51 Recommended Water Filtration - Single Configuration \$365 | | | | | | | |
|      | | | | | | | |
| †Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft ³ average density of ice. *ENERGY STAR qualified | | | | | | | |




| KM-115BAJ | | Undercounter KMEdge Cuber with Built-In Bin | | | | | |
|---|------------|--|--------------------------------------|------------|------------------|--|---------------------|
|  | | Dimensions: 23 ³ / ₄ "W X 24"D X 39"H (6" Legs Included) | | | | Self-Contained Bin Storage Capacity Up to 53 Lbs.† | |
| | | The ADA compliant machine dimensions are 23 ³ / ₄ "W x 24"D x 39"H | | | | | |
| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
| KM-115BAJ* | Air-Cooled | 102 | 116 | 115V/60/1 | 8.1 | 146 Lbs. | \$3,700 |
| Accessories: HS-5061 Drain Pump (Beckett Brand) 1 Year Warranty - Parts & labor (<i>Order as Accessory</i>) \$620 H9320-51 Recommended Water Filtration - Single Configuration \$365 | | | | | | | |
|      | | | | | | | |
| †Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft ³ average density of ice. *ENERGY STAR qualified | | | | | | | |



CUBER Self Contained

KM-160B_J







Undercounter *KMEdge* Cuber with Built-In Bin

Dimensions: 23 ³/₄"W X 28 ¹/₄"D X 39"H (6" Legs Included) **Self-Contained Bin Storage Capacity Up to 78 Lbs.†**


| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|------------------|--------------|--------------------------------------|--------------------------------------|------------|------------------|-----------------|---------------------|
| KM-160BAJ | Air-Cooled | 130 | 162 | 115V/60/1 | 8.3 | 159 Lbs. | \$4,140 |
| KM-160BWJ | Water-Cooled | 147 | 157 | 115V/60/1 | 6.2 | 163 Lbs. | \$4,140 |

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$365

†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.

KM-230BAJ







Undercounter *KMEdge* Cuber with Built-In Bin

Dimensions: 24"W X 28"D X 39"H (6" Legs Included) **Self-Contained Bin Storage Capacity Up to 80 Lbs.†**


| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|------------------|------------|--------------------------------------|--------------------------------------|------------|------------------|-----------------|---------------------|
| KM-230BAJ | Air-Cooled | 165 | 230 | 115V/60/1 | 7.78 | 165Lbs. | \$4,490 |

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$365

†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.

KM-300B_J







Undercounter *KMEdge* Cuber with Built-In Bin

Dimensions: 30"W X 28"D X 39"H (6" Legs Included) **Self-Contained Bin Storage Capacity Up to 100 Lbs.†**

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|------------------|--------------|--------------------------------------|--------------------------------------|------------|------------------|-----------------|---------------------|
| KM-300BAJ | Air-Cooled | 210 | 295 | 115V/60/1 | 7.02 | 187 Lbs. | \$5,150 |
| KM-300BWJ | Water-Cooled | 230 | 265 | 115V/60/1 | 4.90 | 187 Lbs. | \$5,150 |

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$365


†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.



CUBER



KM-350M_J



KMEdge X Series Cubers

Ice Machine Dimensions: 22"W X 27 ^{3/8}"D X 28"H

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|-------------------|--------------|--------------------------------------|--------------------------------------|------------|------------------|-----------------|---------------------|
| KM-350MAJ* | Air-Cooled | 393 | 489 | 115V/60/1 | 5.4 | 145 Lbs. | \$5,070 |
| KM-350MWJ | Water-Cooled | 383 | 414 | 115V/60/1 | 4.9 | 146 Lbs. | \$5,070 |

Accessories: **H9320-51** Recommended Water Filtration - Single Configuration \$365
HS-5426 Tamper Proof Kit - Air Cooled Units \$432
HS-5427 Tamper Proof Kit - Water Cooled Units \$432



B-300
22 x 32 1/2 x 74



B-500
30 x 32 1/2 x 74



B-700
44 x 32 1/2 x 74



B-800
48 x 32 1/2 x 74




B-900
52 x 32 1/2 x 74

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 35) for top kit options based on bin size.



KM-515MAH-E



KMEdge Cubers

Ice Machine Dimensions: 22"W X 27 ^{3/8}"D X 30 ^{5/16}"H

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|--------------------|------------|--------------------------------------|--------------------------------------|--------------|------------------|-----------------|---------------------|
| KM-515MAH-E | Air-Cooled | 185 | 233 | 220-240/50/1 | 7.1 | 79 Kg. | \$5,750 |

Accessories: **H9320-51** Recommended Water Filtration - Single Configuration \$365



"E" suffix designates 50 hertz models

*ENERGY STAR qualified



B-300
22 x 32 1/2 x 76 5/16



B-500
30 x 32 1/2 x 76 5/16



B-700
44 x 32 1/2 x 76 5/16



B-800
48 x 32 1/2 x 76 5/16



B900
52 x 32 1/2 x 76 5/16

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 35) for top kit options based on bin size.



CUBER

KM-520M_J

KMEdge X Series Cubers

Ice Machine Dimensions: 22"W X 27^{3/8}"D X 28"H

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|--------------------|--------------|--------------------------------------|--------------------------------------|------------|------------------|-----------------|---------------------|
| KM-520MAJ* | Air-Cooled | 480 | 556 | 115V/60/1 | 4.7 | 151 Lbs. | \$5,750 |
| KM-520MWJ | Water-Cooled | 444 | 474 | 115V/60/1 | 4.7 | 150 Lbs. | \$5,750 |
| KM-520MRJ*† | Remote A-C | 495 | 547 | 115V/60/1 | 4.8 | 142 Lbs. | \$5,650 |

Accessories: **H9320-52** Recommended Water Filtration - Twin Configuration \$625
HS-5426 Tamper Proof Kit - Air Cooled Units \$432
HS-5427 Tamper Proof Kit - Water Cooled Units \$432

22 x 32 1/2 x 74

30 x 32 1/2 x 74

44 x 32 1/2 x 74

48 x 32 1/2 x 74

52 x 32 1/2 x 74

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 35) for top kit options based on bin size.

KM-660M_J

KMEdge X Series Cubers

Ice Machine Dimensions: 22"W X 27^{3/8}"D X 28"H

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|-------------------|--------------|--------------------------------------|--------------------------------------|------------|------------------|-----------------|---------------------|
| KM-660MAJ | Air-Cooled | 562 | 630 | 115V/60/1 | 5.4 | 176 Lbs. | \$6,680 |
| KM-660MWJ | Water-Cooled | 668 | 669 | 115V/60/1 | 4.3 | 150 Lbs. | \$6,680 |
| KM-660MRJ† | Remote A-C | 602 | 646 | 115V/60/1 | 5.6 | 142 Lbs. | \$6,460 |

| Model Number | Condenser | Kgs. of Ice per 24 hours 32°A / 21°W | Kgs. of Ice per 24 hours 21°A / 10°W | Electrical | kWh per 45 Kgs. | Shipping Weight | List F.O.B. Griffin |
|--------------------|------------|--------------------------------------|--------------------------------------|--------------|-----------------|-----------------|---------------------|
| KM-660MAJ-E | Air-Cooled | 262 | 280 | 220-240/50/1 | 4.9 | 68 Kg. | \$6,680 |

Accessories: **H9320-52** Recommended Water Filtration - Twin Configuration \$625
HS-5426 Tamper Proof Kit - Air Cooled Units \$432
HS-5427 Tamper Proof Kit - Water Cooled Units \$432

†Use URC-5F Condenser for Remote Air-Cooled Unit

*ENERGY STAR qualified

"E" suffix designates 50 hertz models

22 x 32 1/2 x 74

30 x 32 1/2 x 74

44 x 32 1/2 x 74

48 x 32 1/2 x 74


52 x 32 1/2 x 74


Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 35) for top kit options based on bin size.



CUBER

KM-901M_J










KM Edge Cubers

Ice Machine Dimensions: 30"W X 27 ^{3/8}"D X 32 ^{1/2}"H

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|--------------------|--------------|--------------------------------------|--------------------------------------|---------------|------------------|-----------------|---------------------|
| KM-901MAJ | Air-Cooled | 753 | 905 | 208-230V/60/1 | 5.0 | 260 Lbs. | \$8,730 |
| KM-901MWJ | Water-Cooled | 870 | 950 | 208-230V/60/1 | 4.5 | 249 Lbs. | \$8,730 |
| KM-901MRJ* | Remote A-C | 853 | 904 | 208-230V/60/1 | 4.5 | 250 Lbs. | \$8,630 |
| KM-901MRJ3* | Remote A-C | 830 | 927 | 208-230/60/3 | 5.4 | 258 Lbs. | \$8,730 |

Accessories: **H9320-52** Recommended Water Filtration - Twin Configuration \$625
HS-5245 Tamper Proof Kit - Air Cooled Units \$485
HS-5246 Tamper Proof Kit - Water Cooled Units \$485





30 x 32 1/2 x 78 1/2 44 x 32 1/2 x 78 1/2 48 x 32 1/2 x 78 1/2 52 x 32 1/2 x 78 1/2

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 35) for top kit options based on bin size.

*Use URC-14F Condenser for Remote Air-Cooled Unit

KM-1100M_J








KM Edge Cubers


Ice Machine Dimensions: 30"W X 27 ^{3/8}"D X 32 ^{1/2}"H

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|-------------------|--------------|--------------------------------------|--------------------------------------|---------------|------------------|-----------------|---------------------|
| KM-1100MAJ | Air-Cooled | 935 | 1087 | 208-230V/60/1 | 4.9 | 290 Lbs. | \$10,100 |
| KM-1100MWJ | Water-Cooled | 1006 | 1073 | 208-230V/60/1 | 4.0 | 280 Lbs. | \$10,100 |
| KM-1100MRJ | Remote A-C | 1030 | 1156 | 208-230V/60/1 | 4.5 | 272 Lbs. | \$10,000 |

| Model Number | Condenser | Kgs. of Ice per 24 hours 32°A / 21°W | Kgs. of Ice per 24 hours 21°A / 10°W | Electrical | kWh per 45 Kgs. | Shipping Weight | List F.O.B. Griffin |
|---------------------|------------|--------------------------------------|--------------------------------------|---------------|-----------------|-----------------|---------------------|
| KM-1100MAJ50 | Air-Cooled | 356 | 464 | 220-240V/50/1 | 5.7 | 136 Kg. | \$10,100 |

Accessories: **H9320-52** Recommended Water Filtration - Twin Configuration \$625
HS-5245 Tamper Proof Kit - Air Cooled Units \$485
HS-5246 Tamper Proof Kit - Water Cooled Units \$485



30 x 32 1/2 x 78 1/2 44 x 32 1/2 x 78 1/2 48 x 32 1/2 x 78 1/2 52 x 32 1/2 x 78 1/2

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 35) for top kit options based on bin size.

*Use URC-14F Condenser for Remote Air-Cooled Unit

"50" suffix designates 50 hertz models



CUBER

KM-1301S_J

KMEdge Cubers

Ice Machine Dimensions: 48"W X 27 3/8"D X 27 3/8"H

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|---------------------|--------------|--------------------------------------|--------------------------------------|---------------|------------------|-----------------|---------------------|
| KM-1301SAJ | Air-Cooled | 1301 | 1365 | 208-230V/60/1 | 4.27 | 338 Lbs. | \$11,160 |
| KM-1301SWJ | Water-Cooled | 1230 | 1247 | 208-230V/60/1 | 3.76 | 335 Lbs. | \$11,160 |
| KM-1301SRJ | Remote A-C | 1260 | 1400 | 208-230V/60/1 | 4.28 | 339 Lbs. | \$11,040 |
| KM-1301SAJ3* | Air-Cooled | 1350 | 1427 | 208-230V/60/3 | 3.95 | 338 Lbs. | \$11,270 |
| KM-1301SWJ3 | Water-Cooled | 1355 | 1360 | 208-230V/60/3 | 3.25 | 335 Lbs. | \$11,270 |
| KM-1301SRJ3* | Remote A-C | 1330 | 1433 | 208-230V/60/3 | 3.83 | 339 Lbs. | \$11,160 |

| Model Number | Condenser | Kgs. of Ice per 24 hours 32°A / 21°W | Kgs. of Ice per 24 hours 21°A / 10°W | Electrical | kWh per 45 Kgs. | Shipping Weight | List F.O.B. Griffin |
|---------------------|------------|--------------------------------------|--------------------------------------|---------------|-----------------|-----------------|---------------------|
| KM-1301SAJ-E | Remote A-C | 501 | 624 | 220-240/50/1* | 4.5 | 154 Kgs. | \$11,740 |

Accessories: **H9320-53** Recommended Water Filtration - Triple Configuration \$870
HS-5252 Tamper Proof Kit - Air Cooled Units \$535
HS-5253 Tamper Proof Kit - Water Cooled Units \$535

Use URC-14F Condenser for Remote Air-Cooled Unit
 "E" suffix designates 50 hertz models
 *ENERGY STAR qualified

48 x 32 1/2 x 73 3/8 48 x 32 1/2 x 101 3/4 52 x 32 1/2 x 73 3/8 52 x 32 1/2 x 101 3/4

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 35) for top kit options based on bin size.

KM-1340M_J

KMEdge Cubers

Ice Machine Dimensions: 30"W X 27 3/8"D X 41 1/2"H

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|---------------------|--------------|--------------------------------------|--------------------------------------|-----------------|------------------|-----------------|---------------------|
| KM-1340MAJ | Air-Cooled | 1089 | 1275 | 208-230V/60/1** | 4.81 | 315 Lbs. | \$11,490 |
| KM-1340MWJ | Water-Cooled | 1280 | 1323 | 208-230V/60/1** | 3.6 | 315 Lbs. | \$11,490 |
| KM-1340MRJ | Remote A-C | 1177 | 1371 | 208-230V/60/1** | 4.54 | 289 Lbs. | \$11,390 |
| KM-1340MRJ3* | Remote A-C | 1266 | 1428 | 208-230V/60/3* | 4.16 | 289 Lbs. | \$11,490 |

Accessories: ****HS-5030** Transformer Kit - 4 wire to 3 wire (eliminates need for dedicated neutral) \$165
H9320-52 Recommended Water Filtration - Twin Configuration \$625

Use URC-14F Condenser for Remote Air-Cooled Unit
 *ENERGY STAR qualified


30 x 32 1/2 x 87 1/2 44 x 32 1/2 x 87 1/2 48 x 32 1/2 x 87 1/2 52 x 32 1/2 x 87 1/2

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 35) for top kit options based on bin size.




CUBER

KM-1601MRJ






KMEdge Cubers

Ice Machine Dimensions: 30"W X 27 ³/₈"D X 41 ⁵/₈"H







| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|--------------------|------------|--------------------------------------|--------------------------------------|-----------------|------------------|-----------------|---------------------|
| KM-1601MRJ | Remote A-C | 1550 | 1594 | 208-230V/60/1** | 4.35 | 316 Lbs. | \$13,550 |
| KM-1601MRJ3 | Remote A-C | 1550 | 1653 | 208-230V/60/3 | 4.09 | 316 Lbs. | \$13,660 |

Accessories: ****HS-5030** Transformer Kit - 4 wire to 3 wire (eliminates need for dedicated neutral) \$165
H9320-52 Recommended Water Filtration - Twin Configuration \$625


Use URC-22F Condenser for Remote Air-Cooled Unit

30 x 32 1/2 x 87 1/2 44 x 32 1/2 x 87 1/2 48 x 32 1/2 x 87 1/2 52 x 32 1/2 x 87 1/2


Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 35) for top kit options based on bin size.

KM-1601S_J







KMEdge Cubers

Ice Machine Dimensions: 48"W X 27 ³/₈"D X 27 ³/₈"H







| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|--------------------|--------------|--------------------------------------|--------------------------------------|-----------------|------------------|-----------------|---------------------|
| KM-1601SAJ | Air-Cooled | 1433 | 1513 | 208-230V/60/1** | 4.24 | 315 Lbs. | \$13,270 |
| KM-1601SWJ | Water-Cooled | 1650 | 1660 | 208-230V/60/1** | 3.30 | 360 Lbs. | \$13,270 |
| KM-1601SRJ* | Remote A-C | 1600 | 1640 | 208-230V/60/1** | 3.96 | 350 Lbs. | \$13,160 |
| KM-1601SAJ3 | Air-Cooled | 1414 | 1513 | 208-230V/60/3 | 4.40 | 315 Lbs. | \$13,370 |
| KM-1601SWJ3 | Water-Cooled | 1660 | 1671 | 208-230V/60/3 | 3.32 | 360 Lbs. | \$13,500 |
| KM-1601SRJ3 | Remote A-C | 1600 | 1635 | 208-230V/60/3 | 4.14 | 350 Lbs. | \$13,370 |

Accessories: ****HS-5030** Transformer Kit - 4 wire to 3 wire (eliminates need for dedicated neutral) \$165
H9320-52 Recommended Water Filtration - Twin Configuration \$625
HS-5252 Tamper Proof Kit - Air Cooled Units \$535
HS-5253 Tamper Proof Kit - Water Cooled Units \$535

Use URC-22F Condenser for Remote Air-Cooled Unit

*ENERGY STAR qualified

48 x 32 1/2 x 73 3/8 48 x 32 1/2 x 101 3/4 52 x 32 1/2 x 73 3/8 52 x 32 1/2 x 101 3/4

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 35) for top kit options based on bin size.



CUBER

KM-1900S_J

KMEdge Cubers

Ice Machine Dimensions: 48"W X 27^{3/8}"D X 36^{7/16}"H

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|---------------------|--------------|--------------------------------------|--------------------------------------|-----------------|------------------|-----------------|---------------------|
| KM-1900SAJ* | Air-Cooled | 1675 | 1875 | 208-230V/60/1** | 3.9 | 415 Lbs. | \$14,160 |
| KM-1900SWJ | Water-Cooled | 1875 | 1880 | 208-230V/60/1** | 3.2 | 415 Lbs. | \$14,160 |
| KM-1900SRJ* | Remote A-C | 1700 | 1933 | 208-230V/60/1** | 3.9 | 415 Lbs. | \$14,040 |
| KM-1900SAJ3* | Air-Cooled | 1675 | 1865 | 208-230V/60/3 | 3.9 | 415 Lbs. | \$14,330 |
| KM-1900SWJ3 | Water-Cooled | 1875 | 1880 | 208-230V/60/3 | 3.2 | 415 Lbs. | \$14,330 |
| KM-1900SRJ3* | Remote A-C | 1700 | 1933 | 208-230V/60/3 | 3.9 | 415 Lbs. | \$14,270 |

Accessories: ****HS-5030** Transformer Kit - 4 wire to 3 wire (eliminates need for dedicated neutral) \$165
H9320-52 Recommended Water Filtration - Twin Configuration \$625
HS-5254 Tamper Proof Kit - Air Cooled Units \$600
HS-5255 Tamper Proof Kit - Water Cooled Units \$600

Use URC-22F Condenser for Remote Air-Cooled Unit
***ENERGY STAR qualified**

48 x 32 1/2 x 82 7/16 48 x 32 1/2 x 119 7/8 52 x 32 1/2 x 82 7/16 52 x 32 1/2 x 119 7/8

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 35) for top kit options based on bin size.

KM-2200S_J3

KMEdge Cubers

Ice Machine Dimensions: 48"W X 27^{3/8}"D X 36^{7/16}"H

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|---------------------|--------------|--------------------------------------|--------------------------------------|---------------|------------------|-----------------|---------------------|
| KM-2200SWJ3 | Water-Cooled | 2200 | 2221 | 208-230V/60/3 | 3.11 | 440 Lbs. | \$17,820 |
| KM-2200SRJ3* | Remote A-C | 2075 | 2206 | 208-230V/60/3 | 3.75 | 440 Lbs. | \$17,720 |

Accessories: **H9320-52** Recommended Water Filtration - Twin Configuration \$625
HS-5255 Tamper Proof Kit - Water Cooled Units \$600

Use URC-22F Condenser for Remote Air-Cooled Unit
***ENERGY STAR qualified**


48 x 32 1/2 x 82 7/16 48 x 32 1/2 x 119 7/8 52 x 32 1/2 x 82 7/16 52 x 32 1/2 x 119 7/8


Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 35) for top kit options based on bin size.



CUBER

KM-2600S_J3









KM Edge Cubers





Ice Machine Dimensions: 48"W X 27^{3/8}"D X 36^{7/16}"H

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|---------------------|--------------|--------------------------------------|--------------------------------------|---------------|------------------|-----------------|---------------------|
| KM-2600SWJ3 | Water-Cooled | 2480 | 2482 | 208-230V/60/3 | 3.6 | 440 Lbs. | \$19,510 |
| KM-2600SRJ3* | Remote A-C | 2580 | 2617 | 208-230V/60/3 | 3.61 | 440 Lbs. | \$18,730 |

Accessories: **H9320-53** Recommended Water Filtration - Triple Configuration \$870
HS-5255 Tamper Proof Kit - Water Cooled Units \$600


Use URC-26J Condenser for Remote Air-Cooled Unit
 *ENERGY STAR qualified







48 x 32 1/2 x 82 7/16 48 x 32 1/2 x 119 7/8 52 x 32 1/2 x 82 7/16 52 x 32 1/2 x 119 7/8

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 35) for top kit options based on bin size.

KMH-2000S_H









KM Cubers

Ice Machine Dimensions: 36"W X 40"D X 36^{7/16}"H


| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|----------------------|--------------|--------------------------------------|--------------------------------------|-----------------|------------------|-----------------|---------------------|
| KMH-2000SWH3 | Water-Cooled | 1840 | 1843 | 208-230V/60/3 | 3.19 | 415 Lbs. | \$16,650 |
| KMH-2000SRH* | Remote A-C | 1694 | 1944 | 208-230V/60/1** | 3.80 | 415 Lbs. | \$16,430 |
| KMH-2100SRJ3* | Remote A-C | 1925 | 2026 | 208-230V/60/3 | 3.67 | 415 Lbs. | \$16,550 |


Accessories: ****HS-5030** Transformer Kit - 4 wire to 3 wire (eliminates need for dedicated neutral) \$165
H9320-52 Recommended Water Filtration - Twin Configuration \$625

Use URC-22F Condenser for Remote Air-Cooled Unit
 *ENERGY STAR qualified

KMD-410M_H










KM Cubers

Ice Machine Dimensions: 22"W X 24"D X 24"H

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|-------------------|--------------|--------------------------------------|--------------------------------------|---------------|------------------|-----------------|---------------------|
| KMD-410MAH | Air-Cooled | 324 | 415 | 115-120V/60/1 | 5.8 | 161 Lbs. | \$5,390 |
| KMD-410MWH | Water-Cooled | 382 | 440 | 115-120V/60/1 | 4.3 | 163 Lbs. | \$5,390 |

Accessories: **H9320-51** Recommended Water Filtration - Single Configuration \$365

22 x 30 1/2 x 35 3/8 22 x 32 1/2 x 68 1/8

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 35) for top kit options based on bin size.



CUBER Dispenser

KMD-460M_J

KM Cubers

Ice Machine Dimensions: 30"W X 24 1/4"D X 22 1/8"H

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|-------------------|--------------|--------------------------------------|--------------------------------------|---------------|------------------|-----------------|---------------------|
| KMD-460MAJ | Air-Cooled | 400 | 489 | 115-120V/60/1 | 5.5 | 170 Lbs. | \$5,750 |
| KMD-460MWJ | Water-Cooled | 472 | 487 | 115-120V/60/1 | 4.1 | 170 Lbs. | \$5,750 |

Accessories: **H9320-51** Recommended Water Filtration - Single Configuration \$365

22 x 30 1/2 x 34

30 x 32 1/2 x 68 1/8

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 35) for top kit options based on bin size.

KMD-530M_H

KM Edge Cubers

Ice Machine Dimensions: 30"W X 24 1/4"D X 22 1/8"H

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|-------------------|--------------|--------------------------------------|--------------------------------------|---------------|------------------|-----------------|---------------------|
| KMD-530MAH | Air-Cooled | 462 | 553 | 115-120V/60/1 | 5.7 | 170 Lbs. | \$5,970 |
| KMD-530MWH | Water-Cooled | 520 | 540 | 115-120V/60/1 | 4.4 | 170 Lbs. | \$5,970 |
| KMD-530MRH | Remote A-C | 488 | 560 | 115-120V/60/1 | 5.8 | 170 Lbs. | \$5,860 |

Accessories: **H9320-51** Recommended Water Filtration - Single Configuration \$365

22 x 30 1/2 x 34

30 x 32 1/2 x 68 1/8

Use URC-5F Condenser for Remote Air-Cooled Unit
Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 35) for top kit options based on bin size.

KMD-860M_J

KM Edge Cubers

Ice Machine Dimensions: 30"W X 24 5/8"D X 28"H

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|-------------------|--------------|--------------------------------------|--------------------------------------|---------------|------------------|-----------------|---------------------|
| KMD-860MAJ | Air-Cooled | 665 | 855 | 208-230V/60/1 | 5.16 | 248 Lbs. | \$8,300 |
| KMD-860MWJ | Water-Cooled | 862 | 940 | 208-230V/60/1 | 3.90 | 258 Lbs. | \$8,300 |
| KMD-860MRJ | Remote A-C | 850 | 967 | 208-230V/60/1 | 5.05 | 256 Lbs. | \$8,190 |

Accessories: **H9320-52** Recommended Water Filtration - Twin Configuration \$625

30 x 30 1/2 x 39 5/8

30 x 32 1/2 x 68 1/8


48 x 32 1/2 x 74

Use URC-9F Condenser for Remote Air-Cooled Unit
Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 35) for top kit options based on bin size.



CUBER Low Profile

KML-325M_J



Low Profile *KMEdge* Cubers

Ice Machine Dimensions: 30"W X 27 ^{3/8}"D X 22"H

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|-------------------|--------------|--------------------------------------|--------------------------------------|------------|------------------|-----------------|---------------------|
| KML-325MAJ | Air-Cooled | 300 | 380 | 115V/60/1 | 5.72 | 185 Lbs. | \$4,790 |
| KML-325MWJ | Water-Cooled | 355 | 385 | 115V/60/1 | 4.51 | 185 Lbs. | \$4,790 |

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$365



30 x 32 1/2 x 55 3/8




30 x 32 1/2 x 68



30 x 30 x 75

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 35) for top kit options based on bin size.

KML-500M_J




Low Profile *KMEdge* Cubers

Ice Machine Dimensions: 30"W X 27 ^{3/8}"D X 22"H

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|-------------------|--------------|--------------------------------------|--------------------------------------|------------|------------------|-----------------|---------------------|
| KML-500MAJ | Air-Cooled | 400 | 442 | 115V/60/1 | 5.55 | 185 Lbs. | \$5,460 |
| KML-500MWJ | Water-Cooled | 515 | 543 | 115V/60/1 | 4.33 | 185 Lbs. | \$5,460 |

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$365



30 x 32 1/2 x 55 3/8




30 x 32 1/2 x 68



30 x 30 x 75

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 35) for top kit options based on bin size.

KML-700M_J



Low Profile *KMEdge* Cubers

Ice Machine Dimensions: 30"W X 27 ^{3/8}"D X 26"H

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|--------------------|--------------|--------------------------------------|--------------------------------------|------------|------------------|-----------------|---------------------|
| KML-700MAJ* | Air-Cooled | 572 | 658 | 115V/60/1 | 5.16 | 220 Lbs. | \$6,700 |
| KML-700MWJ* | Water-Cooled | 730 | 756 | 115V/60/1 | 3.61 | 220 Lbs. | \$6,700 |
| KML-700MRJ* | Remote A-C | 643 | 742 | 115V/60/1 | 4.70 | 220 Lbs. | \$6,600 |

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$365



Use URC-9F Condenser for Remote Air-Cooled Unit

*ENERGY STAR qualified



30 x 32 1/2 x 59 3/8



30 x 32 1/2 x 72



30 x 30 x 79

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 35) for top kit options based on bin size.



CUBER Serenity

KMS-822MLJ

KMEdge Cuber

Ice Machine Dimensions: 22"W X 24^{5/8}"D X 28"H

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|---|------------|--------------------------------------|--------------------------------------|------------|------------------|-----------------|---------------------|
| KMS-822MLJ <small>using 1 Phase Remote Condenser†</small> | Remote A-C | 770 | 851 | 115V/60/1* | 5.3 | 150 Lbs. | \$7,590 |

Accessories: **HS-5062** Extension bracket for freestyle application \$142
H9320-52 Recommended Water Filtration - Twin Configuration \$625

IBD 4500 22"
22 x 30 1/2 x 35 3/8

Designed for use on Beverage Dispensers
 †Use SRK-10J Condenser for Remote Air-Cooled Unit (sold separately)
 *115V supply for the KMS Ice maker is supplied from the SRK remote condenser

See TOP KIT MATRIX (pg 35) for top kit options based on bin size.

KMS-830MLH

KM Cuber

Ice Machine Dimensions: 30"W X 16^{1/2}"D X 29"H

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|---|------------|--------------------------------------|--------------------------------------|------------|------------------|-----------------|---------------------|
| KMS-830MLH <small>using 1 Phase Remote Condenser†</small> | Remote A-C | 700 | 820 | 115V/60/1* | 5.50 | 137 Lbs. | \$8,000 |

Accessories: **H9320-51** Recommended Water Filtration - Single Configuration \$365

Lancer FS30
30 x 30 1/2 x 39 5/8

Designed for use on Beverage Dispensers
 †Use SRK-8H Condenser for Remote Air-Cooled Unit (sold separately)
 *115V supply for the KMS Ice maker is supplied from the SRK remote condenser

KMS-1122MLJ

KMEdge Cuber

Ice Machine Dimensions: 22"W X 18^{1/8}"D X 31^{1/4}"H

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|--|------------|--------------------------------------|--------------------------------------|------------|------------------|-----------------|---------------------|
| KMS-1122MLJ <small>using 1 Phase Remote Condenser†</small> | Remote A-C | 1075 | 1151 | 115V/60/1* | 4.2 | 152 Lbs. | \$8,530 |
| KMS-1122MLJ <small>using 3 Phase Remote Condenser†</small> | Remote A-C | 1100 | 1151 | 115V/60/3* | 4.05 | 152 Lbs. | \$8,530 |

Accessories: **H9320-52** Recommended Water Filtration - Twin Configuration \$625


Lancer FS22
22 x 30 1/2 x 40 1/4


Designed for use on Beverage Dispensers
 †Use SRK-12J or SRK-12J3 Condenser for Remote Air-Cooled Unit (sold separately)
 *115V supply for the KMS Ice maker is supplied from the SRK remote condenser



CUBER Serenity

KMS-1402MLJ









KMEdge Cuber

Ice Machine Dimensions: 30"W X 24"D X 28"H

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|--|------------|--------------------------------------|--------------------------------------|------------|------------------|-----------------|---------------------|
| KMS-1402MLJ <small>using 1 Phase Remote Condenser†</small> | Remote A-C | 1400 | 1501 | 115V/60/1* | 4.3 | 178 Lbs. | \$8,550 |
| KMS-1402MLJ <small>using 3 Phase Remote Condenser†</small> | Remote A-C | 1325 | 1325 | 115V/60/3* | 4.55 | 178 Lbs. | \$8,550 |

Accessories: H9320-52 Recommended Water Filtration - Twin Configuration \$625





Lancer FS30
30 x 30 1/2 x 39 5/8

†Use SRK-15J or SRK-15J3 Condenser for Remote Air-Cooled Unit (sold separately)
*115V supply for the KMS Ice maker is supplied from the SRK remote condenser

See TOP KIT MATRIX (pg 35) for top kit options based on bin size.

KMS-2000MLJ









KMEdge Cuber

Ice Machine Dimensions: 30"W X 24"D X 32^{7/8}"H

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|--|------------|--------------------------------------|--------------------------------------|----------------|------------------|-----------------|---------------------|
| KMS-2000MLJ <small>using 1 Phase Remote Condenser†</small> | Remote A-C | 1850 | 1926 | 208-230V/60/1* | 4.50 | 206 Lbs. | \$10,580 |
| KMS-2000MLJ <small>using 3 Phase Remote Condenser†</small> | Remote A-C | 1900 | 1938 | 208-230V/60/3* | 4.30 | 206 Lbs. | \$10,580 |

Accessories: H9320-53 Recommended Water Filtration - Triple Configuration \$870



Lancer FS30
30 x 30 1/2 x 39 5/8

†Use SRK-20J or SRK-20J3 Condenser for Remote Air-Cooled Unit (sold separately)
*208-230V supply for the KMS Ice maker is supplied from the SRK remote condenser

See TOP KIT MATRIX (pg 35) for top kit options based on bin size.










CUBER









Features & Benefits of the IM Square Cuber



- **HOSHIZAKI IM Square Cubers** utilize an ice making system that has an automatic rinse cycle, which means each ice cycle is made with fresh water protecting the integrity and flavor of the drink.
- A closed water circuit offers the ultimate contamination protection, by reducing the number of points at which impurities can enter the ice making process.
- A stainless steel exterior with integrated door handles provides a hygienic and high quality finish (Self contained unit only)
- Removable door gaskets prevent any heat and contamination from entering the bin making the product easy to clean and maintain. (Self contained unit only)
- Easily cleanable air filter extends the life of the ice machine
- **HOSHIZAKI IM Square Cubers** are electronically controlled for consistent quality of ice
- Natural foaming agent insulates the bin and preserves the quality and consistency of the ice produced longer than any other machine available - saving energy and money



| | | | | | | | |
|---|---|--|---|-------------------|-------------------------|------------------------|----------------------------|
|  |  | IM Square Cuber with Built-In Bin | | | | | |
| | | Dimensions: 39 1/2"W X 23 5/8"D X 33 1/2"H (including 6" legs) | | | | | |
| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
| IM-200BAB | Air-Cooled | 155 | 186 | 115V/60/1 | 8.2 | 198 lbs. | \$6,180 |
| Accessories: H9320-51 Recommended Water Filtration - Single Configuration | | | | | | | \$365 |
|     | | | | | | | |
| †Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft ³ average density of ice. | | | | | | | |

| | | | | | | | |
|---|---|--|---|-------------------|-------------------------|------------------------|----------------------------|
|  |  | IM Square Cuber | | | | | |
| | | Ice Machine Dimensions: 44"W X 27 5/8"D X 21 3/4"H | | | | | |
| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
| IM-500SAA* | Air-Cooled | 435 | 500 | 115V/60/1 | 5.45 | 220 Lbs. | \$7,730 |
| Accessories: S-25691 Stacking Kit (Order as Accessory) | | | | | | | \$525 |
| H9320-51 Recommended Water Filtration - Single Configuration | | | | | | | \$365 |
|    | | | | | | | |
|   | | | | | | | |
|  | | | | | | | |
| <small>44 x 32 1/2 x 67 3/4 44 x 32 1/2 x 89 1/2 48 x 32 1/2 x 67 3/4 48 x 32 1/2 x 89 1/2 52x 32 1/2 x 67 3/4 52 x 32 1/2 x 89 1/2</small> | | | | | | | |
| <small>*ENERGY STAR qualified Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 35) for top kit options based on bin size.</small> | | | | | | | |




FLAKER Self Contained

Features & Benefits of the Flaker / Cubelet Series




- Attractive stainless steel exterior
- Most models are available in both flaked and cubelet (nugget-style) ice
- The internal auger design produces the highest quality ice with fewer repairs and less down time
- The freezing cylinder is made from cast stainless steel
- The industry's only greaseless bearing design improves life of the machine
- **HOSHIZAKI Flaker and Cubelet** ice machines have electric water inlet valves and an automatic purge of water from the reservoir for cleaner operation and longer bearing life
- Advanced CleanCycle24™ design - 2 second rinse every hour
- Infrared bin control is standard and factory installed



FLAKED ICE USAGE GUIDE

| Establishment | Approximate Daily Usage |
|---------------------------|-------------------------|
| Restaurant | 1.5 lbs. ice per seat |
| Salad Bar/Seafood Display | 30 lbs. ice per ft3 |
| Hospital | |
| Patient Care | 10 lbs. ice per bed |
| Cafeteria | 1 lb. ice per seat |
| Nursing Home | 6 lbs. per bed |

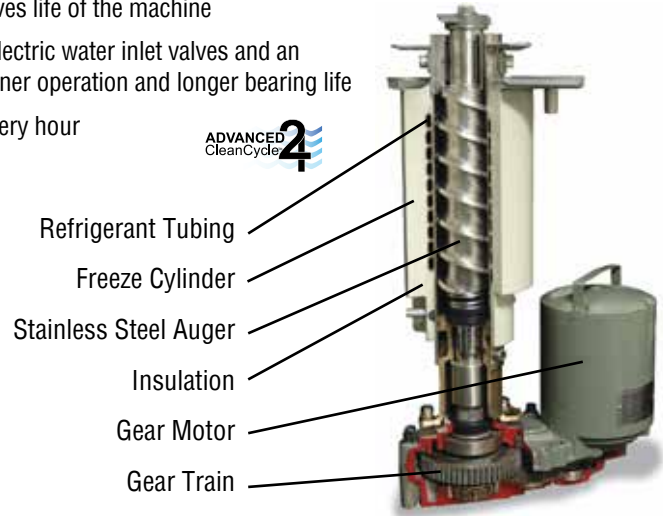

| F-300BAJ | | Undercounter FLAKER with Built-In Bin | | | | | | |
|--|---------------------|---|---|---|-------------------|-------------------------|--|----------------------------|
| | | Dimensions: 36"W X 24 1/4"D X 39 1/4"H (6" Legs Included) | | | | | Self-Contained Bin Storage Capacity Up to 110 Lbs. † | |
| | Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
| | F-300BAJ | Air-Cooled | 247 | 353 | 115V/60/1 | 6.14 | 221 Lbs. | \$8,030 |
| Accessories: | | LP-6 LEG | Four 6" Stainless Steel Legs Package available (optional) | | | | | \$219 |
| | | H9320-51 | Recommended Water Filtration - Single Configuration | | | | | \$365 |
| | | Four 6" Legs Package (LP-6P LEG) included | | | | | | |
| †Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice. | | | | | | | | |

| F-330BAJ | | Undercounter FLAKER with Built-In Bin | | | | | | |
|--|---------------------|--|---|---|-------------------|-------------------------|---|----------------------------|
| | | Dimensions: 24"W X 26"D X 39"H (6" Legs Included) | | | | | Self-Contained Bin Storage Capacity Up to 80 Lbs. † | |
| | Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
| | F-330BAJ | Air-Cooled | 243 | 332 | 115V/60/1 | 5.91 | 178 Lbs. | \$7,370 |
| Accessories: | | LP-6 LEG | Four 6" Stainless Steel Legs Package available (optional) | | | | | \$219 |
| | | H9320-51 | Recommended Water Filtration - Single Configuration | | | | | \$365 |
| | | Four 6" Legs Package (LP-6P LEG) included | | | | | | |
| †Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice. | | | | | | | | |



FLAKER

F-500BAJ

Undercounter FLAKER with Built-In Bin

Dimensions: 38"W X 29"D X 42"H (6" Legs Included)

Self-Contained Bin Storage Capacity Up to 170 Lbs.¹

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|-----------------|------------|--------------------------------------|--------------------------------------|------------|------------------|-----------------|---------------------|
| F-500BAJ | Air-Cooled | 420 | 536 | 115V/60/1 | 5.05 | 270 Lbs. | \$9,330 |

Accessories: **LP-6 LEG** Four 6" Stainless Steel Legs Package available (optional) \$219
H9320-51 Recommended Water Filtration - Single Configuration \$365

Four 6" Legs Package (**LP-6P LEG**) included

¹Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.

F-450MAJ

FLAKER

Ice Machine Dimensions: 22"W X 27^{3/8}"D X 22"H

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|------------------|------------|--------------------------------------|--------------------------------------|------------|------------------|-----------------|---------------------|
| F-450MAJ* | Air-Cooled | 395 | 492 | 115V/60/1 | 4.94 | 170 Lbs. | \$6,880 |

Accessories: **H9320-51** Recommended Water Filtration - Single Configuration \$365

*Not recommended for dispensing applications

B-250
30 x 32 1/2 x 55 3/8

B-300
22 x 32 1/2 x 68

B-500
30 x 32 1/2 x 68

B-700
44 x 32 1/2 x 68

B-800
48 x 32 1/2 x 68

B-900
52 x 32 1/2 x 68

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 35) for top kit options based on bin size.

F-801M_J

FLAKERS

Ice Machine Dimensions: 22"W X 27^{3/8}"D X 26"H

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|------------------|--------------|--------------------------------------|--------------------------------------|------------|------------------|-----------------|---------------------|
| F-801MAJ* | Air-Cooled | 566 | 751 | 115V/60/1 | 4.5 | 205 Lbs. | \$8,650 |
| F-801MWJ | Water-Cooled | 605 | 680 | 115V/60/1 | 3.9 | 205 Lbs. | \$8,820 |

Accessories: **HS-2120** Cutter head for finer flaked ice \$185
H9320-51 Recommended Water Filtration - Single Configuration \$365

*ENERGY STAR qualified

B-250
30 x 32 1/2 x 59 3/8

B-300
22 x 32 1/2 x 72

B-500
30 x 32 1/2 x 72

B-700
44 x 32 1/2 x 72

B-800
48 x 32 1/2 x 72


B-900
52 x 32 1/2 x 72


Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 35) for top kit options based on bin size.



FLAKER

F-1002M_J













FLAKERS

Ice Machine Dimensions: 22"W X 27 ^{3/8}"D X 26"H

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|--------------|--------------|--------------------------------------|--------------------------------------|------------|------------------|-----------------|---------------------|
| F-1002MAJ | Air-Cooled | 758 | 980 | 115V/60/1 | 4.36 | 210 Lbs. | \$10,710 |
| F-1002MWJ | Water-Cooled | 833 | 955 | 115V/60/1 | 3.57 | 205 Lbs. | \$10,710 |
| F-1002MRJ | Remote A-C | 722 | 907 | 115V/60/1 | 4.1 | 210 Lbs. | \$10,600 |
| F-1002MLJ | N/A | 797 | 1028 | 115V/60/1 | 1.51 | 205 Lbs. | \$9,450 |


Accessories: HS-2120 Cutter head for finer flaked ice \$185
H9320-51 Recommended Water Filtration - Single Configuration \$365






22 x 32 1/2 x 71 15/16 30 x 32 1/2 x 71 15/16 44 x 32 1/2 x 71 15/16 48 x 32 1/2 x 71 15/16 52 x 32 1/2 x 71 15/16
Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 35) for top kit options based on bin size.

F-1501M_J












FLAKERS

Ice Machine Dimensions: 30"W X 27 ^{3/8}"D X 34 ^{7/16}"H

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|--------------|--------------|--------------------------------------|--------------------------------------|-----------------|------------------|-----------------|---------------------|
| F-1501MAJ | Air-Cooled | 1154 | 1543 | 208-230V/60/1** | 4.0 | 325 Lbs. | \$13,570 |
| F-1501MWJ | Water-Cooled | 1410 | 1624 | 208-230V/60/1** | 3.20 | 325 Lbs. | \$13,600 |
| F-1501MRJ | Remote A-C | 1370 | 1705 | 208-230V/60/1** | 3.44 | 325 Lbs. | \$13,470 |


Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$365






30 x 32 1/2 x 79 1/4 44 x 32 1/2 x 79 1/4 48 x 32 1/2 x 79 1/4 52 x 32 1/2 x 79 1/4
Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 35) for top kit options based on bin size.

F-2001M_J












FLAKERS

Ice Machine Dimensions: 30"W X 27 ^{1/2}"D X 34 ^{7/16}"H

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|--------------|--------------|--------------------------------------|--------------------------------------|-----------------|------------------|-----------------|---------------------|
| F-2001MWJ | Water-Cooled | 1840 | 2043 | 208-230V/60/1** | 3.19 | 342 Lbs. | \$18,630 |
| F-2001MRJ | Remote A-C | 1660 | 2073 | 208-230V/60/1** | 3.81 | 360 Lbs. | \$18,630 |
| F-2001MRJ3 | Remote A-C | 1675 | 2098 | 208-230V/60/3* | 3.90 | 360 Lbs. | \$18,730 |
| F-2001MLJ | Air-Cooled | 1733 | 2280 | 115V/60/1 | 0.6 | 250 Lbs. | \$16,790 |

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$365








30 x 32 1/2 x 79 1/4 44 x 32 1/2 x 79 1/4 48 x 32 1/2 x 79 1/4 52 x 32 1/2 x 79 1/4
Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 35) for top kit options based on bin size.




CUBELET Self Contained




C-80BAJ

-DS shown with Custom Cabinetry

| Undercounter CUBELET with Built-In Bin | | | | | | | |
|---|------------|--------------------------------------|--------------------------------------|------------|------------------|--|---------------------|
|  Dimensions: 14 ⁷ / ₈ "W X 22 ⁵ / ₈ "D X 33 ¹ / ₂ "H The ADA compliant machine dimensions are 14 ⁷ / ₈ "W x 22 ⁵ / ₈ "D x 31 ¹ / ₂ "H | | | | | | Self-Contained Bin Storage Capacity Up to 22 Lbs. | |
| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
| C-80BAJ | Air-Cooled | 45 | 80 | 115V/60/1 | 17.3 | 130 Lbs. | \$5,360 |
| C-80BAJ-DS[†] | Air-Cooled | 45 | 80 | 115V/60/1 | 17.3 | 130 Lbs. | \$5,360 |
| C-80BAJ-AD[*] | Air-Cooled | 45 | 80 | 115V/60/1 | 17.3 | 130 Lbs. | \$5,360 |
| C-80BAJ-ADDS^{*†} | Air-Cooled | 45 | 80 | 115V/60/1 | 17.3 | 130 Lbs. | \$5,630 |


Accessories: **HS-0229** -DS Door Reversal Part (Available as a Service Part)
HS-5061 Drain Pump (Beckett Brand) 1 Year Warranty - Parts & labor \$620
HS-0182 Side Trim Kit \$242
HS-2133 2" Top Spacer Kit available \$175
H9320-51 Recommended Water Filtration - Single Configuration \$365






UL approved for outdoor use




[†]-DS Models - Wood Door System (Designed to accommodate custom cabinetry)
^{*}ADA compliant

F-330BAJ-C



| Undercounter CUBELET with Built-In Bin | | | | | | | |
|--|------------|--------------------------------------|--------------------------------------|------------|------------------|--|---------------------|
|  Dimensions: 24"W X 26"D X 39"H (6" Legs Included) | | | | | | Self-Contained Bin Storage Capacity Up to 80 Lbs.[†] | |
| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
| F-330BAJ-C | Air-Cooled | 214 | 288 | 115V/60/1 | 7.3 | 178 Lbs. | \$7,430 |


Accessories: **LP-6 LEG** Four 6" Stainless Steel Legs Package available (optional) \$219
H9320-51 Recommended Water Filtration - Single Configuration \$365






Four 6" Legs Package (**LP-6P LEG**) included




[†]Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.

F-450MAJ-C




| CUBELET | | | | | | | |
|---|------------|--------------------------------------|--------------------------------------|------------|------------------|-----------------|---------------------|
|  Ice Machine Dimensions: 22"W X 27 ³ / ₈ "D X 22"H | | | | | | | |
| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
| F-450MAJ-C[*] | Air-Cooled | 316 | 412 | 115V/60/1 | 6.10 | 170 Lbs. | \$6,960 |


Accessories: **H9320-51** Recommended Water Filtration - Single Configuration \$365


^{*}Not recommended for dispensing applications




B-250
30 x 32 1/2 x 55 3/8




B-300
22 x 32 1/2 x 68




B-500
30 x 32 1/2 x 68



B-700
44 x 32 1/2 x 68



B-800
48 x 32 1/2 x 68




B-900
52 x 32 1/2 x 68


Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 35) for top kit options based on bin size.



CUBELET

F-801M_J-C






Small

CUBELET




Ice Machine Dimensions: 22"W X 27 ^{3/8}"D X 26"H







| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|--------------------|--------------|--------------------------------------|--------------------------------------|------------|------------------|-----------------|---------------------|
| F-801MAJ-C* | Air-Cooled | 532 | 690 | 115V/60/1 | 5.00 | 205 Lbs. | \$9,010 |
| F-801MWJ-C | Water-Cooled | 580 | 632 | 115V/60/1 | 4.13 | 205 Lbs. | \$9,020 |

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$365




*ENERGY STAR qualified






30 x 32 1/2 x 59 3/8 22 x 32 1/2 x 72 30 x 32 1/2 x 72 44 x 32 1/2 x 72 48 x 32 1/2 x 72 52 x 32 1/2 x 72
Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 35) for top kit options based on bin size.

F-1002M_J-C








Small






CUBELET

Ice Machine Dimensions: 22"W X 27 ^{3/8}"D X 26"H

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|--------------------|--------------|--------------------------------------|--------------------------------------|------------|------------------|-----------------|---------------------|
| F-1002MAJ-C | Air-Cooled | 726 | 890 | 115V/60/1 | 4.57 | 210 Lbs. | \$10,830 |
| F-1002MWJ-C | Water-Cooled | 703 | 790 | 115V/60/1 | 3.8 | 210 Lbs. | \$10,830 |
| F-1002MRJ-C | Remote A-C | 680 | 821 | 115V/60/1 | 4.94 | 210 Lbs. | \$10,780 |

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$365













22 x 32 1/2 x 71 15/16 30 x 32 1/2 x 71 15/16 44 x 32 1/2 x 71 15/16 48 x 32 1/2 x 71 15/16 52 x 32 1/2 x 71 15/16
Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 35) for top kit options based on bin size.

Use URC-5F Condenser for Remote Air-Cooled Unit

F-1501M_J-C








Medium





CUBELET

Ice Machine Dimensions: 30"W X 27 ^{3/8}"D X 34 ^{7/16}"H

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|--------------------|--------------|--------------------------------------|--------------------------------------|-----------------|------------------|-----------------|---------------------|
| F-1501MAJ-C | Air-Cooled | 1020 | 1327 | 208-230V/60/1** | 4.61 | 325 Lbs. | \$13,620 |
| F-1501MWJ-C | Water-Cooled | 1218 | 1376 | 208-230V/60/1** | 3.76 | 325 Lbs. | \$13,620 |
| F-1501MRJ-C | Remote A-C | 1125 | 1335 | 208-230V/60/1** | 4.35 | 315 Lbs. | \$13,510 |

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$365


30 x 32 1/2 x 79 1/4 44 x 32 1/2 x 79 1/4 48 x 32 1/2 x 79 1/4 52 x 32 1/2 x 79 1/4
Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 35) for top kit options based on bin size.


Use URC-14F Condenser for Remote Air-Cooled Unit



CUBELET

F-2001MRJ-C








Medium

CUBELET


Ice Machine Dimensions: 30"W x 27 1/2"D x 34 7/16"H

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|--------------------|------------|--------------------------------------|--------------------------------------|-----------------|------------------|-----------------|---------------------|
| F-2001MRJ-C | Remote A-C | 1500 | 1832 | 208-230V/60/1** | 4.35 | 360 Lbs. | \$19,120 |

Accessories: **H9320-51** Recommended Water Filtration - Single Configuration \$365


Use URC-22F Condenser for Remote Air-Cooled Unit




30 x 32 1/2 x 79 1/4 44 x 32 1/2 x 79 1/4 48 x 32 1/2 x 79 1/4 52 x 32 1/2 x 79 1/4

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 35) for top kit options based on bin size.

FD-650M_H-C









Small

CUBELET

Ice Machine Dimensions: 22"W X 24"D X 26"H


| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|---------------------|--------------|--------------------------------------|--------------------------------------|------------|------------------|-----------------|---------------------|
| FD-650MAH-C | Air-Cooled | 474 | 650 | 115V/60/1 | 5.35 | 205 Lbs. | \$8,220 |
| FD-650MWH-C | Water-Cooled | 532 | 615 | 115V/60/1 | 3.81 | 205 Lbs. | \$8,220 |
| FD-650MRH-C* | Remote A-C | 476 | 590 | 115V/60/1 | 4.75 | 205 Lbs. | \$8,120 |

Accessories: **H9320-51** Recommended Water Filtration - Single Configuration \$365

Use URC-5F Condenser for Remote Air-Cooled Unit


***ENERGY STAR qualified**

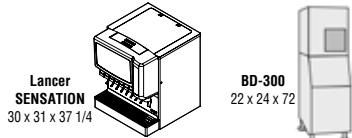


Lancer SENSATION 30 x 31 x 37 1/4 BD-300 22 x 24 x 72

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 35) for top kit options based on bin size.

FD-1002M_J-C








Small

CUBELET


Ice Machine Dimensions: 22"W X 24"D X 26"H

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|---------------------|------------|--------------------------------------|--------------------------------------|------------|------------------|-----------------|---------------------|
| FD-1002MAJ-C | Air-Cooled | 726 | 890 | 115V/60/1 | 4.57 | 210 Lbs. | \$11,490 |
| FD-1002MRJ-C | Remote A-C | 680 | 821 | 115V/60/1 | 4.94 | 210 Lbs. | \$11,310 |

Accessories: **H9320-51** Recommended Water Filtration - Single Configuration \$365

Use URC-5F Condenser for Remote Air-Cooled Unit

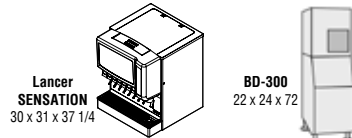


Lancer SENSATION 30 x 31 x 37 1/4 BD-300 22 x 24 x 72


Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 35) for top kit options based on bin size.



CUBELET Serenity

FS-1001MLJ-C








Small

CUBELET


Ice Machine Dimensions: 30"W X 11"D X 26"H

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W 70°A / 50°W | Electrical | kWh per 100 Lbs. 90°A / 70°W 70°A / 50°W | Shipping Weight | List F.O.B. Griffin |
|---------------------|------------|---|------------|---|-----------------|---------------------|
| FS-1001MLJ-C | Remote A-C | 720 851 | 115V/60/1 | 5.07 4.29 | 166 Lbs. | \$10,160 |

Accessories: **H9320-51** Recommended Water Filtration - Single Configuration \$365







Use SRC-10J Condenser for Remote Air-Cooled Unit



Lancer
SENSATION
30 x 31 x 37 1/4

FS-1022MLJ-C








Small

CUBELET


Ice Machine Dimensions: 22"W X 16 1/2"D X 26"H

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W 70°A / 50°W | Electrical | kWh per 100 Lbs. 90°A / 70°W 70°A / 50°W | Shipping Weight | List F.O.B. Griffin |
|---------------------|------------|---|------------|---|-----------------|---------------------|
| FS-1022MLJ-C | Remote A-C | 730 889 | 115V/60/1 | 5.10 3.93 | 150 Lbs. | \$10,160 |

Accessories: **H9320-51** Recommended Water Filtration - Single Configuration \$365







Use SRC-10J Condenser for Remote Air-Cooled Unit



Lancer
SENSATION
30 x 31 x 37 1/4

FS-1500MLJ-C








Medium

CUBELET


Ice Machine Dimensions: 30"W X 16 1/2"D X 33"H

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W 70°A / 50°W | Electrical | kWh per 100 Lbs. 90°A / 70°W 70°A / 50°W | Shipping Weight | List F.O.B. Griffin |
|---------------------|------------|---|------------|---|-----------------|---------------------|
| FS-1500MLJ-C | Remote A-C | 1125 1386 | 115V/60/1 | 4.75 3.67 | 222 Lbs. | \$12,770 |

Accessories: **H9320-51** Recommended Water Filtration - Single Configuration \$365

Use SRC-14J Condenser for Remote Air-Cooled Unit



Lancer
SENSATION
30 x 31 x 37 1/4





DISPENSER

Features & Benefits of HOSHIZAKI Dispensers

- Attractive stainless steel exterior provides long life and easy maintenance
- **KMEdge** dispensers feature a built-in insulated storage bin
- Three dimensional agitation prevents clumping and assists in delivering ice conveniently
- **DKM Hotel Dispenser** features the industry's only one-piece design and is 35% quieter than other hotel dispensers
- **DB Series** accommodates KM Series & KMEdge cubers
- **DCM Series** dispenses easy to chew cubelet ice and water
- HOSHIZAKI's **DCM Opti-Serve™ Series** offers hands-free dispensing and helps eliminate the possibility of cross-contamination
- All dispensers feature built-in ice storage capacity

DCM-270BAH





Mini

CUBELET Ice & Water Dispenser




| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|-------------------|------------|--------------------------------------|--------------------------------------|------------|------------------|-----------------|---------------------|
| DCM-270BAH | Air-Cooled | 215 | 282 | 115V/60/1 | 7.6 | 170 Lbs. | \$7,650 |


Ice Machine/Dispenser Dimensions:
16 9/16" W X 24 1/8" D X 31 11/16" H (4" Legs Included)

**Ice Bin Storage Capacity
Up to 10 Lbs.†**


Accessories:

| | | |
|-----------------|---|---------|
| LP-4 LEG | Four 4" Stainless Steel Legs Package available (optional) | \$197 |
| SD-270 | Equipment Stand | \$1,250 |
| HS-2070 | Seismic Wall Mount Kit | \$175 |
| HS-2104 | Wall Mount Kit | \$810 |
| H9320-51 | Recommended Water Filtration - Single Configuration | \$365 |



Floor Model
with Optional Stand
16 9/16 x 24 1/8 x 66 7/8
W x D x H





Counter-Top
with 4" Legs
16 9/16 x 24 1/8 x 31 11/16
W x D x H

Four 4" Legs included

†Rated in accordance with AHRI Standard 820(I-P).
Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.

DCM-300BAH





Mini

CUBELET Ice & Water Dispenser




| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|-------------------|------------|--------------------------------------|--------------------------------------|------------|------------------|-----------------|---------------------|
| DCM-300BAH | Air-Cooled | 232 | 321 | 115V/60/1 | 6.84 | 240 Lbs. | \$9,770 |


Ice Machine/Dispenser Dimensions: 26"W X 22 1/2"D X 40"H

**Ice Bin Storage Capacity
Up to 40 Lbs.†**


Accessories:

| | | |
|------------------|---|---------|
| LP-6P LEG | Four 6" Painted Legs Package available | \$207 |
| LP-6 LEG | Four 6" Stainless Steel Legs Package available | \$219 |
| SD-500 | Equipment Stand | \$1,350 |
| Leg Kits: | HS-2066 Seismic Wall Mount Kit | \$185 |
| | HS-2071 Leg Seismic Kit | \$391 |
| H9320-51 | Recommended Water Filtration - Single Configuration | \$365 |








Counter-Top
26 x 22 1/2 x 40
W x D x H



Counter-Top
with Optional 6" Legs
26 x 22 1/2 x 46
W x D x H



Floor Model
with Optional Stand
26 x 22 1/2 x 72 1/2
W x D x H


Unit supplied without legs


†Rated in accordance with AHRI Standard 820(I-P).
Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.



DISPENSER

DCM-500B_H





CUBELET Ice & Water Dispenser




Ice Machine/Dispenser Dimensions: 26"W X 22 1/2"D X 40"H


Ice Bin Storage Capacity Up to 40 Lbs.†

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|-------------------|--------------|--------------------------------------|--------------------------------------|------------|------------------|-----------------|---------------------|
| DCM-500BAH | Air-Cooled | 450 | 618 | 115V/60/1 | 5.62 | 276 Lbs. | \$11,690 |
| DCM-500BWH | Water-Cooled | 512 | 590 | 115V/60/1 | 4.48 | 269 Lbs. | \$11,690 |


Accessories:

- LP-6P LEG** Four 6" Painted Legs Package available \$207
- LP-6 LEG** Four 6" Stainless Steel Legs Package available \$219
- SD-500** Equipment Stand \$1,350
- Leg Kits: **HS-2066** Seismic Wall Mount Kit \$185
- HS-2071** Leg Seismic Kit \$391
- H9320-51** Recommended Water Filtration - Single Configuration \$365








Counter-Top
26 x 22 1/2 x 40
W x D x H




Counter-Top with Optional 6" Legs
26 x 22 1/2 x 46
W x D x H




Floor Model with Optional Stand
26 x 22 1/2 x 72 1/2
W x D x H

Unit supplied without legs
†Rated in accordance with AHRI Standard 820(I-P).
Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.

DCM-751B_H





CUBELET Ice & Water Dispenser




Ice Machine/Dispenser Dimensions: 34 1/16"W X 28 1/2"D X 48 1/16"H


Ice Bin Storage Capacity Up to 95 Lbs.†

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|-------------------|--------------|--------------------------------------|--------------------------------------|------------|------------------|-----------------|---------------------|
| DCM-751BAH | Air-Cooled | 583 | 801 | 115V/60/1 | 5.94 | 345 Lbs. | \$16,240 |
| DCM-751BWH | Water-Cooled | 678 | 782 | 115V/60/1 | 4.76 | 345 Lbs. | \$16,240 |


Accessories:

- LP-6P LEG** Four 6" Painted Legs Package available \$207
- LP-6 LEG** Four 6" Stainless Steel Legs Package available \$219
- SD-750** Equipment Stand \$1,700
- Leg Kits: **HS-2067** Seismic Wall Mount Kit \$232
- HS-2072** Leg Seismic Kit \$391
- H9320-51** Recommended Water Filtration - Single Configuration \$365








Counter-Top
34 1/16 x 28 1/2 x 48 1/16
W x D x H




Counter-Top with Optional 6" Legs
34 1/16 x 28 1/2 x 54 1/16
W x D x H




Floor Model with Optional Stand
34 1/16 x 28 1/2 x 80 1/2
W x D x H

Unit supplied without legs
†Rated in accordance with AHRI Standard 820(I-P).
Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.

DCM-270BAH-OS





CUBELET Ice & Water Opti-Serve™ Dispenser

Hands-free sensor designed for use with opaque containers. Not intended for outdoor use - avoid placement in direct sunlight.




Ice Machine/Dispenser Dimensions:
16 9/16" W X 24 1/8"D X 31 11/16"H (4" Legs Included)


Ice Bin Storage Capacity Up to 10 Lbs.†

| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|----------------------|------------|--------------------------------------|--------------------------------------|------------|------------------|-----------------|---------------------|
| DCM-270BAH-OS | Air-Cooled | 220 | 288 | 115V/60/1 | 7.3 | 170 Lbs. | \$7,750 |


Accessories:

- LP-4 LEG** Four 4" Stainless Steel Legs Package available \$197
- SD-270** Equipment Stand \$1,250
- HS-2070** Seismic Wall Mount Kit \$175
- HS-2104** Wall Mount Kit \$810
- H9320-51** Recommended Water Filtration - Single Configuration \$365



Floor Model with Optional Stand
16 9/16 x 24 1/8 x 66 7/8
W x D x H




Counter-Top with 4" Legs
16 9/16 x 24 1/8 x 31 11/16
W x D x H


Four 4" Legs included
†Rated in accordance with AHRI Standard 820(I-P).
Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.



DISPENSER

DCM-300BAH-OS





Mini




CUBELET Ice & Water Opti-Serve™ Dispenser

Hands-free sensor designed for use with opaque containers. Not intended for outdoor use - avoid placement in direct sunlight.

| Ice Machine/Dispenser Dimensions: 26"W X 22 1/2"D X 40"H | | | | | | Ice Bin Storage Capacity Up to 40 Lbs.† | |
|--|------------|--------------------------------------|--------------------------------------|------------|------------------|--|---------------------|
| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
| DCM-300BAH-OS | Air-Cooled | 232 | 321 | 115V/60/1 | 6.84 | 240 Lbs. | \$9,870 |


Accessories:

- LP-6P LEG** Four 6" Painted Legs Package available \$207
- LP-6 LEG** Four 6" Stainless Steel Legs Package available \$219
- SD-500** Equipment Stand \$1,350
- Leg Kits: **HS-2066** Seismic Wall Mount Kit \$185
- HS-2071** Leg Seismic Kit \$391
- H9320-51** Recommended Water Filtration - Single Configuration \$365






Unit supplied without legs


†Rated in accordance with AHRI Standard 820(I-P).
Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.



Counter-Top
26 x 22 1/2 x 40
W x D x H





**Counter-Top
with Optional 6" Legs**
26 x 22 1/2 x 46
W x D x H



**Floor Model
with Optional Stand**
26 x 22 1/2 x 72 1/2
W x D x H

DCM-500B_H-OS





Small




CUBELET Ice & Water Opti-Serve™ Dispenser

Hands-free sensor designed for use with opaque containers. Not intended for outdoor use - avoid placement in direct sunlight.

| Ice Machine/Dispenser Dimensions: 26"W X 22 1/2"D X 40"H | | | | | | Ice Bin Storage Capacity Up to 40 Lbs.† | |
|--|--------------|--------------------------------------|--------------------------------------|------------|------------------|--|---------------------|
| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
| DCM-500BAH-OS | Air-Cooled | 450 | 618 | 115V/60/1 | 5.62 | 276 Lbs. | \$11,790 |
| DCM-500BWH-OS | Water-Cooled | 512 | 590 | 115V/60/1 | 4.48 | 269 Lbs. | \$11,790 |


Accessories:

- LP-6P LEG** Four 6" Painted Legs Package available \$207
- LP-6 LEG** Four 6" Stainless Steel Legs Package available \$219
- SD-500** Equipment Stand \$1,350
- Leg Kits: **HS-2066** Seismic Wall Mount Kit \$185
- HS-2071** Leg Seismic Kit \$391
- H9320-51** Recommended Water Filtration - Single Configuration \$365






Unit supplied without legs


†Rated in accordance with AHRI Standard 820(I-P).
Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.



Counter-Top
26 x 22 1/2 x 40
W x D x H



**Counter-Top
with Optional 6" Legs**
26 x 22 1/2 x 46
W x D x H



**Floor Model
with Optional Stand**
26 x 22 1/2 x 72 1/2
W x D x H



DISPENSER

DCM-751B_H-OS



CUBELET Ice & Water Opti-Serve™ Dispenser

Hands-free sensor designed for use with opaque containers. Not intended for outdoor use - avoid placement in direct sunlight.

Ice Machine/Dispenser Dimensions: 34 1/16"W X 28 1/2"D X 48 1/16"H

Ice Bin Storage Capacity
Up to 95 Lbs.†



| Model Number | Condenser | Lbs. of Ice per 24 hours 90°A / 70°W | Lbs. of Ice per 24 hours 70°A / 50°W | Electrical | kWh per 100 Lbs. | Shipping Weight | List F.O.B. Griffin |
|---------------|--------------|--------------------------------------|--------------------------------------|------------|------------------|-----------------|---------------------|
| DCM-751BAH-OS | Air-Cooled | 583 | 801 | 115V/60/1 | 5.94 | 345 Lbs. | \$16,340 |
| DCM-751BWH-OS | Water-Cooled | 678 | 782 | 115V/60/1 | 4.76 | 345 Lbs. | \$16,340 |


Accessories: LP-6P LEG Four 6" Painted Legs Package available \$207
 LP-6 LEG Four 6" Stainless Steel Legs Package available \$219
 SD-750 Equipment Stand \$1,700
 Leg Kits: HS-2067 Seismic Wall Mount Kit \$232
 HS-2072 Leg Seismic Kit \$391
 H9320-51 Recommended Water Filtration - Single Configuration \$365



Unit supplied without legs

†Rated in accordance with AHRI Standard 820(I-P).
 Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.

DB-130H



KMEdge DB Dispenser

Dispenser Dimensions: 22"W X 30"D X 53"H (6" Legs Included)



| Model Number | Application Ice Storage Capacity | Dispensing Rate | Electrical | Icemaker kWh per 100 lbs. | Shipping Weight | List F.O.B. Griffin |
|--------------|----------------------------------|-----------------|------------|---------------------------|-----------------|---------------------|
| DB-130H | 130 Lbs. | 20 lbs. / min. | 115V/60/1 | N/A | 215 Lbs. | \$5,120 |


Accessories: LP-6 FLANGE LEG Four 6" Stainless Steel Legs Package available \$262
 HS-2109 Chute & grill replacement kit \$318




Four Painted 6" Flange Legs included

Note: 90 Day Warranty on accessory parts

Ice dispensing area is ADA compliant

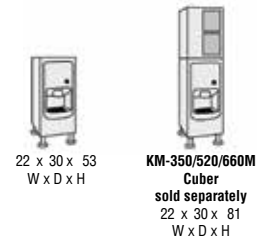

DB-200H



KMEdge DB Dispenser

Dispenser Dimensions: 30"W X 30"D X 53"H (6" Legs Included)



| Model Number | Application Ice Storage Capacity | Dispensing Rate | Electrical | Icemaker kWh per 100 lbs. | Shipping Weight | List F.O.B. Griffin |
|--------------|----------------------------------|-----------------|------------|---------------------------|-----------------|---------------------|
| DB-200H | 200 Lbs. | 13 lbs. / min. | 115V/60/1 | N/A | 240 Lbs. | \$5,760 |


Accessories: HS-2036 Top Kit for KM-350M, KM-520M or KM-660M \$197
 LP-6 LEG Four 6" Stainless Steel Legs Package available \$219
 HS-2109 Chute & grill replacement kit \$318



Four Painted 6" Flange Legs included







Note: 90 Day Warranty on accessory parts








Ice dispensing area is ADA compliant










DISPENSER

|  |  | KMEdge DKM Dispenser | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|----------------------------------|---------------------------|-----------------|---------------------------|-----------------|---------------------|-------------|----------|----------|----------------|-----------|------|----------|-----------------|------------|----------|----------|----------------|-----------|------|----------|-----------------|--|--|--|--|--|
| | | Ice Machine/Dispenser Dimensions: 30"W X 28"D X 77"H (6" Legs Included) | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Model Number</th> <th>Lbs. of Ice per 24 hours 70°A / 50°W</th> <th>Application Ice Storage Capacity</th> <th>Dispensing Rate</th> <th>Electrical</th> <th>Icemaker kWh per 100 lbs.</th> <th>Shipping Weight</th> <th>List F.O.B. Griffin</th> </tr> </thead> <tbody> <tr> <td>*DKM-500BAJ</td> <td>545 Lbs.</td> <td>200 Lbs.</td> <td>13 lbs. / min.</td> <td>115V/60/1</td> <td>5.56</td> <td>410 Lbs.</td> <td>\$11,820</td> </tr> <tr> <td>DKM-500BWJ</td> <td>540 Lbs.</td> <td>200 Lbs.</td> <td>13 lbs. / min.</td> <td>115V/60/1</td> <td>4.79</td> <td>372 Lbs.</td> <td>\$11,820</td> </tr> </tbody> </table> | Model Number | Lbs. of Ice per 24 hours 70°A / 50°W | Application Ice Storage Capacity | Dispensing Rate | Electrical | Icemaker kWh per 100 lbs. | Shipping Weight | List F.O.B. Griffin | *DKM-500BAJ | 545 Lbs. | 200 Lbs. | 13 lbs. / min. | 115V/60/1 | 5.56 | 410 Lbs. | \$11,820 | DKM-500BWJ | 540 Lbs. | 200 Lbs. | 13 lbs. / min. | 115V/60/1 | 4.79 | 372 Lbs. | \$11,820 | <p>Accessories: HS-3586 6" Casters - Set of 4 \$448 H9320-51 Recommended Water Filtration - Single Configuration \$365</p> <p>     Rated in accordance with AHRI Standard 820 </p> <p>Four 6" Legs included DKM-500B - Ice dispensing area is ADA compliant *ENERGY STAR qualified</p> | | | | |
| Model Number | Lbs. of Ice per 24 hours 70°A / 50°W | Application Ice Storage Capacity | Dispensing Rate | Electrical | Icemaker kWh per 100 lbs. | Shipping Weight | List F.O.B. Griffin | | | | | | | | | | | | | | | | | | | | | | | |
| *DKM-500BAJ | 545 Lbs. | 200 Lbs. | 13 lbs. / min. | 115V/60/1 | 5.56 | 410 Lbs. | \$11,820 | | | | | | | | | | | | | | | | | | | | | | | |
| DKM-500BWJ | 540 Lbs. | 200 Lbs. | 13 lbs. / min. | 115V/60/1 | 4.79 | 372 Lbs. | \$11,820 | | | | | | | | | | | | | | | | | | | | | | | |

|  |  | KMEdge DM Dispenser | | | | | | | | | | | | | | | | | | | | |
|---|---|--|----------------------------------|---------------------------------|---------------------------|---------------------------------|---------------------------|-----------------|---------------------|---------|----------|-----------------|---------------|-----|-----|----------|----------------|---|--|--|--|--|
| | | Dispenser Dimensions: 30"W X 28"D X 36 ^{3/8} "H | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Model Number</th> <th>Application Ice Storage Capacity</th> <th>Dispensing Rate</th> <th>Electrical</th> <th>Icemaker Production per 24 hrs.</th> <th>Icemaker kWh per 100 lbs.</th> <th>Shipping Weight</th> <th>List F.O.B. Griffin</th> </tr> </thead> <tbody> <tr> <td>DM-200B</td> <td>200 lbs.</td> <td>7.5 lbs. / min.</td> <td>115-120V/60/1</td> <td>N/A</td> <td>N/A</td> <td>240 Lbs.</td> <td>\$5,920</td> </tr> </tbody> </table> | Model Number | Application Ice Storage Capacity | Dispensing Rate | Electrical | Icemaker Production per 24 hrs. | Icemaker kWh per 100 lbs. | Shipping Weight | List F.O.B. Griffin | DM-200B | 200 lbs. | 7.5 lbs. / min. | 115-120V/60/1 | N/A | N/A | 240 Lbs. | \$5,920 | <p>Accessories: HS-2036 Top Kit for KM-340M, KM-515M or KM-650M \$197 DM Legs Four 4" Black Die Cast Legs Kit \$165 SD-200 Equipment Stand \$1,680</p> <p>    CANADIAN ENERGY PERFORMANCE VERIFIED RENDEMENT ENERGETIQUE VERIFIE </p> <p>Unit supplied without legs</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;">  <p>Counter-Top 30 x 28 x 36 3/8 W x D x H</p> </div> <div style="text-align: center;">  <p>Counter-Top with optional 4" legs 30 x 28 x 40 3/8 W x D x H</p> </div> </div> | | | | |
| Model Number | Application Ice Storage Capacity | Dispensing Rate | Electrical | Icemaker Production per 24 hrs. | Icemaker kWh per 100 lbs. | Shipping Weight | List F.O.B. Griffin | | | | | | | | | | | | | | | |
| DM-200B | 200 lbs. | 7.5 lbs. / min. | 115-120V/60/1 | N/A | N/A | 240 Lbs. | \$5,920 | | | | | | | | | | | | | | | |

|  |  | CUBELET Ice & Water Dispenser | | | | | | | | | | | | | | | | | | | | |
|---|--|--|----------------------------------|---------------------------------|---------------------------|---------------------------------|---------------------------|-----------------|---------------------|----------|----------|-----|---------------|-----|-----|----------|----------------|--|--|--|--|--|
| | | Dimensions: 22"W X 30 ^{1/2} "D X 40"H | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Model Number</th> <th>Application Ice Storage Capacity</th> <th>Dispensing Rate</th> <th>Electrical</th> <th>Icemaker Production per 24 hrs.</th> <th>Icemaker kWh per 100 lbs.</th> <th>Shipping Weight</th> <th>List F.O.B. Griffin</th> </tr> </thead> <tbody> <tr> <td>DM-4420N</td> <td>200 lbs.</td> <td>N/A</td> <td>115-120V/60/1</td> <td>N/A</td> <td>N/A</td> <td>185 Lbs.</td> <td>\$6,430</td> </tr> </tbody> </table> | Model Number | Application Ice Storage Capacity | Dispensing Rate | Electrical | Icemaker Production per 24 hrs. | Icemaker kWh per 100 lbs. | Shipping Weight | List F.O.B. Griffin | DM-4420N | 200 lbs. | N/A | 115-120V/60/1 | N/A | N/A | 185 Lbs. | \$6,430 | <p>Accessories: HS-5329 Top Kit for for FS-1022M \$129 HS-5330 Top Kit for for FD-650M & FD-1002M \$385</p> <p>    CANADIAN ENERGY PERFORMANCE VERIFIED RENDEMENT ENERGETIQUE VERIFIE </p> | | | | |
| Model Number | Application Ice Storage Capacity | Dispensing Rate | Electrical | Icemaker Production per 24 hrs. | Icemaker kWh per 100 lbs. | Shipping Weight | List F.O.B. Griffin | | | | | | | | | | | | | | | |
| DM-4420N | 200 lbs. | N/A | 115-120V/60/1 | N/A | N/A | 185 Lbs. | \$6,430 | | | | | | | | | | | | | | | |




ICE STORAGE BINS


HOSHIZAKI Ice Storage Bins are available with either stainless steel or vinyl clad exterior for easy cleaning and long lasting attractive appearance. Sturdy construction for side-by-side or stacked installations and non-corrosive bin liner provide safe, sanitary storage of cubed or flaked ice. Foamed-in-place polyurethane insulation in all bin walls and bottom provides dependable ice storage. H-GUARD Plus® Antimicrobial Agent adds extra protection to the ice scoop. (included)




CANADIAN ENERGY
PERFORMANCE VERIFIED
RENDMENT ENERGETIQUE VERIFIE








| B-250PF | | Model Number | Exterior Finish | Application Ice Storage Capacity | Dimensions W x D x H (Height includes 6" legs) | Shipping Weight | List F.O.B. Griffin |
|--|---|--------------|-----------------|---|---|-----------------|------------------------|
|  | B-250PF | Vinyl Clad | 250 Lbs. | 30" x 32 ^{1/2} " x 33 ^{3/8} " | 130 Lbs. | \$1,670 | |
| | Accessories LP-6 LEG Four 6" Stainless Steel Legs Package available \$219 HS-2033 Order 8" Top Kit to accommodate 22"W ice machines \$207 Four 6" Painted Legs included Refer to Top Kit Matrix for necessary configurations | | | | | | |

| B-300PF / SF BD-300PF / SF** | | Model Number | Exterior Finish | Application Ice Storage Capacity | Dimensions W x D x H (Height includes 6" legs) | Shipping Weight | List F.O.B. Griffin |
|--|---|-----------------|-----------------|-------------------------------------|---|-----------------|------------------------|
|  | B-300SF | Stainless Steel | 300 Lbs. | 22" x 32 ^{1/2} " x 46" | 135 Lbs. | \$1,910 | |
| | B-300PF | Vinyl Clad | 300 Lbs. | 22" x 32 ^{1/2} " x 46" | 135 Lbs. | \$1,800 | |
| | Accessories LP-6 FLANGE LEG Four 6" Stainless Steel Flange Legs Package available \$262 Four 6" Painted Legs included Refer to Top Kit Matrix for necessary configurations | | | | | | |
| | BD-300SF | Stainless Steel | 300 Lbs. | 22" x 32 ^{1/2} " x 46" | 135 Lbs. | \$1,950 | |
| | BD-300PF | Vinyl Clad | 300 Lbs. | 22" x 32 ^{1/2} " x 46" | 135 Lbs. | \$1,840 | |
| Accessories LP-6 FLANGE LEG Four 6" Stainless Steel Flange Legs Package available \$262 For use with KMD-410M, KMS-822M, FD-650M-C, FD-1001M-C **BD Bins fit 24" to 24 1/2" deep Ice Machines without Top Kit extension Four 6" Flange Legs included | | | | | | | |

| B-500PF / SF BD-500PF / SF** | | Model Number | Exterior Finish | Application Ice Storage Capacity | Dimensions W x D x H (Height includes 6" legs) | Shipping Weight | List F.O.B. Griffin |
|--|--|-----------------|-----------------|-------------------------------------|---|-----------------|------------------------|
|  | B-500SF | Stainless Steel | 500 Lbs. | 30" x 32 ^{1/2} " x 46" | 155 Lbs. | \$2,100 | |
| | B-500PF | Vinyl Clad | 500 Lbs. | 30" x 32 ^{1/2} " x 46" | 155 Lbs. | \$1,990 | |
| | Accessories LP-6 LEG Four 6" Stainless Steel Legs Package available \$219 HS-2033 Order 8" Top Kit to accommodate 22"W ice machines \$207 HS-2129 Top Kit: KMD application \$262 Four 6" Painted Legs included Refer to Top Kit Matrix for necessary configurations | | | | | | |
| | BD-500SF | Stainless Steel | 500 Lbs. | 30" x 32 ^{1/2} " x 46" | 155 Lbs. | \$2,120 | |
| | BD-500PF | Vinyl Clad | 500 Lbs. | 30" x 32 ^{1/2} " x 46" | 155 Lbs. | \$2,010 | |
| Accessories LP-6 LEG Four 6" Stainless Steel Legs Package available \$219 For use with KMD-460M, KMD-530M, KMD-860M **BD Bins fit 24" to 24 1/2" deep Ice Machines without Top Kit extension Four 6" Painted Legs included | | | | | | | |




ICE STORAGE BINS

| B-700PF / SF | | Model Number | Exterior Finish | Application Ice Storage Capacity | Dimensions W x D x H (Height includes 6" legs) | Shipping Weight | List F.O.B. Griffin |
|---|---|-----------------|-----------------|----------------------------------|--|-----------------|---------------------|
|  | B-700SF | Stainless Steel | 700 Lbs. | 44" x 32 ^{1/2} " x 46" | 200 Lbs. | \$2,530 | |
| | B-700PF | Vinyl Clad | 700 Lbs. | 44" x 32 ^{1/2} " x 46" | 200 Lbs. | \$2,360 | |
| | Accessories LP-6 LEG Four 6" Stainless Steel Legs Package available \$219 HS-2035 Order 22" Top Kit to accommodate 22"W ice machines \$232 HS-2034 Order 14" Top Kit to accommodate 30"W ice machines \$219 HS-2130 Top Kit: KMD application \$297 Four 6" Painted Legs included Refer to Top Kit Matrix for necessary configurations | | | | | | |
| B-800PF / SF | | Model Number | Exterior Finish | Application Ice Storage Capacity | Dimensions W x D x H (Height includes 6" legs) | Shipping Weight | List F.O.B. Griffin |
|  | B-800SF | Stainless Steel | 800 Lbs. | 48" x 32 ^{1/2} " x 46" | 210 Lbs. | \$2,770 | |
| | B-800PF | Vinyl Clad | 800 Lbs. | 48" x 32 ^{1/2} " x 46" | 210 Lbs. | \$2,600 | |
| | Accessories LP-6 LEG Four 6" Stainless Steel Legs Package available \$219 HS-2035 22" Top Kit & HS-2032 - 4" Top Kit to accommodate 22"W ice machines \$429 HS-2032 4" Top Kit to accommodate (2) 22"W ice machines \$197 HS-2034 Order 14" Top Kit & HS-2032 - 4" Top Kit to accommodate 30"W machines \$416 HS-2131 Top Kit: KMD application \$360 Four 6" Painted Legs included Refer to Top Kit Matrix for necessary configurations | | | | | | |
| B-900PF / SF | | Model Number | Exterior Finish | Application Ice Storage Capacity | Dimensions W x D x H (Height includes 6" legs) | Shipping Weight | List F.O.B. Griffin |
|  | B-900SF | Stainless Steel | 900 Lbs. | 52" x 32 ^{1/2} " x 46" | 220 Lbs. | \$2,980 | |
| | B-900PF | Vinyl Clad | 900 Lbs. | 52" x 32 ^{1/2} " x 46" | 220 Lbs. | \$2,820 | |
| | Accessories LP-6 LEG Four 6" Stainless Steel Legs Package available \$219 HS-2035 Order 22" Top Kit to accommodate 30"W ice machines \$232 HS-2035 22" Top Kit & HS-2033 - 8" Top Kit to accommodate 22"W ice machines \$439 HS-2033 8" Top Kit to accommodate (2) 22"W machines \$207 HS-2032 4" Top Kit to accommodate 48"W ice machines \$197 HS-2132 Top Kit: KMD application \$438 Four 6" Painted Legs included Refer to Top Kit Matrix for necessary configurations | | | | | | |
| B-1150SS / B-1300SS | | Model Number | Exterior Finish | Application Ice Storage Capacity | Dimensions W x D x H (Height includes 6" legs) | Shipping Weight | List F.O.B. Griffin |
|  | B-1150SS | Stainless Steel | 1148 Lbs. | 48" x 41" x 60" | 345 Lbs. | \$5,830 | |
| | B-1300SS | Stainless Steel | 1304 Lbs. | 48" x 41" x 66" | 365 Lbs. | \$5,950 | |
| | Accessories LP-6 LEG Four 6" Stainless Steel Legs Package available \$219 *Depth including 10" for door installation Four 6" Die-cast Legs included, baffle design increases ice accessibility by 30% Universal top included - Check Top Kit Application Guide for detail | | | | | | |
| B-1500SS / B-1650SS | | Model Number | Exterior Finish | Application Ice Storage Capacity | Dimensions W x D x H (Height includes 6" legs) | Shipping Weight | List F.O.B. Griffin |
|  | B-1500SS | Stainless Steel | 1500 Lbs. | 60" x 41" x 62" | 395 Lbs. | \$6,650 | |
| | B-1650SS | Stainless Steel | 1605 Lbs. | 60" x 41" x 66" | 415 Lbs. | \$6,940 | |
| | Accessories LP-6 LEG Four 6" Stainless Steel Legs Package available \$219 *Depth including 10" for door installation Four 6" Die-cast Legs included, baffle design increases ice accessibility by 30% Universal top included - Check Top Kit Application Guide for detail | | | | | | |



DISPENSER STAND

| SD STANDS DM and DCM Series Dispensers | Model Number | Use with Ice Machine / Dispenser Model | Dimensions W x D x H (Height includes 6" legs) | Shipping Weight | List F.O.B. Griffin |
|---|---------------|---|---|--------------------|------------------------|
| | SD-200 | DM-200B | 30" x 28" x 32 ^{13/16"} | 125 lbs. | \$1,680 |
| | SD-270 | DCM-270 (-OS) | 16 ^{1/2"} x 24" x 35 ^{3/16"} | 95 lbs. | \$1,250 |
| | SD-500 | DCM-300 (-OS) / DCM-500 (-OS) | 25 ^{7/8"} x 22" x 32 ^{3/4"} | 100 lbs. | \$1,350 |
| | SD-750 | DCM-751 (-OS) | 34" x 28" x 32 ^{3/4"} | 125 lbs. | \$1,700 |
| Accessories LP-6 FLANGE LEG Four 6" Stainless Steel Flange Legs Package available (optional) | | | | | \$262 |
| Leg Kits: HS-2066 Seismic Kit for SD 500 Stands | | | | | \$185 |
| HS-2071 Leg Seismic Kit SD 500 Stands | | | | | \$391 |
| Four 6" Painted Legs included | | | | | |

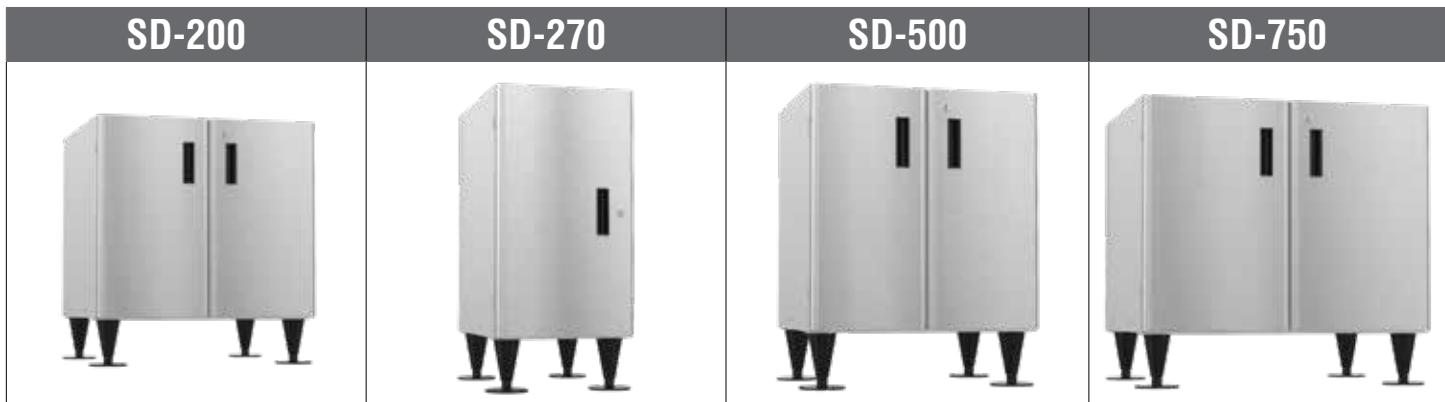

- Heavy duty stands for floor model ice machines/dispensers
- Easy cleaning and maintenance
- Attractive stainless steel exterior
- Locking doors standard



Intertek

| HCD ICE BAGGING SYSTEM SERIES | Model Number | Exterior Finish | Application Ice Storage Capacity | Dimensions W x D x H | Shipping Weight | List F.O.B. Griffin |
|--|------------------|-----------------|-------------------------------------|----------------------|--------------------|------------------------|
| | HCD-500B | Stainless Steel | 647 Lbs. | 30" x 36" x 71" | 510 Lbs. | \$18,800 |
| | HCD-1000B | Stainless Steel | 1078 Lbs. | 48" x 36" x 71" | 590 Lbs. | \$24,000 |
| 48" heavy duty ice paddle included | | | | | | |





TOP KIT MATRIX

| | 22" Width | 22" Width | 30" Width | 30" Width | 44" Width | 44" Width | 48" Width | 60" Width |
|---|---|---|---|---|--|---|--|---|
| | KM-350M KM-515/520M KM-650/660M F-450M F-801M F-1001M F-1002M | KMD-410M† KMS-822M† FD-650M-C† FD-1002M-C† FS-1022M-C | KM-901M KM-1100M KM-1340M KM-1601M KML Series F-1501M F-2001M | KMD-460M‡ KMD-530M‡ KMD-860M‡ KMS-1402M KMS-2000M | 2 KM-350M 2 KM-515/520M 2 KM-650/660M IM-500S 2 F-450M 2 F-801M 2 F-1001M 2 F-1002M | 2 KMD-410M 2 KMS-822M 2 FD-650M-C 2 FD-1002M-C | KM-1301S KM-1601S KM-1900S KM-2100S KM-2600S | 2 KM-901M** 2 KM-1100M 2 KM-1340M 2 KM-1601M 2 KML Series 2 F-1501M 2 F-2001M 2 KMD-860M |
| 22" Width B-300PF/SF DB-130H | NO TOP KIT NEEDED <i>(DB-130H-KM Only)</i> | HS-5424 <i>(DB-130H-KMD Only)</i> | N/A | N/A | N/A | N/A | N/A | N/A |
| 30" Width B-250PF B-500PF/SF | HS-2033 | HS-2033 & HS-2129 | NO TOP KIT NEEDED | HS-2129 | N/A | N/A | N/A | N/A |
| 44" Width B-700PF/SF | HS-2035 | HS-2035 & HS-2130 | HS-2034 | HS-2130 & HS-2034 | NO TOP KIT NEEDED | HS-2130 | N/A | N/A |
| 48" Width B-800PF/SF | HS-2035 & HS-2032 | HS-2035, HS-2032 & HS-2131 | HS-2034 & HS-2032 | HS-2131, HS-2034 & HS-2032 | HS-2032 | HS-2032 & HS-2131 | NO TOP KIT NEEDED | N/A |
| 48" Width B-1150SS B-1300SS | UNIVERSAL TOP KIT INCLUDED | N/A | UNIVERSAL TOP KIT INCLUDED | UNIVERSAL TOP KIT INCLUDED HS-2147 | HS-5397 <i>(IM-500 Only)</i> | N/A | UNIVERSAL TOP KIT INCLUDED | N/A |
| 52" Width B-900PF/SF | HS-2035 & HS-2033 | HS-2035 & HS-2033/2132 | HS-2035 | HS-2132 & HS-2035 | HS-2033 | HS-2033 & HS-2132 | HS-2032 | N/A |
| 60" Width B-1500SS B-1650SS | N/A | N/A | UNIVERSAL TOP KIT INCLUDED HS-2111 | N/A | UNIVERSAL TOP KIT INCLUDED <i>(HS-5397 for IM-500)</i> | N/A | UNIVERSAL TOP KIT INCLUDED | UNIVERSAL TOP KIT INCLUDED |
| 30" Width DB-200H DM-200B | HS-2036 <i>(KM Units Only)</i> | N/A | NO TOP KIT NEEDED <i>(KML Units Only)</i> | N/A | N/A | N/A | N/A | N/A |

†BD-300PF/SF: bin fits KMD-410M, KMS-822M, FD-650M-C, & FD-1002M-C without a top kit extension

‡BD-500PF/SF: bin fits KMD-460M, KMD-530M, & KMD-860M without a top kit extension

Any KMS[§] FD on bin need Top Kit Extension:

| Model Number | For Use With | List F.O.B. Griffin |
|--------------|--------------------|---------------------|
| HS-2129 | B-500 bins | \$262 |
| HS-2130 | B-700 bins | \$297 |
| HS-2131 | B-800 bins | \$360 |
| HS-2132 | B-900 bins | \$438 |
| HS-2147 | B-1150 & 1300 bins | \$232 |

§Excludes KMS-830MLH

BD Bin Applications - See Ice Storage Bins
KMH-2000/2100S - Kloppenbergs Bins Only


| Model Number | Description | List F.O.B. Griffin |
|--------------|--|---------------------|
| HS-2032 | 4" ABS Top Kit | \$197 |
| HS-2033 | 8" ABS Top Kit | \$207 |
| HS-2034 | 14" ABS Top Kit | \$219 |
| HS-2035 | 22" ABS Top Kit | \$232 |
| HS-2036* | (2) 4" ABS Top Kits for DB applications | \$197 |
| HS-2111 | 11.3" x 26.2" Stainless Cover/Separator | FREE |
| HS-2148 | 30" x 3.1" Stainless Cover | \$165 |
| HS-2160** | 2 KM-901M Stainless Cover/Separator | \$835 |
| HS-5397 | Top Kit for IM-500 on B-1150/1300/1500/1650 | \$200 |



REMOTE CONDENSER

AIR-COOLED REMOTE CONDENSERS - URC / SRC / SRK

An Ice Machine with a **Remote Air Condenser** provides quiet operation at the icemaker location, improves efficiency, and saves energy with cooler operation. Sturdy construction and weather-resistant cabinet finish provides long life operation. Remote condensers may be installed outdoors up to 55 feet from the icemaker. For installations exceeding 55 feet, contact a Factory Technical Service Representative at 800-233-1940.

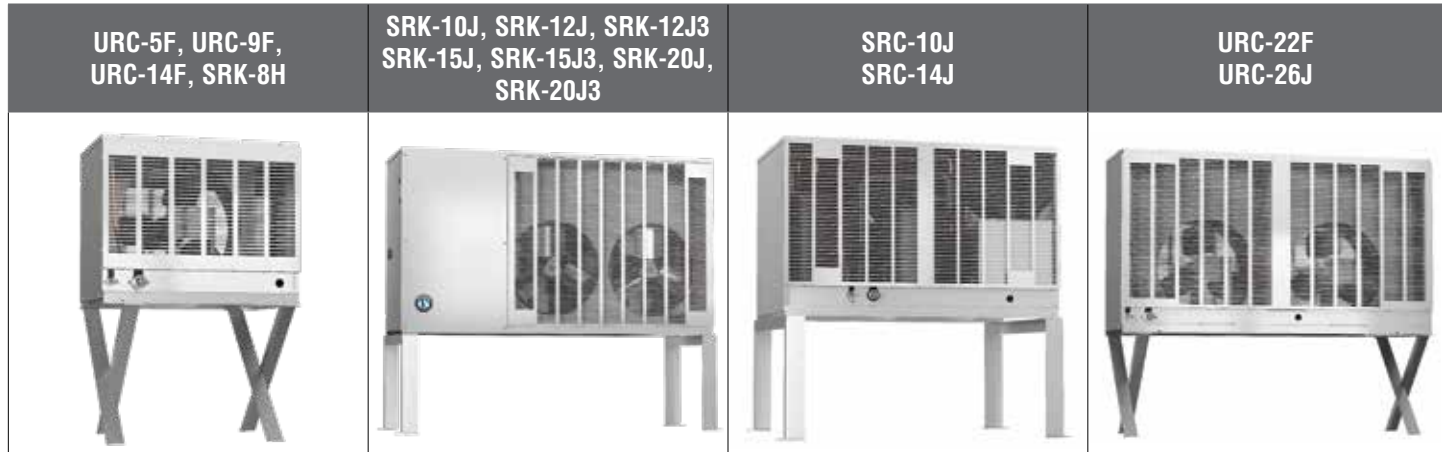

| Model Number | For Use With | Electrical | Dimensions W x D x H (Height includes legs) | Shipping Weight | List F.O.B. Griffin |
|--|--|------------|---|-----------------|---------------------|
| URC-5F | KM-520MRJ, KMD-530MRH, KM-660MRJ, FD-650MRH-C, FD-1002MRJ-C, F-1002MRJ(-C) | 115/60/1 | 21 ^{15/16} " x 14 ^{1/8} " x 32 ^{13/16} " | 60 Lbs. | \$1,550 |
| Accessories | | | | | |
| Tubing Kit: R404-2046-2 - 20' Pre-charged R-404A | | | | | \$400 |
| R404-3546-2 - 35' Pre-charged R-404A | | | | | \$505 |
| HS-2150 - Quick-Connect Kit (not required if line set is ordered) | | | | | \$207 |

| Model Number | For Use With | Electrical | Dimensions W x D x H (Height includes legs) | Shipping Weight | List F.O.B. Griffin |
|--|--------------|-------------|---|-----------------|---------------------|
| SRK-8H | KMS-830MLH | 230/60/1 ** | 35 ^{11/16} " x 25 ^{3/8} " x 37" | 206 Lbs. | \$3,040 |
| Accessories | | | | | |
| Tubing Kit: HS-0250 - 25' Brazing Required R-404A | | | | | \$395 |
| HS-0251 - 35' Brazing Required R-404A | | | | | \$505 |
| HS-0252 - 55' Brazing Required R-404A | | | | | \$635 |
| **3 wire with neutral for 115V For use with KMS-830MLH | | | | | |

| Model Number | For Use With | Electrical | Dimensions W x D x H (Height includes legs) | Shipping Weight | List F.O.B. Griffin |
|--|------------------------|------------|--|-----------------|---------------------|
| URC-9F | KML-700MRJ, KMD-860MRJ | 115/60/1 | 35 ^{11/16} " x 14 ^{1/16} " x 36 ^{1/2} " | 95 Lbs. | \$1,700 |
| Accessories | | | | | |
| Tubing Kit: R404-2068-2 - 20' Pre-charged R-404A | | | | | \$400 |
| R404-3568-2 - 35' Pre-charged R-404A | | | | | \$505 |
| R404-5568-2 - 55' Pre-charged R-404A | | | | | \$650 |
| HS-2150 - Quick-Connect Kit (not required if line set is ordered) | | | | | \$207 |

| Model Number | For Use With | Electrical | Dimensions W x D x H (Height includes legs) | Shipping Weight | List F.O.B. Griffin |
|--|----------------------------|------------|--|-----------------|---------------------|
| SRC-10J | FS-1001MLJ-C, FS-1022MLJ-C | 230/60/1 | 38" x 29" x 37" | 270 Lbs. | \$3,570 |
| Accessories | | | | | |
| Tubing Kit: HS-5299 - 25' Brazing Required R-404A | | | | | \$395 |
| HS-5300 - 35' Brazing Required R-404A | | | | | \$505 |
| HS-5301 - 55' Brazing Required R-404A | | | | | \$635 |



REMOTE CONDENSER

| Model Number | For Use With | Electrical | Dimensions W x D x H (Height includes legs) | Shipping Weight | List F.O.B. Griffin |
|--|--------------|------------|--|-----------------|---------------------|
| SRK-10J | KMS-822MLJ | 230/60/1** | 38" x 29" x 37" | 226 Lbs. | \$3,530 |
| Accessories | | | | | |
| Tubing Kit: HS-0250 - 25' Brazing Required R-404A | | | | | \$395 |
| HS-0251 - 35' Brazing Required R-404A | | | | | \$505 |
| HS-0252 - 55' Brazing Required R-404A | | | | | \$635 |
| **3 wire with neutral for 115V | | | | | |

| Model Number | For Use With | Electrical | Dimensions W x D x H (Height includes legs) | Shipping Weight | List F.O.B. Griffin |
|--|--------------|------------|--|-----------------|---------------------|
| SRK-12J | KMS-1122MLJ | 230/60/1** | 50" x 19 ^{1/2} " x 43" | 273 Lbs. | \$3,790 |
| SRK-12J3 | KMS-1122MLJ | 230/60/3 | 50" x 19 ^{1/2} " x 43" | 273 Lbs. | \$3,900 |
| Accessories | | | | | |
| Tubing Kit: HS-0250 - 25' Brazing Required R-404A | | | | | \$395 |
| HS-0251 - 35' Brazing Required R-404A | | | | | \$505 |
| HS-0252 - 55' Brazing Required R-404A | | | | | \$635 |
| **3 wire with neutral for 115V | | | | | |

| Model Number | For Use With | Electrical | Dimensions W x D x H (Height includes legs) | Shipping Weight | List F.O.B. Griffin |
|--|--------------|------------|---|-----------------|---------------------|
| SRC-14J | FS-1500MLJ-C | 230/60/1 | 37 ^{3/4} " x 26 ^{5/8} " x 37" | 235 Lbs. | 4,290 |
| Accessories | | | | | |
| Tubing Kit: HS-5323 - 25' Brazing Required R-404A | | | | | \$395 |
| HS-5324 - 35' Brazing Required R-404A | | | | | \$505 |
| HS-5325 - 55' Brazing Required R-404A | | | | | \$635 |
| **3 wire with neutral for 115V | | | | | |

| Model Number | For Use With | Electrical | Dimensions W x D x H (Height includes legs) | Shipping Weight | List F.O.B. Griffin |
|--|--------------|------------|--|-----------------|---------------------|
| SRK-15J | KMS-1402MLJ | 230/60/1** | 50" x 19 ^{1/2} " x 43" | 275 Lbs. | \$4,450 |
| SRK-15J3 | KMS-1402MLJ | 230/60/3 | 50" x 19 ^{1/2} " x 43" | 275 Lbs. | \$4,570 |
| Accessories | | | | | |
| Tubing Kit: HS-0250 - 25' Brazing Required R-404A | | | | | \$395 |
| HS-0251 - 35' Brazing Required R-404A | | | | | \$505 |
| HS-0252 - 55' Brazing Required R-404A | | | | | \$635 |
| **3 wire with neutral for 115V | | | | | |

| Model Number | For Use With | Electrical | Dimensions W x D x H (Height includes legs) | Shipping Weight | List F.O.B. Griffin |
|--|---|------------|--|-----------------|---------------------|
| URC-14F | KM-901MRJ(3), KM-1100MRJ, KM-1301SRJ(3), KM-1340MRJ(3), F-1501MRJ(-C) | 115/60/1 | 35 ^{11/16} " x 14 ^{1/16} " x 36 ^{1/2} " | 110 Lbs. | \$1,780 |
| Accessories | | | | | |
| Tubing Kit: R404-2068-2 - 20' Pre-charged R-404A | | | | | \$400 |
| R404-3568-2 - 35' Pre-charged R-404A | | | | | \$505 |
| R404-5568-2 - 55' Pre-charged R-404A | | | | | \$650 |
| HS-2150 - Quick-Connect Kit (not required if line set is ordered) | | | | | \$207 |
| HS-5102 - Hail Guard Kit | | | | | \$185 |



REMOTE CONDENSER

| Model Number | For Use With | Electrical | Dimensions W x D x H (Height includes legs) | Shipping Weight | List F.O.B. Griffin |
|--|----------------------------|------------------------|--|----------------------|----------------------------------|
| SRK-20J SRK-20J3 | KMS-2000MLJ KMS-2000MLJ | 230/60/1** 230/60/3 | 59 ^{9/16} " x 19 ^{1/2} " x 45" 59 ^{9/16} " x 19 ^{1/2} " x 45" | 325 Lbs. 325 Lbs. | \$9,030 \$9,150 |
| Accessories | | | | | |
| Tubing Kit: HS-0243 - 25' Brazing Required R-404A | | | | | \$395 |
| HS-0244 - 35' Brazing Required R-404A | | | | | \$505 |
| HS-0245 - 55' Brazing Required R-404A | | | | | \$680 |
| **3 wire with neutral for 115V | | | | | |

| Model Number | For Use With | Electrical | Dimensions W x D x H (Height includes legs) | Shipping Weight | List F.O.B. Griffin |
|--|---|------------|---|-----------------|---------------------|
| URC-22F | KM-1601MRJ(3), KM-1601SRJ(3), KM-1900SRJ(3), KM-2200SRJ3, KMH-2100SRJ(3), F-2001MRJ(-C) | 115/60/1 | 46 ^{3/8} " x 14 ^{1/8} " x 40 ^{1/2} " | 165 Lbs. | \$2,460 |
| URC-26J | KM-2600SRJ3 | 115/60/1 | 46 ^{3/8} " x 14 ^{1/8} " x 40 ^{1/2} " | 273 Lbs. | \$3,230 |
| Accessories | | | | | |
| Tubing Kit: R404-20610 - 20' Pre-charged R-404A | | | | | \$400 |
| R404-35610 - 35' Pre-charged R-404A | | | | | \$505 |
| R404-55610 - 55' Pre-charged R-404A | | | | | \$680 |
| HS-2150 - Quick-Connect Kit (not required if line set is ordered) | | | | | \$207 |
| HS-5095 - Hail Guard Kit | | | | | \$175 |

REMOTE CONDENSER MATRIX

| Remote Condenser | Ice Machines | Shipping Weight | Line Sets - PRE-CHARGED | | |
|------------------|---|-----------------|-------------------------|-------------|-------------|
| | | | 20' Length | 35' Length | 55' Length |
| URC-5F | KM-520MRJ, KMD-530MRH, KM-660MRJ, FD-650MRH-C, FD-1001MRJ-C, F-1001MRJ(-C), F-1002MRJ(-C) | 60 Lbs. | R404-2046-2 | R404-3546-2 | N/A |
| URC-9F | KML-700MRJ, KMD-860MRJ | 95 Lbs. | R404-2068-2 | R404-3568-2 | R404-5568-2 |
| URC-14F | KM-901MRJ(3), KM-1100MRJ, KM-1301SRJ(3), KM-1340MRJ(3), F-1501MRJ(-C) | 110 Lbs. | R404-2068-2 | R404-3568-2 | R404-5568-2 |
| URC-22F | KM-1601MRJ(3), KM-1601SRJ(3), KM-1900SRJ(3), KM-2200SRJ3, KMH-2100SRJ(3), F-2001MRJ(3)(-C) | 165 Lbs. | R404-20610 | R404-35610 | R404-55610 |
| URC-26J | KM-2600SRJ3 | 273 Lbs. | R404-20610 | R404-35610 | R404-55610 |

| Remote Condenser | Ice Machines | Shipping Weight | Line Sets - BRAZING REQUIRED | | |
|-----------------------------------|-----------------------------------|-----------------|------------------------------|------------|------------|
| | | | 25' Length | 35' Length | 55' Length |
| SRC-10J | FS-1001MLJ-C, FS-1022MLJ-C | 270 Lbs. | HS-5299* | HS-5300* | HS-5301* |
| SRK-8H | KMS-830MLH | 206 Lbs. | HS-0250* | HS-0251* | HS-0252* |
| SRK-10J | KMS-822MLJ | 226 Lbs. | HS-0250* | HS-0251* | HS-0252* |
| SRK-12J SRK-12J3 | KMS-1122MLJ | 275 Lbs. | HS-0250* | HS-0251* | HS-0252* |
| SRC-14J | FS-1500MLJ-C | 235 Lbs. | HS-5323* | HS-5324* | HS-5325* |
| SRK-15J SRK-15J3 | KMS-1402MLJ | 275 Lbs. | HS-0250* | HS-0251* | HS-0252* |
| SRK-20J SRK-20J3 | KMS-2000MLJ | 325 Lbs. | HS-0243* | HS-0244* | HS-0245* |

*Line sets require Refrigerant



WATER FILTRATION

| Model Number | Description | Undercounter KMs | KM Cubers | IM Cubers | Flakers / Cubelet | DCMs |
|--|--|--|--|------------------------|-------------------|------------|
| H9320-51 Use E-10 10" Prefilter | Single | AM-50, KM-80 KM-115, KM-160 KM-230, KM-300 | KM-350, 515/520 KML-325, 500, 700 KMD-410, 460, 530 KMS-830 DKM-500 | IM-200BAB IM-500SAA | All Models | All Models |
| H9320-52 Use E-20 20" Prefilter | Twin | N/A | KM-660, 901, 1100, 1340, 1601, 1601S, 1900S, 2100S, 2200S KMD-860 KMS-822, 1122, 1401 KMH-2100S | N/A | N/A | N/A |
| H9320-53 Use E-20 20" Prefilter | Triple | N/A | KM-1301S, 1340 KMS-2600S | N/A | N/A | N/A |
| H9655-11 | Replacement Cartridge (1) One each | | | | | |

Recommended water filter configurations based on average ice machine usage and regular filter replacement. If your operation has challenging water conditions or higher usage, then it may be necessary to use an additional filter or prefilter.

| Water Filters | Description | Height of System (Manifold + Cartridge) | List F.O.B. Griffin |
|-----------------|------------------------------|--|---------------------|
| H9320-51 | Single | 18.4" H | \$365 |
| H9320-52 | Twin | 19.11" H | \$625 |
| H9320-53 | Triple | 19.15" H | \$870 |
| H9655-11 | Replacement Cartridge each | | \$144 |
| H9655-06 | Replacement Cartridge (6 pk) | | \$700 |

| Prefilters | Description | Height of System (Manifold + Cartridge) | List F.O.B. Griffin |
|----------------|-------------------------------------|--|---------------------|
| 9534-26 | E-20 Replacement Cartridges (6 pk) | | \$166 |
| 9534-12 | E-10 Replacement Cartridges (12 pk) | | \$177 |
| 9534-20 | E-20 Replacement Cartridges (20 pk) | | \$365 |
| 9534-40 | E-10 Replacement Cartridges (40 pk) | | \$345 |
| 9795-80 | E-10 Prefilter (10") | | \$212 |
| 9795-90 | E-20 Prefilter (20") | | \$288 |



Triple Configuration Shown
(Single and Twin Configurations Available)



EcO₃Ice OZONE SYSTEM

| Model Number | Description Flow Rate (Gal. per min.) | Undercounter KMs | KM Cubers | IM Cubers | Flakers / Cubelet | DCMs |
|--------------|---|-----------------------------|---|------------------------|-------------------|------|
| HS-5282 | Low Flow (.34 GPM) | AM-50B KM-80B KM-160B | N/A | N/A | All Models | N/A |
| HS-5283 | Standard Flow (1.3 GPM) | KM-230B KM-300B | KM-350M KML-325M, 500M KMD-410M DKM-500B | IM-200BAB IM-500SAA | N/A | N/A |
| HS-5284 | Fast Flow (4.2 GPM) | N/A | KM 515/520M, 660M, 901M, 1301S, 1340M, 1601M, 1601S, 1900S, 2200S, 2600S KMD 460M, 530M, 860M, 901M KML-700M KMS 822M, 830M, 1122M, 1401M, 2000M KMH-2100S | N/A | N/A | N/A |
| HS-5285 | Replacement Cartridge (1) One each | | | | | |

| Model Number | Description | Overall Dimensions Model W x D x H | List F.O.B. Griffin |
|--------------|----------------------------|---------------------------------------|---------------------|
| HS-5282 | Low Flow (.34 GPM) | 3.8" x 3.6" x 8.0" | \$800 |
| HS-5283 | Standard Flow (1.3 GPM) | 3.8" x 3.6" x 8.0" | \$800 |
| HS-5284 | Fast Flow (4.2 GPM) | 5.98" x 3.6" x 9.28" | \$800 |
| HS-5285 | Replacement Cartridge each | | \$400 |

The compact EcO₃Ice ozone device uses a unique, synthetic diamond-based technology that continuously treats incoming water used by ice machines, killing bacteria, yeast and mold in the ice-making path from beginning to end. Reduces biofilm build-up, greatly extending required time between cleanings. With each cycle, EcO₃Ice creates a small, safe but effective amount of pure ozone - nature's own sanitizer - which continuously treats the machine interior, storage bin, dispenser and drains.



HS-5282 - EcO₃Ice Low Flow Ozone System
HS-5283 - EcO₃Ice Standard Flow Ozone System



HS-5284
EcO₃Ice Fast Flow Ozone System



HS-5285
EcO₃Ice Ozone System
Replacement Cartridge





SUSHI CASES

Features & Benefits of HOSHIZAKI Sushi Cases

- NEW Energy efficient LED lights with on/off switch
- Elegant curved front glass design enhances product on display
- Condenser airflow comes in the back and out the side
- Large diameter 1" drain at front, vinyl hose included
- NSF approved thermometer
- Easy to clean ceiling
- Plate space on top of unit, 5.6 inches
- Larger front to back interior, 11 inches
- Interior floor has a radius at all four sides
- Self-contained refrigeration unit - easy to install
- Large diameter upper evaporator with tin plating
- Slightly taller doors with plastic seal at end, opposite of the handle
- Solid food plates with radius groove to fit sushi foods



| Model Number | Condenser | Refrigeration Unit Location (Front View) | Dimensions W x D x H | Shipping Dimensions W x D x H | Electrical | Shipping Weight | List F.O.B. Griffin |
|-----------------------|------------|--|--|--|------------|-----------------|---------------------|
| HNC-120BA-R-SL | Air-Cooled | Right Side | 47 ^{1/4"} x 13 ^{5/8"} x 11 | 51 ^{1/4"} x 16 ^{7/8"} x 20 ^{3/8"} | 115V/60/1 | 104 Lbs. | \$4,610 |
| HNC-120BA-L-SL | Air-Cooled | Left Side | 47 ^{1/4"} x 13 ^{5/8"} x 11 | 51 ^{1/4"} x 16 ^{7/8"} x 20 ^{3/8"} | 115V/60/1 | 104 Lbs. | \$4,610 |
| HNC-150BA-R-SL | Air-Cooled | Right Side | 59 ^{1/16"} x 13 ^{5/8"} x 11 | 63" x 16 ^{7/8"} x 20 ^{3/8"} | 115V/60/1 | 126 Lbs. | \$4,980 |
| HNC-150BA-L-SL | Air-Cooled | Left Side | 59 ^{1/16"} x 13 ^{5/8"} x 11 | 63" x 16 ^{7/8"} x 20 ^{3/8"} | 115V/60/1 | 126 Lbs. | \$4,980 |
| HNC-180BA-R-SL | Air-Cooled | Right Side | 70 ^{7/8"} x 13 ^{5/8"} x 11 | 74 ^{13/16"} x 16 ^{7/8"} x 20 ^{3/8"} | 115V/60/1 | 139 Lbs. | \$5,570 |
| HNC-180BA-L-SL | Air-Cooled | Left Side | 70 ^{7/8"} x 13 ^{5/8"} x 11 | 74 ^{13/16"} x 16 ^{7/8"} x 20 ^{3/8"} | 115V/60/1 | 139 Lbs. | \$5,570 |
| HNC-210BA-R-SL | Air-Cooled | Right Side | 82 ^{11/16"} x 13 ^{5/8"} x 11 | 86 ^{5/8"} x 16 ^{7/8"} x 20 ^{3/8"} | 115V/60/1 | 157 Lbs. | \$6,160 |
| HNC-210BA-L-SL | Air-Cooled | Left Side | 82 ^{11/16"} x 13 ^{5/8"} x 11 | 86 ^{5/8"} x 16 ^{7/8"} x 20 ^{3/8"} | 115V/60/1 | 157 Lbs. | \$6,160 |


"R" - Condensing Unit is on RIGHT from front view

"L" - Condensing Unit is on LEFT from front view

Not intended for overnight storage. NSF Standard 7




HNC-120BA-L-SL

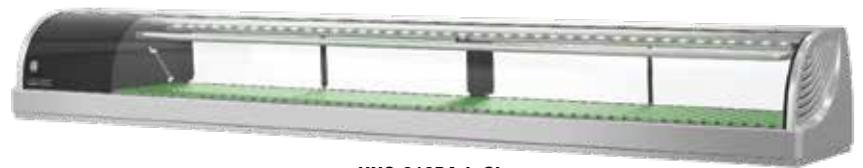

HNC-210BA-L-SL



HNC-150BA-L-SL



HNC-180BA-L-SL



STEELHEART



HOSHIZAKI'S Steelheart Series is a commercial line engineered for durability, performance and efficiency. As anyone that runs a commercial kitchen knows, only the strong survive. Just like our legendary ice makers, we've designed our new refrigeration series to survive conditions that would send lesser equipment to the scrap yard. Without compromising performance, Hoshizaki seeks natural solutions such as sustainable materials and hydrocarbon refrigerants for a clean and healthy environment. Combined with Hoshizaki's unique ducted airflow technology, food products remain fresh, nutritious, and safe as a result of uniform temperatures and quick recovery.

- All Stainless construction - inside and out.
- Durable and easy to clean.
- Designed to be reliable.
- Fewer parts and non-critical features means less service calls.
- Top mount refrigeration is easier to clean and creates more interior and exterior storage space.
- Uprights accommodate full-size tray pans and roll through standard entryways with casters.
- Uses environmentally friendly R290 hydrocarbon refrigerant
- Endlessly configurable to meet workflow needs
- Maintains NSF safe temperatures in 100° environments.
- Air circulates evenly, even when over-stuffed. Zero hot spots.

REFRIGERATION MODEL NUMBER IDENTIFICATION CODE



HORIZONTAL REFRIGERATION | MODEL NUMBER IDENTIFICATION CODE

S R 48 A - 12MD2

Series Identification

- U Undercounter
- W Worktop
- S Sandwich Prep/Mega Top
- P Pizza Prep
- C Chef Base

Model Identification

- R Refrigerator
- F Freezer

Unit Width

In Inches

Series Modification

- A Alphabetically increases per model revisions

Options Configuration

- LP / -D Low Profile / Drawers
- # / -#D# Number of 1/2-Sized Pan Capacity / Number of 1/2-Sized Pan Capacity with Number of Drawers in Sandwich Prep
- #M / -#MD# Number of 1/2-Sized Pan Capacity / Number of 1/2-Sized Pan Capacity with Number of Drawers in Mega Top
- 01 Unit with Cylinder Lock

SR48A-18MD2

Mega Top Prep Table,
Refrigerator,
48" Wide,

*Revision A**

(18) 1/2-Sized Pan Capacity in Rail,
Door and 2 Drawers

* The series modification letter can be generally ignored when talking about the unit, this letter is only important if you are getting Tech Support or ordering service parts.

UPRIGHT REFRIGERATION | MODEL NUMBER IDENTIFICATION CODE

R 1 A - FS

Model Identification

- R Refrigerator
- F Freezer

Number of Sections

1 / 2 / 3 One, Two, or Three Sections

Series Modification

- A Alphabetically increases per model revisions

Door Configuration

- FS / -HS Full Height or Half Height Stainless Door
- FG / -HG Full Height or Half Height Glass Door
- FSL / -HSL Full Height or Half Height Stainless Door, Left Hand Hinge

R1A-FS

Upright Refrigerator,
One Section,

*Revision A**

Full Stainless Door

* The series modification letter can be generally ignored when talking about the unit, this letter is only important if you are getting Tech Support or ordering service parts.



WARRANTY

EFFECTIVE: January 1, 2019

Supersedes all previous price lists

TERMS and CONDITIONS

Prices are F.O.B. Factory. All prices and specifications are subject to change without notice. HOSHIZAKI reserves the right to determine point of shipment.

TERMS:

Terms are such as the Company may extend to the purchaser.

LOST OR DAMAGED SHIPMENTS:

Whenever seller shall deliver or cause to be delivered to a common carrier any goods ordered by consignee, whether the particular common carrier shall have been designated in the shipping instructions of the consignee or not, seller shall not be responsible for any delays or damage in shipment and the common carrier to which seller shall deliver goods shipped to the consignee is hereby declared to the agent of the consignee. Therefore it is the responsibility of the consignee to file claim with the carrier for lost or damaged shipments.

WARRANTY

All units to be free from manufacturing defects, covered by:

Commercial Series Refrigerators & Freezers

- 3-Year - Parts & Labor on entire machine.
- 5-Year - Parts on Compressor.

Compact Undercounter Refrigerator - HR24B

- 3-Year - Parts & Labor on entire machine.

Back Bar Refrigerators & Glass Door Merchandisers

- 3-Year - Parts & Labor on entire machine.
- 5-Year - Parts on Compressor.

Warranty

Warranty valid in United States, Canada, Puerto Rico, & U.S. Territories only. Contact Factory for Warranty in other Countries. Refer to manufacturer's full warranty for complete details. Suggested List Prices are intended only as a guide. This does not restrict the price seller may establish due to market conditions.

AGENCY LISTINGS and MARKS





UPRIGHT REFRIGERATORS



R1A-FS(L)
ENERGY STAR
Qualified

R1A-HS(L)
ENERGY STAR
Qualified

R2A-FS
ENERGY STAR
Qualified

R2A-HS
ENERGY STAR
Qualified

CR3S-FS

CR3S-HS

- Stainless steel interior and exterior front, sides and top
- Unique ducted air distribution system, achieves uniform cabinet temperatures even when full
- Energy efficient thermostatic expansion valve
- Self-closing stainless steel doors with spring assist hinges, stay open feature and locks
- 4" Heavy duty stem casters standard



| Model Number | R1A-FS(L) | R1A-HS(L) | R2A-FS | R2A-HS | CR3S-FS | CR3S-HS |
|--|-----------------------|-----------------------|-----------------------|-----------------------|--|--|
| Interior Storage Capacity (AHAM) | 23.10 ft ³ | 23.10 ft ³ | 50.37 ft ³ | 50.37 ft ³ | (L) 47.2 ft ³ (R) 20.9 ft ³ | (L) 47.0 ft ³ (R) 20.8 ft ³ |
| Overall Dimensions (W x D x H including 4" casters) | 27.5" x 33.5" x 79.5" | 27.5" x 33.5" x 79.5" | 55" x 33.5" x 79.5" | 55" x 33.5" x 79.5" | 83" x 34" x 79.5" | 83" x 34" x 79.5" |
| Depth with doors open at 90° | 59.25" | 59.25" | 59.25" | 59.75" | 59.75" | 59.75" |
| Interior Door opening width | 21.75" | 21.75" | 21.75" | 21.75" | 22" | 22" |
| Interior Door opening height | 59.25" | 59.25" | 59.25" | 79.5" | 59.25" | 27.75" |
| Adjustable Shelves | 3 | 3 | 6 | 6 | 6 (L) / 3 (R) | 6 (L) / 3 (R) |
| Shelf Dimensions (W x D) | 21.25" x 26" | 21.25" x 26" | 21.25" x 26" | 21.25" x 26" | (L) 24" x 24.75" (R) 21.25" x 26" | (L) 24" x 24.75" (R) 21.25" x 26" |
| Crated Shipping Weight | 345 lbs. | 345 lbs. | 562 lbs. | 562 lbs. | 895 lbs. | 895 lbs. |
| Crated Shipping Dimensions (L x W x H) | 37.5" x 31.5" x 81" | 37.5" x 31.5" x 81" | 58" x 37.5" x 81" | 58" x 37.5" x 81" | 86" x 36.5" x 83" | 86" x 36.5" x 83" |
| Voltage | 115V/60/1 | 115V/60/1 | 115V/60/1 | 115V/60/1 | 115V/60/1 | 115V/60/1 |
| Amperage (AMP) | 4.3 | 4.3 | 7.1 | 7.1 | 12 | 12 |
| HACR Breaker (AMP) | 15 | 15 | 15 | 15 | 20 | 20 |
| *Energy Consumption (kWh / day) ENERGY STAR / DOE | 1.25 | 1.25 | 3.47 | 2.48 | 4.03 | 3.77 |
| *Heat Rejection (BTU / hr) | 317 | 317 | 513 | 513 | 595 (L) / 367 (R) | 595 (L) / 367 (R) |
| Voltage Range | 104 - 126 | 104 - 126 | 104 - 126 | 104 - 126 | 104 - 126 | 104 - 126 |
| Ambient Temp. Range | 45° - 100°F | 45° - 100°F | 45° - 100°F | 45° - 100°F | 45° - 100°F | 45° - 100°F |
| Control Set Point Range | 33° - 52°F | 33° - 52°F | 31° - 52°F | 31° - 52°F | 33° - 52°F | 33° - 52°F |
| Refrigerant | R290 | R290 | R290 | R290 | R-134a | R-134a |
| List F.O.B. Griffin | \$5,980 | \$7,140 | \$7,960 | \$9,670 | \$14,340 | \$16,390 |

*Based on 100°F ambient cycling at set point

- See Refrigeration Accessories on pages 76-79 for options and prices



UPRIGHT REFRIGERATORS



R1A-FG



R1A-HG



CR2S-FG



CR3S-FG

- Stainless steel interior and exterior front, sides and top
- Energy efficient thermostatic expansion valve/self contained refrigeration system
- Unique ducted air distribution system, achieves a uniform cabinet temperatures even when full
- Glass doors are energy efficient multi pane, argon filled with locks
- FG models come with energy efficient vertical LED lights
- 4" Heavy duty stem casters standard



| Model Number | R1A-FG | R1A-HG | CR2S-FG | CR3S-FG |
|---|-----------------------|-----------------------|----------------------|---|
| Interior Storage Capacity (AHAM) | 23.10 ft ³ | 20.9 ft ³ | 47.2 ft ³ | 68.1 ft ³ Total; 47.2 ft ³ (L) / 20.9 ft ³ (R) |
| Overall Dimensions (W x D x H including 4" casters) | 27.5" x 34.5" x 79.5" | 27.5" x 34.5" x 79.5" | 55" x 34.75" x 79.5" | 83" x 34.75" x 79.5" |
| Depth with doors open at 90° | 57" | 57" | 57.25" | 57.25" |
| Interior Door opening width | 21.75" | 21.75" | 22" | 22" |
| Interior Door opening height | 59.25" | 59.25" | 59.5" | 59.5" |
| Adjustable Shelves | 3 | 3 | 6 | 9 Total; 6 (L) / 3 (R) |
| Shelf Dimensions (W x D) | 21.25" x 26" | 21.25" x 26" | 24" x 24.75" | (L) 24" x 24.75" (R) 21.25" x 26" |
| Crated Shipping Weight | 350 lbs. | 345 lbs. | 540 lbs. | 895 lbs. |
| Crated Shipping Dimensions (L x W x H) | 37.5" x 31.5" x 81" | 37.5" x 31.5" x 81" | 58" x 36.5" x 83" | 86" x 37.5" x 83" |
| Voltage | 115V/60/1 | 115V/60/1 | 115V/60/1 | 115V/60/1 |
| Amperage (AMP) | 4.7 | 4.7 | 7 | 12 |
| HACR Breaker (AMP) | 15 | 15 | 15 | 20 |
| *Energy Consumption (kWh / day) ENERGY STAR / DOE | 2.47 | 2.56 | 4.85 | 4.85 (L) / 2.56 (R) |
| *Heat Rejection (BTU / hr) | 639 | 639 | 928 | 928 (L) / 570 (R) |
| Voltage Range | 104 - 126 | 104 - 126 | 104 - 126 | 104 - 126 |
| Ambient Temp. Range | 45° - 100°F | 45° - 100°F | 45° - 100°F | 45° - 100°F |
| Control Set Point Range | 31° - 52°F | 31° - 52°F | 31° - 52°F | 31° - 52°F |
| Refrigerant | R290 | R290 | R-134a | R-134a |
| List F.O.B. Griffin | \$7,430 | \$8,925 | \$10,200 | \$20,330 |

*Based on 100°F ambient cycling at set point
See Refrigeration Accessories on pages 76-79 for options and prices



UPRIGHT FREEZERS



- Stainless steel interior and exterior front, sides and top
- 4" Heavy duty stem casters standard
- Unique ducted air distribution system, achieves a uniform cabinet temperatures even when full
- Energy efficient thermostatic expansion valve
- Self-closing stainless steel doors with spring assist hinges, stay open feature and locks



| Model Number | F1A-FS(L) | CF1S-HS(L) | F2A-FS | F2A-HS | CF3S-FS | CF3S-HS |
|---|-----------------------|----------------------|-----------------------|----------------------|--------------------------------------|--------------------------------------|
| Interior Storage Capacity (AHAM) | 23.1 ft ³ | 20.8 ft ³ | 50.37 ft ³ | 47.0 ft ³ | 68.1 ft ³ | 67.8 ft ³ |
| Overall Dimensions (W x D x H including 4" casters) | 27.5" x 33.5" x 79.5" | 27.5" x 34" x 79.5" | 55" x 33.5" x 79.5" | 55" x 34" x 79.5" | 83" x 34" x 79.5" | 83" x 34" x 79.5" |
| Depth with doors open at 90° | 59.25" | 59.75" | 59.25" | 59.75" | 59.75" | 59.75" |
| Interior Door opening width | 21.75" | 22" | 21.75" | 21.75" | 22" | 22" |
| Interior Door opening height | 59.25" | 27.75" | 59.25" | 27.75" | 59.25" | 27.75" |
| Adjustable Shelves | 3 | 3 | 6 | 6 | 6 (L) / 3 (R) | 6 (L) / 3 (R) |
| Shelf Dimensions (W x D) | 21.25" x 26" | 21.25" x 26" | 21.25"x26" | 21.25" x 26" | (L) 24" x 24.75" (R) 21.25" x 26" | (L) 24" x 24.75" (R) 21.25" x 26" |
| Crated Shipping Weight | 345 lbs. | 360 lbs. | 562 lbs. | 562 lbs. | 905 lbs. | 905 lbs. |
| Crated Shipping Dimensions (L x W x H) | 31.5" x 37.5" x 81" | 31.5" x 37.5" x 83" | 58" x 36.5" x 83" | 58" x 37.5" x 81" | 86" x 36.5" x 83" | 86" x 36.5" x 83" |
| Voltage | 115V/60/1 | 115V/60/1 | 115V/60/1 | 115V/60/1 | 230/115V/60/1 | 230/115V/60/1 |
| Amperage (AMP) | 8.46 | 9.0 | 8.7 | 8.7 | 9.5 | 9.5 |
| HACR Breaker (AMP) | 15 | 15 | 15 | 15 | 20 | 20 |
| *Energy Consumption (kWh / day) ENERGY STAR / DOE | 6.25 | 5.48 | 12.16 | 12.16 | 15.94 | 15 |
| *Heat Rejection (BTU / hr) | 1178 | 1704 | 1820 | 1820 | 2148 (L) / 1589 (R) | 2148 (L) / 1589 (R) |
| Voltage Range | 104 - 126 | 104 - 126 | 104 - 126 | 104 - 126 | 104 - 126 | 104 - 126 |
| Ambient Temp. Range | 45° - 100°F | 45° - 100°F | 45° - 100°F | 45° - 100°F | 45° - 100°F | 45° - 100°F |
| Control Set Point Range | -10° - +12°F | -10° - +12°F | -10° - +12°F | -10° - +12°F | -10° - +12°F | -10° - +12°F |
| Refrigerant | R290 | R-404A | R290 | R290 | R-404A | R-404A |
| List F.O.B. Griffin | \$7,470 | \$8,500 | \$10,480 | \$11,960 | \$16,070 | \$17,830 |

*Based on 100°F ambient cycling at set point
See Refrigeration Accessories on pages 76-79 for options and prices



UPRIGHT FREEZERS



F1A-FG



CF2S-FG

- Stainless steel interior and exterior front, sides and top
- Energy efficient thermostatic expansion valve
- Unique ducted air distribution system, achieves a uniform cabinet temperatures even when full

- Glass doors are energy efficient multi pane, argon filled with locks
- FG models come with energy efficient vertical LED lights
- 4" Heavy duty stem casters standard



| Model Number | F1A-FG | CF2S-FG |
|---|-----------------------|----------------------|
| Nominal Storage Capacity | 23.3 ft ³ | 51.0 ft ³ |
| Interior Storage Capacity (AHAM) | 23.10 ft ³ | 47.2 ft ³ |
| Overall Dimensions (W x D x H including 4" casters) | 27.5" x 34.5" x 79.5" | 55" x 34.75" x 79.5" |
| Depth with doors open at 90° | 57" | 57.25" |
| Interior Door opening width | 21.75" | 22" |
| Interior Door opening height | 59.25 | 59.5" |
| Adjustable Shelves | 3 | 6 |
| Shelf Dimensions (W x D) | 21.25" x 26" | 24" x 24.75" |
| Crated Shipping Weight | 365 lbs. | 545 lbs. |
| Crated Shipping Dimensions (L x W x H) | 31.5" x 37.5" x 81" | 58" x 37.5" x 83" |
| Voltage | 115V/60/1 | 115V/60/1 |
| Amperage (AMP) | 8.5 | 11 |
| HACR Breaker (AMP) | 15 | 15 |
| *Energy Consumption (kWh / day) ENERGY STAR / DOE | 7.73 | 14.21 |
| *Heat Rejection (BTU / hr) | 806 | 2122.5 |
| Voltage Range | 104 - 126 | 104 - 126 |
| Ambient Temp. Range | 45° - 100°F | 45° - 80°F |
| Control Set Point Range | -10° - +12°F | -10° - +12°F |
| Refrigerant | R290 | R-404A |
| List F.O.B. Griffin | \$11,000 | \$15,550 |

*Based on 100°F ambient cycling at set point
See Refrigeration Accessories on pages 76-79 for options and prices

COMPACT UNDERCOUNTER REFRIGERATOR



HR24B
ENERGY STAR
Qualified

- Stainless steel exterior
- UL approval for outdoor use
- ADA Compliant
- Energy efficient, one piece ABS interior liner
- Door is stainless steel exterior, aluminum interior and is field reversible
- Ducted air flow for even air distribution throughout cabinet
- Built-in cabinet installation with louvered trim

| | |
|---|--------------------------------------|
| Model Number | HR24B |
| Interior Storage Capacity (AHAM) | 4.0 ft ³ |
| Overall Dimensions (W x D x H including legs) | 23.4" x 24.5" x 31.5" |
| Depth with doors open at 90° | 51.5" |
| Interior Door opening width | 18.1" |
| Adjustable Shelves | 3 |
| Shelf Dimensions (W x D) | (1) 19.13" x 17" (2) 19.13" x 12" |
| Crated Shipping Weight | 115 lbs |
| Crated Shipping Dimensions (L x W x H) | 24" x 26" x 36.6" |
| Voltage | 115V/60/1 |
| Amperage (AMP) | 1.15 |
| HACR Breaker (AMP) | 15 |
| Energy Consumption (kWh / day) ENERGY STAR / DOE | 0.51 |
| Voltage Range | 104 - 127 |
| Ambient Temp. Range | 60° - 95°F |
| Control Set Point Range | 34° - 52°F |
| Refrigerant | R600a |
| List F. O. B. Griffin | \$2,850 |

ACCESSORIES:

HS-5057 - Tempered Glass Shelves, 3 pack

\$200





UNDERCOUNTER REFRIGERATORS



UR27A(-01)
ENERGY STAR
Qualified



UR27A-LP
ENERGY STAR
Qualified



UR36A(-01)
ENERGY STAR
Qualified



UR48A(-01)
ENERGY STAR
Qualified



UR60A(-01)
ENERGY STAR
Qualified



UR72A(-01)
ENERGY STAR
Qualified

- Stainless steel interior and exterior front, sides and top
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Field reversible doors
- Cabinet and doors are insulated with 2" foamed in place polyurethane
- 4" Stem casters standard (2.25" casters - LP model)
- Electronic controls

| Model Number | UR27A UR27A-01** (01 Cylinder Door Lock) | UR27A-LP Low Profile unit meets ADA requirements | UR36A UR36A-01** (01 Cylinder Door Lock) | UR48A UR48A-01** (01 Cylinder Door Lock) | UR60A UR60A-01** (01 Cylinder Door Lock) | UR72A UR72A-01** (01 Cylinder Door Lock) |
|--|--|---|--|--|--|--|
| Nominal Storage Capacity | 7.21 ft ³ | 7.2 ft ³ | 9.9 ft ³ | 13.66 ft ³ | 17.55 ft ³ | 21.25 ft ³ |
| Interior Storage Capacity (AHAM) | 6.22 ft ³ | 6.22 ft ³ | 8.7 ft ³ | 12 ft ³ | 15.38 ft ³ | 18.63 ft ³ |
| Overall Dimensions (W x D x H including 4" casters) | 27" x 30" x 33.63" | 27" x 30" x 32.25" | 36" x 30" x 33.63" | 48" x 30" x 33.63" | 60" x 31" x 33.63" | 72" x 30" x 33.63" |
| Depth with doors open at 90° | 55.5" | 55.5" | 58.5" | 52.5" | 57.5" | 51.5" |
| Interior Door opening width | N/A | 22.75" | 25.5" | 19.5" | 25.5" | 19.5" |
| Interior Door opening height | 22.6" | 22.9" | 23" | 23" | 23" | 23" |
| Adjustable Shelves | 1 | 1 | 1 | 2 | 2 | 3 |
| Shelf Dimensions (W x D) | 27"x16" | 22" x 16" | 31" x 16" | 21.5" x 16" | 27.25" x 16" | 22" x 16" |
| Crated Shipping Weight | 156 lbs. | 156 lbs. | 157 lbs. | 222 lbs. | 272 lbs. | 317 lbs. |
| Crated Shipping Dimensions (L x W x H) | 31.5" x 34" x 36.5" | 31.5" x 34" x 36.5" | 40.5" x 34" x 36.5" | 52.5" x 34" x 36.5" | 62.5" x 34" x 36.5" | 74" x 34" x 40.5" |
| Voltage | 115V/60/1 | 115V/60/1 | 115V/60/1 | 115V/60/1 | 115V/60/1 | 115V/60/1 |
| Amperage (AMP) | 2.5 | 2.5 | 2.4 | 2.6 | 3.1 | 3.0 |
| HACR Breaker (AMP) | 15 | 15 | 15 | 15 | 15 | 15 |
| Energy Consumption (kWh / day) ENERGY STAR / DOE | 2.5 | .63 | .54 | 0.8 | 0.89 | 1.3 |
| Heat Rejection (BTU / hr) | 190 | 190 | 222 | 215 | 291 | 263.5 |
| Voltage Range | 104 - 126 | 104 - 126 | 104 - 126 | 104 - 126 | 104 - 126 | 104 - 126 |
| Ambient Temp. Range | 45° - 100°F | 45° - 100°F | 45° - 100°F | 45° - 100°F | 45° - 100°F | 45° - 100°F |
| Temperature Range | 32° - 52°F | 32° - 52°F | 32° - 52°F | 32° - 52°F | 32° - 52°F | 32° - 52°F |
| Refrigerant | R290 | R290 | R290 | R290 | R290 | R290 |
| List F.O.B. Griffin | \$3,580 **\$3,830 | \$3,580 | \$4,900 **\$5,150 | \$5,380 **\$5,880 | \$5,970 **\$6,470 | \$6,840 **\$7,590 |

**SPECIAL ORDER - Please contact your local HOSHIZAKI Sales Representative for availability.
See Refrigeration Accessories on pages 76-79 for options and prices



UNDERCOUNTER GLASS DOOR REFRIGERATORS & FREEZER

STEELHEART



UR27A-GLP01
ENERGY STAR
Qualified



UR48A-GLP01
ENERGY STAR
Qualified



UF27A-GLP01
ENERGY STAR
Qualified

- Stainless steel interior and exterior front, sides and top
- Standard 2.25" casters (2 with brakes)
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Field reversible glass doors
- Energy efficient LED interior lights with on/off switch
- Meets ADA requirements
- Glass doors with locks are energy efficient multi pane, argon filled

| Model Number | UR27A-GLP01 | UR48A-GLP01 | UF27A-GLP01 |
|---|----------------------|-----------------------|----------------------|
| Nominal Storage Capacity | 7.21 ft ³ | 13.66 ft ³ | 7.21 ft ³ |
| Interior Storage Capacity (AHAM) | 6.22 ft ³ | 12 ft ³ | 6.22 ft ³ |
| Overall Dimensions W x D x H including 2.25" casters) | 27" x 32.5" x 31.9" | 48" x 31.5" x 31.9" | 27" x 31" x 31.9" |
| Depth with doors open at 90° | 55.5" | 52" | 55.5" |
| Interior Door opening width | 22.6" | 19.5" | 22.6" |
| Interior Door opening height | 23" | 23" | 23" |
| Adjustable Shelves | 1 | 1 | 1 |
| Shelf Dimensions (W x D) | 22" x 16" | 21.38" x 16" | 22" x 16" |
| Crated Shipping Weight | 179 lbs. | 265 lbs. | 156 lbs. |
| Crated Shipping Dimensions (L x W x H) | 29.25" x 36" x 35.5" | 52.5" x 36" x 35.5" | 36" x 31.5" x 35.5" |
| Voltage | 115V/60/1 | 115V/60/1 | 115V/60/1 |
| Amperage (AMP) | 2.9 | 2.6 | 2.5 |
| HACR Breaker (AMP) | 15 | 15 | 15 |
| Energy Consumption (kWh / day) ENERGY STAR / DOE | .86 | 1.15 | 3.66 |
| Heat Rejection (BTU / hr) | 463 | 465 | 463 |
| Voltage Range | 104 - 126 | 104 - 126 | 104 - 126 |
| Ambient Temp. Range | 45° - 100°F | 45° - 100°F | 45° - 100°F |
| Temperature Range | 32° - 52°F | 32° - 52°F | -10° - 10°F |
| Refrigerant | R290 | R290 | R290 |
| List F. O. B. Griffin | \$5,320 | \$7,780 | \$5,700 |

Made to order: Please contact your local Hoshizaki Sales Representative for availability. See Refrigeration Accessories on pages 76-79 for options and prices



UNDERCOUNTER FREEZERS



UF27A(-01)
ENERGY STAR
Qualified



UF27A-LP



UF48A(-01)



UF60A(-01)

- Stainless steel interior and exterior front, sides and top
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Field reversible doors
- Cabinet and doors are insulated with 2" foamed in place polyurethane
- 4" Stem casters standard (2.25" casters - LP model)
- Electronic controls

| Model Number | UF27A UF27A-01** (01 Cylinder Door Lock) | UF27A-LP Low Profile unit meets ADA requirements | UF48A UF48A-01** (01 Cylinder Door Lock) | UF60A UF60A-01** (01 Cylinder Door Lock) |
|--|--|---|--|--|
| Nominal Storage Capacity | 7.2 ft ³ | 7.2 ft ³ | 13.66 ft ³ | 17.55 ft ³ |
| Interior Storage Capacity (AHAM) | 6.22 ft ³ | 6.22 ft ³ | 11.95 ft ³ | 15.38 ft ³ |
| Overall Dimensions (W x D x H including 4" casters) | 27" x 30" x 33.63" | 27" x 30" x 32.25" | 48" x 30" x 33.63" | 60" x 30" x 33.63" |
| Depth with doors open at 90° | 54.5" | 55.5" | 52.5" | 58.5" |
| Interior Door opening width | 22.75" | 22.75" | 19.5" | 25.5" |
| Interior Door opening height | 23" | 23" | 23" | 23" |
| Adjustable Shelves | 1 | 1 | 2 | 2 |
| Shelf Dimensions (W x D) | 22" x 16" | 22" x 16" | 21.5" x 16" | 27.25" x 16" |
| Crated Shipping Weight | 156 lbs. | 156 lbs. | 222 lbs. | 268 lbs. |
| Crated Shipping Dimensions (L x W x H) | 31.5" x 34" x 36.5" | 31.5" x 34" x 36.5" | 52.5" x 34" x 36.5" | 62" x 34" x 36.5" |
| Voltage | 115V/60/1 | 115V/60/1 | 115V/60/1 | 115V/60/1 |
| Amperage (AMP) | 2.5 | 2.3 | 5.9 | 5.6 |
| HACR Breaker (AMP) | 15 | 15 | 15 | 15 |
| Energy Consumption (kWh / day) ENERGY STAR / DOE | 2.08 | 2.49 | 3.64 | 4.22 |
| Heat Rejection (BTU / hr) | 463 | 492 | 656 | 804.2 |
| Voltage Range | 104 - 126 | 104 - 126 | 104 - 126 | 104 - 126 |
| Ambient Temp. Range | 45° - 100°F | 45° - 100°F | 45° - 100°F | 45° - 100°F |
| Temperature Range | -10° - +10°F | -10° - +10°F | -10° - +10°F | -10° - +10°F |
| Refrigerant | R290 | R290 | R290 | R290 |
| List F.O.B. Griffin | \$4,190 **\$4,580 | \$4,310 | \$6,240 **\$6,780 | \$7,750 **\$8,200 |

****SPECIAL ORDER - Please contact your local HOSHIZAKI Sales Representative for availability.**
See Refrigeration Accessories on pages 76-79 for options and prices



UNDERCOUNTER REFRIGERATORS with DRAWERS



UR27A-D2
ENERGY STAR
Qualified



UR48A-D4
ENERGY STAR
Qualified



UR60A-D4
ENERGY STAR
Qualified



UR72A-D6
ENERGY STAR
Qualified

- Stainless steel interior and exterior front, sides and top
- Cabinet and drawers are insulated with 2" foamed in place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Heavy duty drawers with removeable gaskets
- 4" Stem casters standard
- Electronic controls

| Model Number | UR27A-D2 | UR48A-D4 | UR60A-D4 | UR72A-D6 |
|--|--|--|--|--|
| Nominal Storage Capacity | 7.21 ft ³ | 13.66 ft ³ | 17.55 ft ³ | 21.25 ft ³ |
| Interior Storage Capacity (AHAM) | 6.22 ft ³ | 12 ft ³ | 15.38 ft ³ | 18.63 ft ³ |
| Overall Dimensions (W x D x H including 4" casters) | 27" x 30" x 33.63" | 48" x 30" x 33.63" | 60" x 30" x 33.63" | 72" x 30" x 33.63" |
| Depth with Drawer Fully Open | 51" | 52" | 52" | 52" |
| Drawer opening width | 22.6" | 19.5" | 25.5" | 19.5" |
| Drawer opening height | 22.9" | 22.9" | 22.9" | 23" |
| Drawer Pan Capacity (pans by others) | (1) 12" x 20" x 6" deep pan per drawer | (1) 1/2 and (1) 1/3 size pan per drawer, 6" deep | (1) 12" x 20" x 6" deep pan per drawer | (1) 1/2 and (1) 1/3 size pan per drawer, 6" deep |
| Pan Capacity (# of 1/6 size x 4" deep) | N/A | N/A | N/A | N/A |
| Crated Shipping Weight | 176 lbs. | 262 lbs. | 308 lbs. | 372 lbs. |
| Crated Shipping Dimensions (L x W x H) | 31.5" x 34" x 36.5" | 52.5" x 34" x 36.5" | 62" x 34" x 36.5" | 74" x 34" x 36.5" |
| Voltage | 115V/60/1 | 115V/60/1 | 115V/60/1 | 115V/60/1 |
| Amperage (AMP) | 2.5 | 2.6 | 3.3 | 3.5 |
| HACR Breaker (AMP) | 15 | 15 | 15 | 15 |
| Energy Consumption (kWh / day) ENERGY STAR / DOE / NSF | 1.34 | 1.4 | 2.6 | 2.8 |
| Heat Rejection (BTU / hr) | 190 | 203 | 370 | 398 |
| Voltage Range | 104 - 126 | 104 - 126 | 104 - 126 | 104 - 126 |
| Ambient Temp. Range | 45° - 100°F | 45° - 100°F | 45° - 100°F | 45° - 100°F |
| Temperature Range | 32° - 52°F | 32° - 52°F | 32° - 52°F | 32° - 52°F |
| Refrigerant | R290 | R290 | R290 | R290 |
| List F.O.B. Griffin | \$5,710 | \$9,500 | \$10,640 | \$13,830 |

See Refrigeration Accessories on pages 76-79 for options and prices



UNDERCOUNTER FREEZERS WITH DRAWERS



UF27A-D2



UF48A-D4

- Stainless steel interior and exterior front, sides and top
- Cabinet and drawers are insulated with 2" foamed in place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Heavy duty drawers with removeable gaskets
- 4" Stem casters standard
- Electronic controls

| Model Number | UF27A-D2 | UF48A-D4 |
|--|--|--|
| Nominal Storage Capacity | 7.21 ft ³ | 13.66 ft ³ |
| Interior Storage Capacity (AHAM) | 6.22 ft ³ | 12 ft ³ |
| Overall Dimensions (W x D x H including 4" casters) | 27" x 30" x 33.63" | 48" x 30" x 33.63" |
| Depth with Drawer Fully Open | 52" | 52" |
| Drawer Pan Capacity (pans by others) | (1) 12" x 20" x 6" deep pan per drawer | (1) 1/2 size and (1) 1/3 Size, 6" deep |
| Crated Shipping Weight | 176 lbs. | 262 lbs. |
| Crated Shipping Dimensions (L x W x H) | 34" x 31.5" x 36.5" | 52.5" x 34" x 36.5" |
| Voltage | 115V/60/1 | 115V/60/1 |
| Amperage (AMP) | 2.5 | 5.9 |
| HACR Breaker (AMP) | 15 | 15 |
| Energy Consumption (kWh / day) ENERGY STAR / DOE / NSF | 4.41 | 5.9 |
| Heat Rejection (BTU / hr) | 627 | 864 |
| Voltage Range | 104 - 126 | 104 - 126 |
| Ambient Temp. Range | 45° - 100°F | 45° - 100°F |
| Temperature Range | -10° - +10°F | -10° - +10°F |
| Refrigerant | R290 | R290 |
| List F.O.B. Griffin | \$6,780 | \$10,340 |

See Refrigeration Accessories on pages 76-79 for options and prices



WORKTOP REFRIGERATORS



WR27A(-01)
ENERGY STAR
Qualified



WR36A(-01)
ENERGY STAR
Qualified



WR48A(-01)
ENERGY STAR
Qualified



WR60A(-01)



WR72A(-01)
ENERGY STAR
Qualified

- Stainless steel interior and exterior front, sides and top
- Cabinet and doors are insulated with 2" foamed in place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Field reversible doors
- Electronic controls
- 6" Stem casters standard

| Model Number | WR27A WR27A-01** (01 Cylinder Door Lock) | WR36A WR36A-01** (01 Cylinder Door Lock) | WR48A WR48A-01** (01 Cylinder Door Lock) | WR60A WR60A-01** (01 Cylinder Door Lock) | WR72A WR72A-01** (01 Cylinder Door Lock) |
|--|--|--|--|--|--|
| Nominal Storage Capacity | 7.21 ft ³ | 9.9 ft ³ | 13.66 ft ³ | 17.55 ft ³ | 21.25 ft ³ |
| Interior Storage Capacity (AHAM) | 6.22 ft ³ | 8.7 ft ³ | 12 ft ³ | 15.38 ft ³ | 18.63 ft ³ |
| Overall Dimensions (W x D x H including 6" casters) | 27" x 30" x 40" | 36" x 30" x 40" | 48" x 30" x 40" | 60" x 30" x 40" | 72" x 30" x 40" |
| Depth with doors open at 90° | 55.5" | 58.5" | 52.5" | 58.5" | 51.5" |
| Interior Door opening width | 22.6" | 25.5" | 19.5" | 25.5" | 19.5" |
| Interior Door opening height | 23" | 23" | 23" | 23" | 23" |
| Adjustable Shelves | 1 | 1 | 2 | 2 | 3 |
| Shelf Dimensions (W x D) | 22" x 16" | 31" x 16" | 21.38" x 16" | 27.25" x 16" | 22" x 16" |
| Crated Shipping Weight | 156 lbs. | 187 lbs. | 223 lbs. | 272 lbs. | 317 lbs. |
| Crated Shipping Dimensions (L x W x H) | 31.5" x 34" x 40.5" | 40.5" x 34" x 40.5" | 52.5" x 34" x 40.5" | 62.5" x 34" x 40.5" | 74.5" x 34" x 40.75" |
| Voltage | 115V/60/1 | 115V/60/1 | 115V/60/1 | 115V/60/1 | 115V/60/1 |
| Amperage (AMP) | 2.5 | 2.4 | 2.6 | 3.1 | 4.2 |
| HACR Breaker (AMP) | 15 | 15 | 15 | 15 | 15 |
| Energy Consumption (kWh / day) ENERGY STAR / DOE | .63 | .54 | .80 | .89 | 1.3 |
| Heat Rejection (BTU / hr) | 190 | 222 | 215 | 291 | 263.5 |
| Voltage Range | 104 - 126 | 104 - 126 | 104 - 126 | 104 - 126 | 104 - 126 |
| Ambient Temp. Range | 45° - 100°F | 45° - 100°F | 45° - 100°F | 45° - 100°F | 45° - 100°F |
| Temperature Range | 32° - 52°F | 32° - 52°F | 32° - 52°F | 32° - 52°F | 32° - 52°F |
| Refrigerant | R290 | R290 | R290 | R290 | R290 |
| List F.O.B. Griffin | \$3,750 **\$4,000 | \$5,170 **\$5,420 | \$5,630 **\$6,130 | \$6,250 **\$6,750 | \$7,170 **\$7,920 |

****SPECIAL ORDER - Please contact your local HOSHIZAKI Sales Representative for availability.**
See Refrigeration Accessories on pages 76-79 for options and prices



WORKTOP FREEZERS



WF27A(-01)
ENERGY STAR
Qualified



WF48A(-01)



WF60A(-01)

- Stainless steel interior and exterior front, sides and top
- Cabinet and doors are insulated with 2" foamed in place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Field reversible doors
- Electronic controls
- 6" Stem casters standard

| Model Number | WF27A WF27A-01** (01 Cylinder Door Lock) | WF48A WF48A-01** (01 Cylinder Door Lock) | WF60A WF60A-01** (01 Cylinder Door Lock) |
|--|--|--|--|
| Nominal Storage Capacity | 7.2 ft ³ | 13.66 ft ³ | 17.55 ft ³ |
| Interior Storage Capacity (AHAM) | 6.2 ft ³ | 12 ft ³ | 15.38 ft ³ |
| Overall Dimensions (W x D x H including 6" casters) | 27" x 30" x 40" | 48" x 30" x 40" | 60" x 30" x 40" |
| Depth with doors open at 90° | 55.5" | 52.5" | 58.5" |
| Interior Door opening width | 22.75" | 19.5" | 25.5" |
| Interior Door opening height | 23" | 23" | 23" |
| Adjustable Shelves | 1 | 2 | 2 |
| Shelf Dimensions (W x D) | 22" x 16.0" | 21.3" x 16" | 27.25" x 16" |
| Crated Shipping Weight | 156 lbs. | 223 lbs. | 272 lbs. |
| Crated Shipping Dimensions (L x W x H) | 31.5" x 34" x 40.5" | 52.5" x 34" x 40.5" | 62" x 34" x 40.5" |
| Voltage | 115V/60/1 | 115V/60/1 | 115V/60/1 |
| Amperage (AMP) | 2.5 | 5.9 | 5.6 |
| HACR Breaker (AMP) | 15 | 15 | 15 |
| Energy Consumption (kWh / day) ENERGY STAR / DOE | 2.08 | 3.64 | 4.22 |
| Heat Rejection (BTU / hr) | 463 | 656 | 804.2 |
| Voltage Range | 104 - 126 | 104 - 126 | 104 - 126 |
| Ambient Temp. Range | 45° - 100°F | 45° - 100°F | 45° - 100°F |
| Temperature Range | -10° - +10°F | -10° - +10°F | -10° - +10°F |
| Refrigerant | R290 | R290 | R290 |
| List F.O.B. Griffin | \$4,400 **\$4,620 | \$6,520 **\$6,980 | \$8,070 **\$8,520 |

**SPECIAL ORDER - Please contact your local HOSHIZAKI Sales Representative for availability.
See Refrigeration Accessories on pages 76-79 for options and prices



WORKTOP REFRIGERATORS with DRAWERS

STEELHEART



WR27A-D2
ENERGY STAR
Qualified



WR48A-D4
ENERGY STAR
Qualified



WR60A-D4
ENERGY STAR
Qualified



WR72A-D6
ENERGY STAR
Qualified

- Stainless steel interior and exterior front, sides and top
- Cabinet and drawers are insulated with 2" foamed in place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Heavy duty drawers with removeable gaskets
- 6" Stem casters standard
- Electronic controls

| Model Number | WR27A-D2 | WR48A-D4 | WR60A-D4 | WR72A-D6 |
|---|--|--|--|--|
| Nominal Storage Capacity | 7.21ft ³ | 13.66 ft ³ | 17.55 ft ³ | 21.25 ft ³ |
| Interior Storage Capacity (AHAM) | 6.22 ft ³ | 12 ft ³ | 15.38 ft ³ | 18.63 ft ³ |
| Overall Dimensions (W x D x H including 6" casters) | 27" x 30" x 40" | 48" x 30" x 40" | 60" x 30" x 40" | 72" x 30" x 40" |
| Depth with Drawer Fully Open | 51" | 52" | 52" | 52" |
| Drawer opening width | 22" | 19.5" | 25.5" | 19.5" |
| Drawer opening height | 23" | 22.9" | 22.9" | 23" |
| Drawer Pan Capacity (pans by others) | (1) 12" x 20" x 6" deep pan per drawer | (1) 1/2 and (1) 1/3 size pan per drawer, 6" deep | (1) 12" x 20" x 6" deep pan per drawer | (1) 1/2 and (1) 1/3 size pan per drawer, 6" deep |
| Pan Capacity (# of 1/6 size x 4" deep) | N/A | N/A | N/A | N/A |
| Crated Shipping Weight | 176 lbs. | 263 lbs. | 312 lbs. | 377 lbs. |
| Crated Shipping Dimensions (L x W x H) | 31.5" x 34" x 40.5" | 52.5" x 34" x 40.5" | 62.5" x 34" x 40.5" | 74" x 34" x 40.5" |
| Voltage | 115V/60/1 | 115V/60/1 | 115V/60/1 | 115V/60/1 |
| Amperage (AMP) | 2.6 | 2.6 | 3.3 | 3.5 |
| HACR Breaker (AMP) | 15 | 15 | 15 | 15 |
| Energy Consumption (kWh / day) ENERGY STAR / DOE / NSF | 1.34 | 2.6 | 2.6 | 2.8 |
| Heat Rejection (BTU / hr) | 190 | 203 | 370 | 398 |
| Voltage Range | 104 - 126 | 104 - 126 | 104 - 126 | 104 - 126 |
| Ambient Temp. Range | 45° - 100°F | 45° - 100°F | 45° - 100°F | 45° - 100°F |
| Temperature Range | 32° - 52°F | 32° - 52°F | 32° - 52°F | 32° - 52°F |
| Refrigerant | R290 | R290 | R290 | R290 |
| List F.O.B. Griffin | \$5,830 | \$9,660 | \$10,860 | \$14,310 |

****SPECIAL ORDER - Please contact your local HOSHIZAKI Sales Representative for availability.**
See Refrigeration Accessories on pages 76-79 for options and prices





STEELHEART

WORKTOP FREEZER with DRAWERS



WF27A-D2



WF48A-D4

- Stainless steel interior and exterior front, sides and top
- Cabinet and drawers are insulated with 2" foamed in place polyurethane
- 6" Stem casters standard
- Heavy duty drawers with removeable gaskets
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Electronic controls

| Model Number | WF27A-D2 | WF48A-D4 |
|---|--|--|
| Nominal Storage Capacity | 7.21 ft ³ | 13.66 ft ³ |
| Interior Storage Capacity (AHAM) | 6.22 ft ³ | 12 ft ³ |
| Overall Dimensions (W x D x H including 6" casters) | 27" x 30" x 40" | 48" x 30" x 40" |
| Depth with Drawer Fully Open | 52" | 52" |
| Drawer Pan Capacity (pans by others) | (1) 12" x 20" x 6" deep pan per drawer | (1) 1/2 Size and (1) 1/3 Size, 6" deep |
| Crated Shipping Weight | 176 lbs. | 263 lbs. |
| Crated Shipping Dimensions (L x W x H) | 34" x 31.5" x 40.5" | 52.5" x 34" x 40.5" |
| Voltage | 115V/60/1 | 115V/60/1 |
| Amperage (AMP) | 2.5 | 5.9 |
| HACR Breaker (AMP) | 15 | 15 |
| Energy Consumption (kWh / day) ENERGY STAR / DOE | 4.41 | 6.08 |
| Heat Rejection (BTU / hr) | 627 | 864 |
| Voltage Range | 104 - 126 | 104 - 126 |
| Ambient Temp. Range | 45° - 100°F | 45° - 100°F |
| Temperature Range | -10° - +10°F | -10° - +10°F |
| Refrigerant | R290 | R290 |
| List F.O.B. Griffin | \$7,080 | \$10,660 |

See Refrigeration Accessories on pages 76-79 for options and prices

DRAWER / DOOR COMBINATIONS



- Stainless steel interior and exterior front sides and top
- Door/Drawer configuration can be located in any cabinet section
- Engineered to maintain NSF-7 temperatures in 100°F ambient.
- Cabinet and drawers are insulated with 2" foamed in place polyurethane
- Enamel coated evaporator coil
- Field reversible doors

| Model Number | UR48A-D2 | UR60A-D2 | WR48A-D2 | WR60A-D2 |
|--|--|--|---|---|
| Nominal Storage Capacity | 13.66 ft ³ | 17.55 ft ³ | 13.66 ft ³ | 17.55 ft ³ |
| Interior Storage Capacity (AHAM) | 12 ft ³ | 15.38 ft ³ | 12 ft ³ | 15.38 ft ³ |
| Overall Dimensions (L x W x H) | 48" x 30" x 33.63" (including 4" casters) | 60" x 30" x 33.63" (including 4" casters) | 48" x 30" x 40" (including 4" casters) | 60" x 30" x 40" (including 4" casters) |
| Depth with Door Open at 90° | 51.5" | 58.5" | 51.5" | 58.5" |
| Depth with drawer fully open | 52" | 52" | 52" | 52" |
| Door opening width | 19.5" | 25.5" | 19.5" | 25.5" |
| Door opening height | 23" | 23" | 23" | 23" |
| Adjustable Shelves / Shelf Dimensions (WxD) | (1) 21.38" x 16" | (1) 27.25" x 16" | (1) 21.38" x 16" | (1) 27.25" x 16" |
| Drawer Pan Capacity (pans by others) | (1) 1/2 and (1) 1/3 size pans, 6" deep | (1) full size pan, 6" deep | (1) 1/2 and (1) 1/3 size pans, 6" deep | (1) full size pan, 6" deep |
| Crated Shipping Weight | 241 lbs. | 288 lbs. | 241 lbs. | 288 lbs. |
| Crated Shipping Dimensions (L x W x H) | 52.5" x 34" x 36.5" | 62.5" x 34" x 36.5" | 52.5" x 34" x 40.5" | 62.5" x 34" x 40.5" |
| Voltage | 115V/60/1 | 115V/60/1 | 115V/60/1 | 115V/60/1 |
| Amperage (AMP) | 2.6 | 3.3 | 2.6 | 3.3 |
| HACR Breaker (AMP) | 15 | 15 | 15 | 15 |
| Energy Consumption (kWh / day) ENERGY STAR / DOE | 1.4 | 2.6 | 1.4 | 2.6 |
| Heat Rejection (BTU / hr) | 203 | 370 | 203 | 370 |
| Voltage Range | 104 - 126 | 104 - 126 | 104 - 126 | 104 - 126 |
| Ambient Temp. Range | 45° -100°F | 45° -100°F | 45° -100°F | 45° -100°F |
| Temperature Range | 32° - 52°F | 32° - 52°F | 32° - 52°F | 32° - 52°F |
| Refrigerant | R290 | R290 | R290 | R290 |
| List F.O.B. Griffin | \$7,530 | \$8,150 | \$7,730 | \$8,370 |

Made to order: Allow 4-6 week lead time. Door and drawer configuration is customizable. See Refrigeration Accessories on pages 76-79 for options and prices

Please check with your distributor for availability.





PREP TABLES - SALAD / SANDWICH TOP REFRIGERATORS



SR27A-8



SR36A-10



SR48A-8



SR48A-12

- Stainless steel interior and exterior front, sides and top
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- Engineered to maintain NSF-7 temperatures in 100°F ambient.
- Cabinet and doors are insulated with 2" foamed in place polyurethane
- 1/2" x 10" Cutting board standard
- Field reversible doors

| Model Number | SR27A-8 | SR36A-10 | SR48A-8 | SR48A-12 |
|---|----------------------|---------------------|-----------------------|-----------------------|
| Nominal Storage Capacity | 7.21 ft ³ | 9.9 ft ³ | 13.66 ft ³ | 13.66 ft ³ |
| Interior Storage Capacity (AHAM) | 6.22 ft ³ | 8.7 ft ³ | 11.95 ft ³ | 11.95 ft ³ |
| Overall Dimensions (W x D x H including 6" casters) | 27" x 30" x 44.25" | 36" x 30" x 44.25" | 48" x 30" x 44.25" | 48" x 30" x 44.25" |
| Depth with Cutting Board installed | 30.7" | 30.7" | 30.7" | 30.7" |
| Depth with doors open at 90° | 55.5" | 56.5" | 51.5" | 51.5" |
| Interior Door opening width | 22.6" | 25.5" | 19.5" | 19.5" |
| Interior Door opening height | 23" | 23" | 23" | 22.9" |
| Adjustable Shelves | 1 | 1 | 2 | 2 |
| Shelf Dimensions (W x D) | 22" x 16" | 31" x 16" | 21.3" x 16" | 21.25" x 16" |
| Pan Capacity (# of 1/6 size x 4" deep) | 8 | 10 | 8 | 8/12 |
| Crated Shipping Weight | 185 lbs. | 225 lbs. | 222 lbs. | 225 lbs. |
| Crated Shipping Dimensions (L x W x H) | 32" x 31.5" x 46.5" | 40.5" x 32" x 46.5" | 52.5" x 32" x 45.75" | 52.5" x 32" x 45.75" |
| Voltage | 115V/60/1 | 115V/60/1 | 115V/60/1 | 115V/60/1 |
| Amperage (AMP) | 2.4 | 2.7 | 2.5 | 2.6 |
| HACR Breaker (AMP) | 15 | 15 | 15 | 15 |
| Energy Consumption (kWh / day) ENERGY STAR / DOE | 1.9 | 2.6 | 4 | 4 |
| Heat Rejection (BTU / hr) | 270 | 364.1 | 567 | 567 |
| Voltage Range | 104 - 126 | 104 - 126 | 104 - 126 | 104 - 126 |
| Ambient Temp. Range | 45° - 100°F | 45° - 100°F | 45° - 100°F | 45° - 100°F |
| Temperature Range | 32° - 52°F | 32° - 52°F | 32° - 52°F | 32° - 52°F |
| Refrigerant | R290 | R290 | R290 | R290 |
| List F.O.B. Griffin | \$4,110 | \$5,830 | \$5,750 | \$6,470 |

See Refrigeration Accessories on pages 76-79 for options and prices



PREP TABLES - SALAD / SANDWICH TOP REFRIGERATORS



- Stainless steel interior and exterior front, sides and top
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- Engineered to maintain NSF-7 temperatures in 100°F ambient.
- Cabinet and doors are insulated with 2" foamed in place polyurethane
- 1/2" x 10" Cutting board standard
- Field reversible doors

| Model Number | SR60A-8 | SR60A-12 | SR60A-16 | SR72A-12 | SR72A-16 | SR72A-18 |
|---|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Nominal Storage Capacity | 17.55 ft ³ | 17.55 ft ³ | 17.55 ft ³ | 21.25 ft ³ | 21.25 ft ³ | 21.25 ft ³ |
| Interior Storage Capacity (AHAM) | 15.38 ft ³ | 15.38 ft ³ | 15.38 ft ³ | 18.63 ft ³ | 18.63 ft ³ | 19.7 ft ³ |
| Overall Dimensions (W x D x H including 6" casters) | 60" x 30" x 44.25" | 60" x 30" x 44.25" | 60" x 30" x 44.25" | 72" x 30" x 44.25" | 72" x 30" x 44.25" | 72" x 30" x 44.25" |
| Depth with Cutting Board installed | 30.7" | 30.7" | 30.7" | 30.7" | 30.7" | 30.7" |
| Depth with doors open at 90° | 58.5" | 58.5" | 58.5" | 51.5" | 52.5" | 52.5" |
| Interior Door opening width | 25.5" | 25.5" | 25.5" | 19.5" | 19.5" | 19.5" |
| Interior Door opening height | 23" | 23" | 23" | 23" | 23" | 23" |
| Adjustable Shelves | 2 | 2 | 2 | 3 | 2 | 2 |
| Shelf Dimensions (W x D) | 27.25" x 16" | 27.25" x 16" | 27.25" x 16" | 22" x 16" | 22" x 16" | 22" x 16" |
| Pan Capacity (# of 1/6 size x 4" deep) | 8 | 2 | 8 | 12 | 16 | 18 |
| Crated Shipping Weight | 323 lbs. | 323 lbs. | 323 lbs. | 432 lbs. | 432 lbs. | 432 lbs. |
| Crated Shipping Dimensions (L x W x H) | 62.5" x 32" x 46.5" | 64.5" x 32" x 46.5" | 62.5" x 32" x 46.5" | 74" x 32" x 46.5" | 74" x 32" x 46.5" | 74" x 32" x 46.5" |
| Voltage | 115V/60/1 | 115V/60/1 | 115V/60/1 | 115V/60/1 | 115V/60/1 | 115V/60/1 |
| Amperage (AMP) | 6 | 6 | 6 | 6.2 | 6.3 | 6.3 |
| HACR Breaker (AMP) | 15 | 15 | 15 | 15 | 15 | 15 |
| Energy Consumption (kWh / day) ENERGY STAR / DOE | 4.3 | 4.3 | 4.3 | 6.2 | 6.2 | 6.2 |
| Heat Rejection (BTU / hr) | 613 | 613 | 613 | 911 | 876 | 876 |
| Voltage Range | 104 - 126 | 104 - 126 | 104 - 126 | 104 - 126 | 104 - 126 | 104 - 126 |
| Ambient Temp. Range | 45° - 100°F | 45° - 100°F | 45° - 100°F | 45° - 100°F | 45° - 100°F | 45° - 100°F |
| Temperature Range | 32° - 52°F | 32° - 52°F | 32° - 52°F | 32° - 52°F | 32° - 52°F | 32° - 52°F |
| Refrigerant | R290 | R290 | R290 | R290 | R290 | R290 |
| List F. O. B. Griffin | \$7,020 | \$7,130 | \$6,750 | \$8,250 | \$8,330 | \$7,940 |

See Refrigeration Accessories on pages 76-79 for options and prices



PREP TABLES - SALAD / SANDWICH TOP REFRIGERATORS with DRAWERS



SR27A-8D2



SR48A-12D4



SR48A-12D2**

- Stainless steel interior and exterior front, sides and top
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- Engineered to maintain NSF-7 temperatures in 100°F ambient.

- Cabinet and drawers are insulated with 2" foamed in place polyurethane
- 1/2" x 10" Cutting board standard
- 6" Stem casters standard

| Model Number | SR27A-8D2 | SR48A-12D4 | SR48A-12D2 |
|---|------------------------|--|---------------------------------------|
| Nominal Storage Capacity | 7.21 ft ³ | 13.66 ft ³ | 13.66 ft ³ |
| Interior Storage Capacity (AHAM) | 6.22 ft ³ | 11.95 ft ³ | 11.95 ft ³ |
| Overall Dimensions (W x D x H including 6" casters) | 27" x 30" x 44.25" | 48" x 30" x 44.25" | 48" x 30" x 44.25" |
| Depth with Cutting Board installed | 30.7" | 30.7" | 30.7" |
| Depth with Door Open at 90° | N/A | N/A | 52.5" |
| Depth with drawer fully open | 52" | 52" | 50.25" |
| Door/Drawer opening width | 19.5" | 19.5" | 19.5" |
| Door opening height | N/A | N/A | 23" |
| Adjustable Shelves / Shelf Dimensions (WxD) | N/A | N/A | (1) 21.25" x 16" |
| Drawer Pan Capacity (pans by others) | 8 | (1) 1/2 and (1) 1/3 size pan per drawer, 6" deep | (1) 1/2 and (1) 1/3 size pans 6" deep |
| Pan Capacity (# of 1/6 size x 4" deep) | 12 (6" max. pan depth) | 12 (6" max. pan depth) | 12 (6" max. pan depth) |
| Crated Shipping Weight | 205 lbs | 262 lbs. | 262 lbs. |
| Crated Shipping Dimensions (L x W x H) | 31.5"x 32" x 46.5" | 52.5" x 32" x 45.75" | 52.5" x 32" x 45.75" |
| Voltage | 115V/60/1 | 115V/60/1 | 115V/60/1 |
| Amperage (AMP) | 2.4 | 2.5 | 2.5 |
| HACR Breaker (AMP) | 15 | 15 | 15 |
| Energy Consumption (kWh / day) ENERGY STAR / DOE | 1.9 | 3.2 | 3.2 |
| Heat Rejection (BTU / hr) | 270 | 452.3 | 452.3 |
| Voltage Range | 104 - 126 | 104 - 126 | 104 - 126 |
| Ambient Temp. Range | 45° - 100°F | 45° - 100°F | 45° - 100°F |
| Temperature Range | 32° - 52°F | 32° - 52°F | 32° - 52°F |
| Refrigerant | R290 | R290 | R290 |
| List F.O.B. Griffin | \$6,570 | \$10,510 | \$8,910 |

**Made to order: Allow 4-6 week lead time. Door and drawer configuration is customizable. See Refrigeration Accessories on pages 76-79 for options and prices



PREP TABLES - MEGA TOP REFRIGERATORS



SR27A-12M



SR48A-12M



SR36A-15M



SR48A-18M

- Stainless steel interior and exterior front, sides and top
- Provided with full complement of polycarbonate plastic 1/6th size pans
- Engineered to maintain NSF-7 temperatures in 100°F ambient.
- Cabinet and doors insulated with 2" foamed in place polyurethane
- 1/2" x 10" Cutting board with extended top for greater stability
- 6" Stem casters standard

| Model Number | SR27A-12M | SR48A-12M | SR36A-15M | SR48A-18M |
|---|----------------------|-----------------------|----------------------|-----------------------|
| Nominal Storage Capacity | 7.2 ft ³ | 13.66 ft ³ | 9.9 ft ³ | 13.66 ft ³ |
| Interior Storage Capacity (AHAM) | 6.22 ft ³ | 11.95 ft ³ | 8.7 ft ³ | 11.95 ft ³ |
| Overall Dimensions (W x D x H including 6" casters) | 27" x 34" x 44.25" | 48" x 34" x 44.25" | 36" x 37.5" x 44.25" | 48" x 37.5" x 44.25" |
| Depth with Cutting Board installed | 37.3" | 37.3" | N/A | N/A |
| Depth with doors open at 90° | 52.5" | 52.5" | 57.5" | 51.75" |
| Interior Door opening width | 22" | 19.5" | 25.5" | 19.5" |
| Interior Door opening height | 44.25" | 23" | 23" | 23" |
| Adjustable Shelves | 1 | 2 | 1 | 2 |
| Shelf Dimensions (W x D) | 22" x 16" | 21.25" x 16" | N/A | N/A |
| Pan Capacity (# of 1/6 size x 4" deep) | 12 | 12 | 15 | 18 |
| Crated Shipping Weight | 185 lbs. | 225 lbs. | 225 lbs. | 225 lbs. |
| Crated Shipping Dimensions (L x W x H) | 36" x 31.5" x 46.5" | 52.5" x 42" x 45.75" | 40.5" x 36" x 46.5" | 52.5" x 42" x 45.75" |
| Voltage | 115V/60/1 | 115V/60/1 | 115V/60/1 | 115V/60/1 |
| Amperage (AMP) | 2.4 | 2.5 | 2.7 | 2.5 |
| HACR Breaker (AMP) | 15 | 15 | 15 | 15 |
| Energy Consumption (kWh / day) ENERGY STAR / DOE | 1.9 | 3.2 | 2.6 | 3.2 |
| Heat Rejection (BTU / hr) | 270 | 452.3 | 364.1 | 452.3 |
| Voltage Range | 104 - 126 | 104 - 126 | 104 - 126 | 104 - 126 |
| Ambient Temp. Range | 45° - 100°F | 45° - 100°F | 30° - 52°F | 45° - 100°F |
| Temperature Range | 32° - 52°F | 32° - 52°F | 32° - 52°F | 32° - 52°F |
| Refrigerant | R290 | R290 | R290 | R290 |
| List F.O.B. Griffin | \$4,930 | \$7,500 | \$6,350 | \$7,180 |

See Refrigeration Accessories on pages 76-79 for options and prices



STEELHEART

PREP TABLES - MEGA TOP REFRIGERATORS



- Stainless steel interior and exterior front, sides and top
- Provided with full complement of polycarbonate plastic 1/6th size pans
- Engineered to maintain NSF-7 temperatures in 100°F ambient.
- Cabinet and doors are insulated with 2" foamed in place polyurethane
- 1/2" x 10" Cutting board with extended top for greater stability
- 6" Stem casters standard

| Model Number | SR60A-12M | SR60A-18M | SR60A-24M | SR72A-18M | SR72A-24M | SR72A-30M |
|---|------------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Nominal Storage Capacity | 17.55 ft ³ | 17.55 ft ³ | 17.55 ft ³ | 21.25 ft ³ | 21.25 ft ³ | 21.25 ft ³ |
| Interior Storage Capacity (AHAM) | 15.386 ft ³ | 15.38 ft ³ | 15.38 ft ³ | 19.7 ft ³ | 19.7 ft ³ | 19.7 ft ³ |
| Overall Dimensions (W x D x H including 6" casters) | 60" x 30" x 44.25" | 60" x 34" x 44.25" | 60" x 34" x 44.25" | 72" x 34" x 44.25" | 72" x 30" x 44.25" | 72" x 34" x 44.25" |
| Depth with Cutting Board installed | 30.7" | 37.3" | 37.3" | 37.3" | 37.3" | 37.3" |
| Depth with doors open at 90° | 57.5" | 57.5" | 57.5" | 52.5" | 51.5" | 52.5" |
| Interior Door opening width | 25.5" | 25.5" | 25.5" | 19.5" | 19.5" | 19.5" |
| Interior Door opening height | 23" | 23" | 23" | 23" | 87.43" | 23" |
| Adjustable Shelves | 2 | 2 | 2 | 2 | 3 | 2 |
| Shelf Dimensions (W x D) | 27.25" x 16" | 27.25" x 16" | 27.25" x 16" | 22" x 16" | 22" x 16" | 22" x 16" |
| Pan Capacity (# of 1/6 size x 4" deep) | 12 | 18 | 24 | 18 | 24 | 30 |
| Crated Shipping Weight | 323 lbs. | 323 lbs. | 323 lbs. | 432 lbs. | 432 lbs. | 432 lbs. |
| Crated Shipping Dimensions (L x W x H) | 62.5" x 34" x 45.75" | 62.5" x 36" x 46.5" | 62.5" x 36" x 46.5" | 74" x 36" x 46.5" | 74" x 34" x 45.75" | 74" x 36" x 46.5" |
| Voltage | 115V/60/1 | 115V/60/1 | 115V/60/1 | 115V/60/1 | 115V/60/1 | 115V/60/1 |
| Amperage (AMP) | 6.0 | 6.0 | 6.0 | 6.1 | 6.0 | 6.1 |
| HACR Breaker (AMP) | 15 | 15 | 15 | 15 | 15 | 15 |
| Energy Consumption (kWh / day) ENERGY STAR / DOE | 4.3 | 4.3 | 4.3 | 6.1 | 6.5 | 6.1 |
| Heat Rejection (BTU / hr) | 597.5 | 613 | 613 | 874 | 874 | 874 |
| Voltage Range | 104 - 126 | 104 - 126 | 104 - 126 | 104 - 126 | 104 - 126 | 104 - 126 |
| Ambient Temp. Range | 45° - 100°F | 45° - 100°F | 45° - 100°F | 45° - 100°F | 45° - 100°F | 45° - 100°F |
| Temperature Range | 32° - 52°F | 32° - 52°F | 32° - 52°F | 32° - 52°F | 32° - 52°F | 32° - 52°F |
| Refrigerant | R290 | R290 | R290 | R290 | R290 | R290 |
| List F.O.B. Griffin | \$7,130 | \$8,360 | \$7,960 | \$9,530 | \$9,690 | \$9,190 |

See Refrigeration Accessories on pages 76-79 for options and prices

PREP TABLES - MEGA TOP REFRIGERATORS with DRAWERS



- Stainless steel interior and exterior front, sides and top
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- Engineered to maintain NSF-7 temperatures in 100°F ambient.
- Cabinet and drawers are insulated with 2" foamed in place polyurethane
- 1/2" x 10" Cutting board with extended top for greater stability
- 6" Stem casters standard

| Model Number | SR27A-12MD2 | SR48A-18MD4 | SR60A-24MD4 | SR72A-30MD6 |
|---|--|--|--|--|
| Nominal Storage Capacity | 7.21 ft ³ | 13.66 ft ³ | 17.55 ft ³ | 21.25 ft ³ |
| Interior Storage Capacity (AHAM) | 6.22 ft ³ | 11.95 ft ³ | 15.4 ft ³ | 19.7 ft ³ |
| Overall Dimensions (W x D x H including 6" casters) | 27" x 34" x 44.25" | 48" x 34" x 44.25" | 60" x 34" x 44.25" | 72" x 34" x 44.25" |
| Depth with Cutting Board installed | 37.3" | 37.3" | 37.3" | 37.3" |
| Depth with Drawer Fully Open | 49.25" | 52" | 52" | 52" |
| Drawer opening width | 19.5" | 19.5" | 19.5" | 19.5" |
| Drawer opening height | 23" | 23" | 23" | 23" |
| Drawer Pan Capacity (pans by others) | (1) 12" x 20" x 6" deep pan per drawer | (1) 1/2 and (1) 1/3 size pan per drawer, 6" deep | (1) 12" x 20" x 6" deep pan per drawer | (1) 1/2 and (1) 1/3 size pan per drawer, 6" deep |
| Pan Capacity (# of 1/6 size x 4" deep) | 12 (6" max. pan depth) | 18 (6" max. pan depth) | 18 (6" max. pan depth) | 30 (6" max. pan depth) |
| Crated Shipping Weight | 205 lbs. | 242 lbs. | 323 lbs. | 530 lbs. |
| Crated Shipping Dimensions (L x W x H) | 31.5" x 34" x 45.75" | 52.5" x 42" x 45.75" | 60" x 34" x 44.25" | 74" x 36" x 46.5" |
| Voltage | 115V/60/1 | 115V/60/1 | 115V/60/1 | 115V/60/1 |
| Amperage (AMP) | 2.6 | 2.56 | 6 | 6.1 |
| HACR Breaker (AMP) | 15 | 15 | 15 | 15 |
| Energy Consumption (kWh / day) ENERGY STAR / DOE | 1.6 | 3.2 | 4.3 | 6.1 |
| Heat Rejection (BTU / hr) | 230 | 452.3 | 613 | 874 |
| Voltage Range | 104 - 126 | 104 - 126 | 104 - 126 | 104 - 126 |
| Ambient Temp. Range | 45° - 100°F | 45° - 100°F | 45° - 100°F | 45° - 100°F |
| Temperature Range | 32° - 52°F | 32° - 52°F | 32° - 52°F | 32° - 52°F |
| Refrigerant | R290 | R290 | R290 | R290 |
| List F.O.B. Griffin | \$7,980 | \$11,340 | \$13,660 | \$16,700 |

See Refrigeration Accessories on pages 76-79 for options and prices



PREP TABLES - MEGA TOP DRAWER / DOOR COMBINATIONS



SR48A-18MD2



SR60A-24MD2



SR72A-30MD2



SR72A-30MD4

- Stainless steel interior and exterior front sides and top
- Cabinet and drawers are insulated with 2" foamed in place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient.
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- Door/Drawer configuration can be located in any cabinet section
- Field reversible doors

| Model Number | SR48A-18MD2 | SR60A-24MD2 | SR72A-30MD2 | SR72A-30MD4 |
|---|--|---------------------------|--|--|
| Nominal Storage Capacity | 13.66 ft ³ | 17.6 ft ³ | 21.25 ft ³ | 21.25 ft ³ |
| Interior Storage Capacity (AHAM) | 11.95 ft ³ | 15.4 ft ³ | 19.7 ft ³ | 19.7 ft ³ |
| Overall Dimensions (W x D x H including 6" casters) | 48" x 34" x 44.25" | 60" x 34" x 44.25" | 72" x 34" x 44.25" | 72" x 34" x 44.25" |
| Depth with Cutting Board installed | 37.3" | 37.3" | 37.3" | 37.3" |
| Depth with Door Open at 90° | 51" | 58.5" | 52.5" | 52.5" |
| Depth with Drawer Fully Open | 51" | 52" | 52.5" | 52.5" |
| Door opening width | 19.5" | 25.5" | 19.5" | 19.5" |
| Door opening height | 23" | 23" | 23" | 23" |
| Adjustable Shelves / Shelf Dimensions (WxD) | (1) 21.25" x 16" | (1) 27.25" x 16" | (2) 22" x 16" | (1) 22" x 16" |
| Drawer Pan Capacity (pans by others) | (1) 1/2 and (1) 1/3 size pan per drawer, 6" deep | (1) full size pan 6" deep | (1) 1/2 and (1) 1/3 size pan per drawer, 6" deep | (1) 1/2 and (1) 1/3 size pan per drawer, 6" deep |
| Pan Capacity (# of 1/6 size x 4" deep) | 18 (6" max. pan depth) | 24 (6" max. pan depth) | 30 (6" max. pan depth) | 30 (6" max. pan depth) |
| Crated Shipping Weight | 242 lbs. | 323 lbs. | 497 lbs. | 497 lbs. |
| Crated Shipping Dimensions (L x W x H) | 52.5" x 42" x 45.75" | 62.5" x 36" x 46.5" | 73.75" x 36" x 46.5" | 73.75" x 36" x 46.5" |
| Voltage | 115V/60/1 | 115V/60/1 | 115V/60/1 | 115V/60/1 |
| Amperage (AMP) | 2.5 | 6.0 | 6.1 | 6.1 |
| HACR Breaker (AMP) | 15 | 15 | 15 | 15 |
| Energy Consumption (kWh / day) ENERGY STAR / DOE | 3.2 | 4.3 | 6.1 | 6.1 |
| Heat Rejection (BTU / hr) | 452.3 | 613 | 874 | 874 |
| Voltage Range | 104 - 126 | 104 - 126 | 104 - 126 | 104 - 126 |
| Ambient Temp. Range | 45° -100°F | 45° -100°F | 45° -100°F | 45° -100°F |
| Temperature Range | 32° - 52°F | 32° - 52°F | 32° - 52°F | 32° - 52°F |
| Refrigerant | R290 | R290 | R290 | R290 |
| List F.O.B. Griffin | \$9,890 | \$12,260 | \$13,400 | \$14,980 |

Made to order: Allow 4-6 week lead time. Door and drawer configuration is customizable. See Refrigeration Accessories on pages 76-79 for options and prices

Please check with your distributor for availability.



PREP TABLES - PIZZA REFRIGERATORS

STEELHEART



PR46A



PR67A



PR93A

- Stainless steel interior and exterior front, sides and top
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Engineered to maintain NSF-7 temperatures in 100°F ambient.
- Adjustable ducted air distribution for rail/cabinet
- Full complement of 1/3rd size pans are standard
- 1/2" x 19" Cutting board standard

| Model Number | PR46A | PR67A | PR93A |
|---|-----------------------|-----------------------|------------------------|
| Nominal Storage Capacity | 11.0 ft ³ | 19.9 ft ³ | 30 ft ³ |
| Overall Dimensions (W x D x H including 6" casters) | 46" x 32.25" x 43.5" | 67" x 32.25" x 43.5" | 93" x 32.25" x 43.5" |
| Depth with Cutting Board installed | 35" | 35" | 35" |
| Depth with doors open at 90° | 60.5" | 56.75" | 57.75" |
| Interior Door opening width | 22.5" | 22.5" | 22.5" |
| Interior Door opening height | 23" | 23" | 23" |
| Adjustable Shelves | 2 | 4 | 6 |
| Shelf Dimensions (W x D) | 22" x 16" | 24.75" x 25.5" | 24.75" x 25.5" |
| Pan Capacity (# of 1/3 size x 4" deep) | 6 (6" max. pan depth) | 9 (6" max. pan depth) | 12 (6" max. pan depth) |
| Crated Shipping Weight | 312 lbs. | 420 lbs. | 577 lbs. |
| Crated Shipping Dimensions (L x W x H) | 48.75" x 34.75" x 45" | 69" x 34.75" x 44" | 95" x 34.75" x 45" |
| Voltage | 115V/60/1 | 115V/60/1 | 115V/60/1 |
| Amperage (AMP) | 6 | 6 | 6.5 |
| HACR Breaker (AMP) | 15 | 15 | 15 |
| Energy Consumption (kWh / day) @ NSF | 4.8 | 5.4 | 6.2 |
| Heat Rejection (BTU / hr) | 688 | 767 | 877 |
| Voltage Range | 104 - 126 | 104 - 126 | 104 - 126 |
| Ambient Temp. Range | 45° - 100°F | 45° - 100°F | 45° - 100°F |
| Control Set Point Range | 14° - 45°F | 14° - 45°F | 14° - 45°F |
| Refrigerant | R290 | R290 | R290 |
| List F.O.B. Griffin | \$7,990 | \$11,070 | \$14,800 |

See Refrigeration Accessories on pages 76-79 for options and prices



PREP TABLES - PIZZA REFRIGERATORS with DRAWERS



PR46A-D2



PR67A-D4



PR93A-D6

- Stainless steel interior and exterior front, sides and top
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Provided with full complement of polycarbonate plastic 1/3rd size pans 4" deep
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Adjustable ducted air distribution for rail/cabinet
- Cabinet and drawers are insulated with 2" foamed in place polyurethane
- 1/2" x 19" Cutting board standard

| Model Number | PR46A-D2 | PR67A-D4 | PR93A-D6 |
|--|------------------------------|------------------------------|------------------------------|
| Nominal Storage Capacity | 11 ft ³ | 19.9 ft ³ | 30 ft ³ |
| Overall Dimensions (W x D x H including casters) | 46" x 32.25" x 43.5" | 67" x 32.25" x 43.5" | 93" x 32.25" x 43.5" |
| Depth with Cutting Board installed | 36" | 36" | 36" |
| Depth with Drawer Fully Open | 56.5" | 57.5" | 57.5" |
| Drawer Pan Capacity (pans by others) | (2) 12" x 20" x 6" deep pans | (2) 12" x 20" x 6" deep pans | (2) 12" x 20" x 6" deep pans |
| Pan Capacity (# of 1/3 size x 4" deep) | 6 | 9 | 12 |
| Crated Shipping Weight | 365 lbs. | 505 lbs. | 693 lbs. |
| Crated Shipping Dimensions (L x W x H) | 48.75" x 34.75" x 45" | 69" x 34.75" x 45" | 95" x 34.75" x 45" |
| Voltage | 115V/60/1 | 115V/60/1 | 115V/60/1 |
| Amperage (AMP) | 6 | 6 | 6.5 |
| HACR Breaker (AMP) | 15 | 15 | 15 |
| Energy Consumption (kWh / day) ENERGY STAR / DOE | 4.8 | 5.4 | 6.2 |
| Heat Rejection (BTU / hr) | 688 | 767 | 877 |
| Voltage Range | 104 - 126 | 104 - 126 | 104 - 126 |
| Ambient Temp. Range | 45° -100°F | 45° -100°F | 45° -100°F |
| Control Set Point Range | 14° - 45°F | 14° - 45°F | 14° - 45°F |
| Refrigerant | R290 | R290 | R290 |
| List F.O.B. Griffin | \$10,330 | \$16,040 | \$22,170 |

See Refrigeration Accessories on pages 76-79 for options and prices



PREP TABLES - PIZZA DRAWER / DOOR COMBINATIONS

STEELHEART



PR67A-D2



PR93A-D2



PR93A-D4

- Stainless steel interior and exterior front sides and top
- Provided with full complement of polycarbonate plastic 1/3rd size pans 4" deep
- Enamel coated evaporator coil
- Engineered to maintain NSF-7 temperatures in 100°F ambient.
- Cabinet and drawers are insulated with 2" foamed in place polyurethane
- Door/Drawer configuration can be located in any cabinet section
- Field reversible doors

| Model Number | PR67A-D2 | PR93A-D2 | PR93A-D4 |
|---|------------------------------|------------------------------|------------------------------|
| Interior Storage Capacity (AHAM) | 19.9 ft ³ | 30 ft ³ | 30 ft ³ |
| Overall Dimensions (W x D x H including 6" casters) | 67" x 32.25" x 43.5" | 93" x 32.25" x 43.5" | 93" x 32.25" x 43.5" |
| Depth with Cutting Board installed | 35" | 35" | 35" |
| Depth with Door Open at 90° | 56.75" | 56.75" | 56.75" |
| Depth with Drawer Fully Open | 56.75" | 56.75" | 56.75" |
| Door opening width | 22.5" | 22.5" | 22.5" |
| Door opening height | 23" | 23" | 23" |
| Adjustable Shelves / Shelf Dimensions (WxD) | (2) 24.75" x 25.5" | (2) 24.75" x 25.5" | (2) 24.75" x 25.5" |
| Drawer Pan Capacity (pans by others) | (2) 12" x 20" x 6" deep pans | (2) 12" x 20" x 6" deep pans | (2) 12" x 20" x 6" deep pans |
| Pan Capacity (# of 1/3 size x 4" deep) | 9 | 12 | 12 |
| Crated Shipping Weight | 462 lbs. | 547 lbs. | 654 lbs. |
| Crated Shipping Dimensions (L x W x H) | 69" x 34.75" x 44" | 95" x 34.75" x 45" | 95" x 34.75" x 45" |
| Voltage | 115V/60/1 | 115V/60/1 | 115V/60/1 |
| Amperage (AMP) | 6 | 6.5 | 6.5 |
| HACR Breaker (AMP) | 15 | 15 | 15 |
| Energy Consumption (kWh / day) ENERGY STAR / DOE | 5.4 | 6.2 | 6.2 |
| Heat Rejection (BTU / hr) | 767 | 877 | 877 |
| Voltage Range | 104 - 126 | 104 - 126 | 104 - 126 |
| Ambient Temp. Range | 45° -100°F | 45° -100°F | 45° -100°F |
| Temperature Range | 14° - 45°F | 14° - 45°F | 14° - 45°F |
| Refrigerant | R290 | R290 | R290 |
| List F.O.B. Griffin | \$13,800 | \$17,680 | \$20,040 |

Made to order: Allow 4-6 week lead time. Door and drawer configuration is customizable. See Refrigeration Accessories on pages 76-79 for options and prices

Please check with your distributor for availability.



REFRIGERATED EQUIPMENT STANDS



- Stainless steel interior and exterior front, sides and top
- 16 gauge stainless steel top with marine edge front and rear and 1" turn-up at each end
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Top is provided with an exclusive, built in, ceramic heat shield
- Standard with (4-8) 4" casters all with brakes
- Electronic controls

| Model Number | CR36A | CR49A | CR60A | CR72A | CR85A | CR98A | CR110A |
|--|--|------------------------------|------------------------------|------------------------------|---|------------------------------|------------------------------|
| Overall Dimensions (W x D x H including 4" casters) | 36.5" x 33.25" x 26" | 49" x 33.25" x 26" | 60.5" x 32.25" x 26" | 72.52" x 33.25" x 26" | 85" x 32.25" x 26" | 98" x 32.25" x 26" | 110.5" x 33.25" x 26" |
| Depth with Drawer Fully Open | 54.75" | 54.25" | 54.75" | 55.75" | 55.75" | 54.75" | 54.75" |
| Maximum Pan Depth | 6" | 6" | 6" | 6" | 6" | 6" | 6" |
| Worktop Maximum Load Capacity | 700 lbs | 700 lbs | 700 lbs | 1200 lbs | 1200 lbs | 1500 lbs | 1500 lbs |
| Drawer Pan Capacity (pans by others) | (1) 12" x 20" x 6" deep pans and (1) 1/2 long pan 6" deep (pans by others) | (2) 12" x 20" x 6" deep pans | (2) 12" x 20" x 6" deep pans | (2) 12" x 20" x 6" deep pans | Left drawers: (3) 12" x 20" x 6" deep pans Right drawers: (2) 12" x 20" x 6" deep pans | (3) 12" x 20" x 6" deep pans | (3) 12" x 20" x 6" deep pans |
| Pan Capacity (12" x 20") | 2 | 2.5 | 2.5 | 8 | 10 | 12 | 12 |
| Crated Shipping Weight | 260 lbs. | 339 lbs. | 396 lbs. | 500 lbs. | 567 lbs. | 646 lbs. | 675 lbs. |
| Crated Shipping Dimensions (L x W x H) | 38" x 34.5" x 30.5" | 51" x 34.5" x 28.75" | 62.5" x 34.5" x 30.5" | 74" x 34.5" x 30.5" | 87" x 34.5" x 30.5" | 100" x 34.5" x 30.5" | 112" x 34.5" x 30.5" |
| Voltage | 115V/60/1 | 115V/60/1 | 115V/60/1 | 115V/60/1 | 115V/60/1 | 115V/60/1 | 115V/60/1 |
| Amperage (AMP) | 2.2 | 2.7 | 2.7 | 3.0 | 3.0 | 3.0 | 3.0 |
| HACR Breaker (AMP) | 15 | 15 | 15 | 15 | 15 | 15 | 15 |
| Energy Consumption (kWh / day) NSF | 1.6 | 2.1 | 2.1 | 2.78 | 2.9 | 3.69 | 3.69 |
| Heat Rejection (BTU / hr) @ NSF | 223 | 303 | 303 | 395 | 415 | 525 | 525 |
| Voltage Range | 104 - 126 | 104 - 126 | 104 - 126 | 104 - 126 | 104 - 126 | 104 - 126 | 104 - 126 |
| Ambient Temp. Range | 45° - 100°F | 45° - 100°F | 45° - 100°F | 45° - 100°F | 45° - 100°F | 45° - 100°F | 45° - 100°F |
| Control Set Point Range | 32° - 52°F | 32° - 52°F | 32° - 52°F | 32° - 52°F | 32° - 52°F | 32° - 52°F | 32° - 52°F |
| Refrigerant | R290 | R290 | R290 | R290 | R290 | R290 | R290 |
| List F.O.B. Griffin | \$11,110 | \$12,110 | \$12,560 | \$14,410 | \$16,810 | \$18,710 | \$19,280 |

See Refrigeration Accessories on pages 76-79 for options and prices





BACK BAR REFRIGERATOR



HBB-2-59(-S*)



HBB-3-69(-S*)



HBB-3-80(-S*)



HBB-4-95(-S*)

- Stainless steel interior with LED lights
- Heavy duty 18-gauge stainless steel top
- Maximum product storage capacity with the ability to store tall boys three high per section
- Black vinyl coated or stainless steel exterior front, sides, and rear
- Doors come with a stainless steel interior liner are self-closing and include locks
- Engineered to maintain NSF-7 temperatures in 100°F ambient

| Model Number | HBB-2-59(-S*) | HBB-3-69(-S*) | HBB-3-80(-S*) | HBB-4-95(-S*) |
|----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| Cabinet Dimensions W x D x H | 59.5" x 29" x 36.88" | 69.5 x 29" x 36.88" | 80" x 29" x 36.88" | 95.5" x 29" x 36.88" |
| Capacity (AHAM) cu ft | 18.56 ft ³ | 22.17 ft ³ | 28.74 ft ³ | 32.4 ft ³ |
| Capacity 12oz. cans | 852 | 1014 | 1092 | 1302 |
| Door(s) | 2 | 2 | 3 | 3 |
| Shelves | 4 | 4 | 6 | 6 |
| Capacity 1/2 Barrels | 3 | 3 | 4 | 5 |
| HP | 1/3 | 1/3 | 1/3 | 1/3 |
| Voltage | 115V/60/1 | 115V/60/1 | 115V/60/1 | 115V/60/1 |
| Amperage (AMP) | 5.2 | 5.2 | 5.2 | 5.2 |
| NEMA Plug | 8 ft. 5-15P | 8 ft. 5-15P | 8 ft. 5-15P | 8 ft. 5-15P |
| Shipping Dimensions W x D x H | 63.5" x 33" x 42" | 73.5" x 33" x 42" | 84" x 33" x 42" | 101" x 33" x 42" |
| Shipping Weight | 307 lbs. | 332 lbs. | 396 lbs. | 429 lbs. |
| List F.O.B. Griffin | \$5,040 *\$6,000 | \$5,510 *\$6,610 | \$6,360 *\$8,220 | \$6,480 *\$8,340 |

*(-S) Stainless Steel Exterior option available - Made to order.
See Refrigeration Accessories on pages 76-79 for options and prices



BACK BAR REFRIGERATOR with GLASS DOORS



HBB-2G-LD-59(-S*)



HBB-3G-LD-69(-S*)



HBB-3G-LD-80(-S*)



HBB-4G-LD-95(-S*)

- Stainless steel interior with LED lights
- Heavy duty 18-gauge stainless steel top
- Maximum product storage capacity with the ability to store tall boys three high per section
- Black vinyl coated or stainless steel exterior front, sides, and rear
- Energy efficient Low-E Multi pane glass self-closing doors come standard with barrel locks
- Engineered to maintain NSF-7 temperatures in 100°F ambient

| Model Number | HBB-2G-LD-59(-S*) | HBB-3G-LD-69(-S*) | HBB-3G-LD-80(-S*) | HBB-4G-LD-95(-S*) |
|----------------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Cabinet Dimensions W x D x H | 59.5" x 29" x 36.88" | 69.5 x 29" x 36.88" | 80" x 29" x 36.88" | 95.5" x 29" x 36.88" |
| Capacity (AHAM) cu ft | 18.45 ft ³ | 22.14 ft ³ | 26.74 ft ³ | 32.53 ft ³ |
| Capacity 12oz. cans | 852 | 1014 | 1092 | 1302 |
| Door(s) | 2 | 2 | 3 | 3 |
| Shelves | 4 | 4 | 6 | 6 |
| Capacity 1/2 Barrels | 3 | 3 | 4 | 5 |
| HP | 1/3 | 1/3 | 1/3 | 1/3 |
| Voltage | 115V/60/1 | 115V/60/1 | 115V/60/1 | 115V/60/1 |
| Amperage (AMP) | 5.2 | 5.2 | 5.2 | 5.2 |
| NEMA Plug | 8 ft. 5-15P | 8 ft. 5-15P | 8 ft. 5-15P | 8 ft. 5-15P |
| Shipping Dimensions W x D x H | 63.5" x 33" x 42" | 73.5" x 33" x 42" | 84" x 33" x 42" | 101" x 33" x 42" |
| Shipping Weight | 332 lbs. | 357 lbs. | 396 lbs. | 429 lbs. |
| List F.O.B. Griffin | \$5,270 *\$6,080 | \$5,960 *\$6,930 | \$7,040 *\$8,450 | \$7,160 *\$8,840 |

*(-S) Stainless Steel Exterior option available - Made to order.
See Refrigeration Accessories on pages 76-79 for options and prices



SLIDE TOP BOTTLE COOLERS



HBC-50(-S*)



HBC-65(-S*)



HBC-80(-S*)



HBC-95(-S*)

- Stainless steel interior
- Heavy duty 18-gauge stainless steel top
- Front breathing, side mount refrigeration is easily accessible by sliding out front for cleaning and service
- Black vinyl coated or stainless steel exterior front, sides, and rear
- Durable stainless steel slide top lids including locks
- Engineered to maintain NSF-7 temperatures in 100°F ambient

| Model Number | HBC-50(-S*) | HBC-65(-S*) | HBC-80(-S*) | HBC-95(-S*) |
|--|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| Cabinet Dimensions [†] W x D x H | 50.5" x 26.5" x 33.38" | 65.5" x 26.5" x 33.38" | 80" x 26.5" x 33.38" | 95" x 26.5" x 33.38" |
| Capacity (AHAM) cu ft | 14.4 ft ³ | 19.6 ft ³ | 24.67 ft ³ | 27.98 ft ³ |
| Capacity 12oz. / 20oz. Cans | 704 / 286 | 890 / 360 | 1150 / 547 | 1408 / 672 |
| Lids | 2 | 2 | 3 | 3 |
| Bin Dividers | 3 | 4 | 6 | 7 |
| HP | 1/4 | 1/3 | 1/3 | 1/2 |
| Voltage | 115V/60/1 | 115V/60/1 | 115V/60/1 | 115V/60/1 |
| Amperage (AMP) | 5.9 | 6.2 | 6.2 | 6.5 |
| NEMA Plug | 8 ft. 5-15P | 8 ft. 5-15P | 8 ft. 5-15P | 8 ft. 5-15P |
| Shipping Dimensions W x D x H | 54.5" x 33" x 42" | 69.5" x 33" x 42" | 84" x 33" x 42" | 101" x 33" x 42" |
| Shipping Weight | 236 lbs. | 275 lbs. | 315 lbs. | 379 lbs. |
| List F. O. B. Griffin | \$4,270 *\$5,110 | \$4,750 *\$5,550 | \$5,990 *\$6,860 | \$6,330 *\$7,270 |

*(-S) Stainless Steel Exterior option available - Made to order.

† Does not include 1" rear cabinet bumper or bottle cap catcher depth
See Refrigeration Accessories on pages 76-79 for options and prices



DIRECT DRAW REFRIGERATOR



HDD-1-24(-S*)



HDD-2-59(-S*)



HDD-3-69(-S*)



HDD-3-80(-S*)



HDD-4-95(-S*)

- Stainless steel interior
- Heavy duty 18-gauge stainless steel top
- Polished stainless-steel insulated towers with plated brass faucet
- Black vinyl coated or stainless steel exterior front, sides, and rear
- Stainless steel threshold protects door frame from damage when loading and unloading
- Keg cushions standard to protect floor and increase air flow around kegs

| Model Number | HDD-1-24(-S*) | HDD-2-59(-S*) | HDD-3-69(-S*) | HDD-3-80(-S*) | HDD-4-95(-S*) |
|----------------------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Cabinet Dimensions W x D x H | 24.88" x 30" x 39.38" | 59.5" x 29" x 36.88" | 69.5" x 29" x 36.88" | 80" x 29" x 36.88" | 95.5" x 29" x 36.88" |
| Capacity (AHAM) cu ft | 7.46 ft ³ | 18.45 ft ³ | 22.14 ft ³ | 26.79 ft ³ | 32.53 ft ³ |
| Door(s) | 1 | 2 | 2 | 3 | 3 |
| Tower(s) | 1 | 2 | 2 | 2 | 2 |
| Tap(s) | 1 | 3 | 3 | 4 | 4 |
| Capacity 1/2 Barrels | 1 | 3 | 3 | 4 | 5 |
| HP | 1/6 | 1/3 | 1/3 | 1/3 | 1/3 |
| Voltage | 115V/60/1 | 115V/60/1 | 115V/60/1 | 115V/60/1 | 115V/60/1 |
| Amperage (AMP) | 2.5 | 5.2 | 5.2 | 5.2 | 5.2 |
| NEMA Plug | 5-15P | 5-15P | 5-15P | 5-15P | 5-15P |
| Shipping Dimensions W x D x H | 28" x 33" x 43" | 63.5" x 33" x 42" | 73.5" x 33" x 42" | 84" x 33" x 42" | 101" x 33" x 42" |
| Shipping Weight | 165 lbs. | 343 lbs. | 370 lbs. | 396 lbs. | 429 lbs. |
| List F.O.B. Griffin | \$3,670 **\$4,670 | \$6,140 **\$7,260 | \$6,760 **\$8,510 | \$7,200 **\$8,750 | \$7,320 **\$8,880 |

*(-S) Stainless Steel Exterior option available - Made to order.
See Refrigeration Accessories on pages 76-79 for options and prices



GLASS DOOR MERCHANDISERS



RM-7-HC

RM-10

RM-26

RM-45-SD
(Sliding doors)

RM-49

- Electronic controller with visual and audio high and low temperature alarms
- Forced air evaporator for quick temperature pull down
- Large glass door(s) is energy efficient low-E multi pane glass
- Doors mounted on heavy duty hinges with self-closing mechanism
- Three year parts and labor warranty & Five year compressor warranty
- 8 Foot cord and plug


| Model Number | RM-7-HC | RM-10 | RM-26 | RM-45-SD | RM-49 |
|--|--|--|--|---|---|
| Nominal Storage Capacity | 5.97 ft ³ | 10 ft ³ | 26 ft ³ | 45 ft ³ | 49 ft ³ |
| Capacity | 20 oz. bottles: 102 12 oz. bottles: 217 | 20 oz. bottles: 126 12 oz. bottles: 288 | 20 oz. bottles: 360 12 oz. bottles: 900 | 20 oz. bottles: 560 12 oz. bottles: 1260 | 20 oz. bottles: 630 12 oz. bottles: 1440 |
| Overall Dimensions (W x D x H including 4" casters) | 21.25" x 25" x 37.75" | 25.5" x 23" x 55.5" | 30" x 29.75" x 78" | 51" x 30.25" x 78.25" | 60" x 29.75" x 78" |
| Adjustable Shelves | 2 adjustable, 1 floor shelf | 3 | 5 | 5 per section | 5 per section |
| Shelf Dimensions (W x D) | 17.75" x 20.75" 18" x 9.25" (Floor) | 21.25" x 17.5" | 25.75" x 24" | 23" x 20.5" | 27" x 21.75" |
| Crated Shipping Weight | 155 lbs. | 206 lbs. | 340 lbs. | 545 lbs. | 585 lbs. |
| Crated Shipping Dimensions (L x W x H) | 30" x 30" x 42" | 30" x 28" x 60" | 34" x 34" x 82" | 55" x 34" x 85" | 64" x 34" x 84" |
| Voltage | 115V/60/1 | 115V/60/1 | 115V/60/1 | 115V/60/1 | 115V/60/1 |
| Amperage (AMP) | 3.2 | 3.7 | 4.7 | 11.8 | 7.1 |
| HACR Breaker (AMP) | 15 | 15 | 15 | 15 | 15 |
| Energy Consumption (kWh / day) ENERGY STAR / DOE | 1.39 | 1.24 | 2.03 | 3.84 | 4.19 |
| Approx. Nominal Compress BTU/HR (HP) | 1/8HP | 1/5HP | 1/3HP | 1/2HP | 1/2HP |
| Voltage Range | 104 - 126 | 104 - 126 | 104 - 126 | 104 - 126 | 104 - 126 |
| Ambient Temp. Range | 60° - 86°F | 60° - 86°F | 60° - 86°F | 60° - 86°F | 60° - 86°F |
| Control Set Point Range | 34° - 40°F | 34° - 40°F | 34° - 40°F | 34° - 40°F | 34° - 40°F |
| Refrigerant | R-290 | R-134a | R-134a | R-134a | R-134a |
| List F.O.B. Griffin | \$3,490 | \$3,930 | \$5,000 | \$7,380 | \$7,700 |

See Refrigeration Accessories on pages 76-79 for options and prices






REFRIGERATION ACCESSORIES

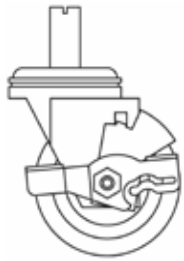


CASTERS



**FOOT PEDAL
DOOR OPENER**



SHELVES



TRAY / PAN SLIDES

CASTERS & LEGS

| Model Number | Description | List F. O. B. Griffin |
|--------------|--|-----------------------|
| HS-3546 | 4" Casters - Set of four, two with brakes (1/2 Section Uprights) | \$370 |
| HS-3547 | 4" Casters - Set of six, three with brakes (3 Section Uprights) | \$580 |
| HS-5035 | 4" Casters - Set of four, two with brakes (1, 2 & 3 Section Horizontal Units) | \$100 |
| HS-5036 | 6" Casters - Set of four, two with brakes (1, 2 & 3 Section Horizontal Units) | \$130 |
| HS-5037 | 2 1/4" Casters - Set of four, two with brakes (1 & 2 Section Undercounters) for ADA Compliant dimensions | \$110 |
| HS-5320 | 3 3/8" Casters - Set of four, two with brakes (for pizza prep tables) for ADA Compliant dimensions | \$100 |
| HS-5321 | 3 3/8" Casters - Set of six, two with brakes (for pizza prep tables) for ADA Compliant dimensions | \$140 |

FOOT PEDALS

| Model Number | Description | List F. O. B. Griffin |
|--------------|--|-----------------------|
| HS-5378 | One Door Foot Pedal - Left Hand Hinge | \$280 |
| HS-5379 | One Door Foot Pedal - Right Hand Hinge | \$280 |
| HS-5380 | Two Door Foot Pedal | \$470 |

DOOR REVERSAL KIT

| Model Number | Description | List F. O. B. Griffin |
|--------------|--|-----------------------|
| HS-5258 | Door Reversal Kit - Undercounter Glass Door Models (Right Hinge to Left Hinge) | \$180 |
| HS-5259 | Door Reversal Kit - Undercounter Glass Door Models (Left Hinge to Right Hinge) | \$180 |

FULL SHELVES

| Model Number | Description | For Use With | List F. O. B. Griffin |
|--------------|---|--|-----------------------|
| HS-5052 | Industrial Strength Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips | 1,2,3 Section Uprights 1,2 dual temps | \$130 |
| HS-5053 | Industrial Strength Epoxy Coated Wire Shelf, 3 each, Includes 12 Pilaster Clips | 1,2,3 Section Uprights 1,2 dual temps | \$270 |
| HS-5054 | Industrial Strength Stainless Steel Shelf, Includes 4 Pilaster Clips | 1,2,3 Section Uprights 1,2 dual temps | \$280 |
| HS-5058 | Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips | All 27" and 72" Undercounters, Worktops and Prep Tables | \$90 |
| HS-5235 | Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips | All 36" Undercounters, Worktops and Prep Tables | \$140 |
| HS-5059 | Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips | All 48" Undercounters, Worktops and Prep Tables | \$90 |
| HS-5108 | Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips | All 60" Undercounters, Worktops and Prep Tables | \$110 |
| HS-5116 | Stainless Steel Shelf, Includes 4 Pilaster Clips | All 27" and 72" Undercounters, Worktops and Prep Tables | \$210 |
| HS-5117 | Stainless Steel Shelf, Includes 4 Pilaster Clips | All 48" Undercounters, Worktops and Prep Tables | \$260 |



| | | | |
|----------------|--|---|--------------|
| HS-5118 | Stainless Steel Shelf, Includes 4 Pilaster Clips | All 60" Undercounters, Worktops and Prep Tables | \$310 |
| HS-5151 | Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips | CPT67/93 | \$180 |
| HS-5152 | Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips | PR46A | \$180 |
| HS-5153 | Stainless Steel Shelf, Includes 4 Pilaster Clips | CPT67/93 | \$320 |
| HS-5154 | Stainless Steel Shelf, Includes 4 Pilaster Clips | PR46A | \$330 |

OVERSHELVES

| Model Number | Description | For Use With | List F.O.B. Griffin |
|----------------------------|--|--|---------------------|
| HS-5172[†] | Single Overshelf for 27" Cabinet | 27" Undercounters, Worktops, Sandwich Top & Mega Top | \$590 |
| HS-5237[†] | Single Overshelf for 36" Cabinet | 36" Undercounters, Worktops, Sandwich Top & Mega Top | \$650 |
| HS-5173[†] | Single Overshelf for 48" Cabinet | 48" Undercounters, Worktops, Sandwich Top & Mega Top | \$680 |
| HS-5174[†] | Single Overshelf for 60" Cabinet | 60" Undercounters, Worktops, Sandwich Top & Mega Top | \$830 |
| HS-5175[†] | Single Overshelf for 72" Cabinet | 72" Undercounters, Worktops, Sandwich Top & Mega Top | \$1,000 |
| HS-5163[†] | Double Overshelf for 27" Cabinet | 27" Undercounters, Worktops, Sandwich Top & Mega Top | \$740 |
| HS-5236[†] | Double Overshelf for 36" Cabinet | 36" Undercounters, Worktops, Sandwich Top & Mega Top | \$820 |
| HS-5164[†] | Double Overshelf for 48" Cabinet | 48" Undercounters, Worktops, Sandwich Top & Mega Top | \$1,050 |
| HS-5165[†] | Double Overshelf for 60" Cabinet | 60" Undercounters, Worktops, Sandwich Top & Mega Top | \$1,510 |
| HS-5166[†] | Double Overshelf for 72" Cabinet | 72" Undercounters, Worktops, Sandwich Top & Mega Top | \$1,950 |
| HS-5229** | Single Overshelf for 46" / 93" Cabinet | 46" / 93" Pizza Prep Tables 93" cabinets can accommodate (2) HS-5229 Single Overshelves | \$750 |
| HS-5231[†] | Single Overshelf for 67" Cabinet | 67" Pizza Prep Tables | \$890 |
| HS-5228** | Double Overshelf for 46" / 93" Cabinet | 46" / 93" Pizza Prep Tables 93" cabinets can accommodate (2) HS-5228 Double Overshelves | \$1,130 |
| HS-5230[†] | Double Overshelf for 67" Cabinet | 67" Pizza Prep Tables | \$1,470 |

[†]Compatible with models manufactured since March 2016. (Serial # FXXXXXC and after)

^{*}Compatible with models manufactured since January 2017. (Serial # GXXXXXA and after)

* 93" cabinets can accommodate (2) HS-5229 Single Overshelves or (2) HS-5228 Double Overshelves.

TRAY / PAN SLIDES

(16) Sets on 3" Centers per section is the recommended maximum capacity for Commercial Uprights. Units can hold as many as (24) sets on 2" Centers per section.

| Model Number | Description | List F.O.B. Griffin |
|----------------|---|---------------------|
| HS-3557 | Stainless Steel Bottom Support Universal Pan Slides (1 Set)*, Includes 4 Pilaster Clips | \$170 |
| HS-3558 | Stainless Steel Bottom Support Universal Pan Slides (4 Sets)*, Includes 16 Pilaster Clips | \$550 |
| HS-5092 | Stainless Steel Bottom Support Wire Tray Slides (1 Set) for 18x26 Baker Pan Only, Includes 4 Pilaster Clips | \$120 |
| HS-5093 | Stainless Steel Bottom Support Wire Tray Slides (4 Sets) for 18x26 Baker Pan Only, Includes 16 Pilaster Clips | \$390 |

CPT PAN SLIDES

| Model Number | Description | List F.O.B. Griffin |
|----------------|--|---------------------|
| HS-5315 | Removable Tray Pan Rack For CPT- Accommodates (6) 18" x 26" Sheet Pans With 3" Spacing | \$850 |

FLAT LIFT OFF COVERS

| Model Number | Description | For Use With | List F.O.B. Griffin |
|-------------------|--|---|-----------------------|
| HS-5070 | Flat Lift-Off Stainless Steel Cover - 12 pan Mega Top opening | SR27A-12M, CRMR48-12M, CRMR60-12M *CRMR60-24M, *SR72A-24M, CRMR27-12MD *CRMR60-24MD4 (*2 of each cover required per model) | \$270 |
| HS-5279 | Flat Lift-Off Stainless Steel Cover - 15 pan Mega Top opening | CRMR36-15M | \$270 |
| HS-5071 | Flat Lift-Off Stainless Steel Cover - 18 pan Mega Top opening | CRMR48-18M, CRMR60-18M, CRMR72-18M CRMR48-18MD4 | \$270 |
| HS-5072 | Flat Lift-Off Stainless Steel Cover - CRMR27-8 | CRMR27-8, CRMR27-8D | \$270 |
| HS-5073 | Flat Lift-Off Stainless Steel Cover - CRMR48-8 | CRMR48-8, CRMR60-8 | \$270 |
| HS-5278 | Flat Lift-Off Stainless Steel Cover - 10 pan Sandwich Top opening | WF27A-D2 | \$270 |
| HS-5074 | Flat Lift-Off Stainless Steel Cover - 12 pan Sandwich Top opening | CRMR48-12, CRMR48-12MD4, CRMR60-12, SR72A-12 | \$270 |
| HS-5106 | Flat Lift-Off Stainless Steel Cover - CRMR60-16, CRMR72-16 | CRMR60-16, CRMR27-16 | \$340 |
| HS-5107 | Flat Lift-Off Stainless Steel Cover - CRMR72-18 | CRMR72-18 | \$340 |
| HS-5070 + HS-5071 | Flat Lift-Off Stainless Steel Cover - 12 pan Mega Top opening Flat Lift-Off Stainless Steel Cover - 18 pan Mega Top opening | CRMR72-30M, CRMR72-30M6 (1 of each cover required per model) | \$270 (Each Cover) |

COMPOSITE CUTTING BOARDS

| Model Number | Description | For Use With | List F.O.B. Griffin |
|--------------|--|-----------------------------|---------------------|
| HS-5265 | 10" x 27" x 1/2" Composite Cutting Board | 27" Sandwich Top & Mega Top | \$260 |
| HS-5266 | 10" x 36" x 1/2" Composite Cutting Board | 36" Sandwich Top & Mega Top | \$340 |
| HS-5267 | 10" x 48" x 1/2" Composite Cutting Board | 48" Sandwich Top & Mega Top | \$460 |
| HS-5268 | 10" x 60" x 1/2" Composite Cutting Board | 60" Sandwich Top & Mega Top | \$570 |
| HS-5269 | 10" x 72" x 1/2" Composite Cutting Board | 72" Sandwich Top & Mega Top | \$680 |
| HS-5270 | 19" x 46" x 1/2" Composite Cutting Board | 46" Pizza Prep Tables | \$830 |
| HS-5271 | 19" x 67" x 1/2" Composite Cutting Board | 67" Pizza Prep Table | \$1,260 |
| HS-5272 | 19" x 93" x 1/2" Composite Cutting Board | 93" Pizza Prep Table | \$1,750 |

GLASS DOOR MERCHANDISER ACCESSORIES

| Model Number | Description | For Use With | List F.O.B. Griffin |
|--------------|--|-------------------------------|---------------------|
| HS-5446 | Organizer Shelf With Tracks, Includes 4 Pilaster Clips | RM-10 | \$135 |
| HS-5291 | Organizer Shelf With Tracks, Includes 4 Pilaster Clips | RM-26 | \$150 |
| HS-5293 | Organizer Shelf With Tracks, Includes 4 Pilaster Clips | RM-45-SD | \$150 |
| HS-5295 | Organizer Shelf With Tracks, Includes 4 Pilaster Clips | RM-49 | \$150 |
| HS-5290 | Price Tag Holder | RM-10 | \$16 |
| HS-5292 | Price Tag Holder | RM-26 | \$16 |
| HS-5294 | Price Tag Holder | RM-45-SD | \$16 |
| HS-5296 | Price Tag Holder | RM-49 | \$16 |
| HS-5316 | Epoxy Shelf, Includes 4 Pilaster Clips | RM-10 | \$100 |
| HS-5317 | Epoxy Shelf, Includes 4 Pilaster Clips | RM-26 | \$130 |
| HS-5318 | Epoxy Shelf, Includes 4 Pilaster Clips | RM-45-SD | \$130 |
| HS-5319 | Epoxy Shelf, Includes 4 Pilaster Clips | RM-49 | \$130 |
| HS-5343 | Epoxy Shelf, Includes 4 Pilaster Clips | RM-7 | \$65 |
| HS-5344 | Epoxy Floor Shelf | RM-7 | \$45 |
| HS-5288 | 4" Casters-Set Of Four, Two With Brakes | RM-10, RM-26, RM-45-SD, RM-49 | \$107 |

BACK BAR ACCESSORIES

| Model Number | Description | For Use With | List F.O.B. Griffin |
|--------------|--|--|---------------------|
| HS-5408 | Low Profile 3" Casters & Rail (2 rails, 4 casters & hardware) | HBB-2-59, HBB-3-69, HBB-2G-LD-59, HBB-3G-LD-69, HBC-50, HBC-65, HDD-2-59, HDD-3-69 | \$400 |
| HS-5409 | Low Profile 3" Casters & Rail (3 rails, 6 casters & hardware) | HBB-3-80, HBB-4-95, HBB-3G-LD-80, HBB-4G-LD-95, HBC-80, HBC-95, HDD-3-80, HDD-4-95 | \$700 |
| HS-5410 | Complete Door Assembly-Solid, Right Hinge | All Back Bar and Direct Draw Models except HDD-1-24 | \$250 |
| HS-5411 | Complete Door Assembly-Solid, Left Hinge | All Back Bar and Direct Draw Models except HDD-1-24, HBB-3-80, HBB-3G-LD-80, HDD-3-80 | \$250 |
| HS-5412 | Complete Door Left Section Assembly-Solid, Left Hinge 80" | HBB-3-80, HDD-3-80, HBB-3G-LD-80 | \$250 |
| HS-5413 | Complete Door Assembly-Glass, Right Hinge | All Back Bar and Direct Draw Models except HDD-1-24 | \$500 |
| HS-5414 | Complete Door Assembly-Glass, Left Hinge | HBB-2-59, HBB-3-69, HBB-4-95, HBB-2G-LD-59, HBB-3G-LD-69, HDD-2-59, HDD-3-69, HDD-4-95 | \$500 |
| HS-5415 | Complete Door Left Section Assembly-Glass, Left Hinge 80" | HBB-3-80, HDD-3-80, HBB-3G-LD-80 | \$500 |
| HS-5417 | Flat Shelf, 59" & Right 80" Cabinets, 21.25" x 21.4", Includes 4 SS pilaster clips | HBB-2-59, HBB-2G-LD-59, HDD-2-59, (Right Section) HBB-3-80, HBB-3G-LD-80, HDD-3-80 | \$100 |
| HS-5418 | Flat Shelf, 69" & 95" Cabinets, 26" x 21.4", Includes 4 SS pilaster clips | HBB-3-69, HBB-3G-LD-69, HBB-4-95, HDD-3-69, HDD-4-95, HBB-4G-LD-95 | \$100 |
| HS-5419 | Flat Shelf Center, 80" Cabinets, 23.1" x 21.4", Includes 4 SS pilaster clips | (Center) HBB-3-80, HBB-3G-LD-80, HDD-3-80 | \$100 |
| HS-5420 | Flat Shelf Left, 80" Cabinets, 18" x 21.4", Includes 4 SS pilaster clips | (Left Section) HBB-3-80, HBB-3G-LD-80, HDD-3-80 | \$100 |
| HS-5421 | Set of 4 Pilasters 20.2" | All Back Bar and Direct Draw Models | \$100 |

MISCELLANEOUS ACCESSORIES

| Model Number | Description | For Use With | List F.O.B. Griffin |
|--------------|---|---|---------------------|
| HS-4007 | Drawer Assembly Divider Bar (Accommodates 1/2, 1/3 and 1/6 Size Pans) | Undercounters, Worktops, Prep Tables with Drawers & CRES Models | \$40 |
| HS-4009 | 12" Rail Divider Bar | Prep Tables | \$25 |
| HS-5069 | Sandwich Top Rail Adapter Bar - 12.6" x 1.0" (front to back) | Sandwich Top & Mega Top Prep Tables | \$25 |
| HS-5280 | Full Size Pan Adapter Bar for CRMR27-8 Rail | Sandwich Top Prep Tables | \$40 |
| HS-5281 | Full Size Pan Adapter Bar for SR36A-10 Rail | Sandwich Top Prep Tables | \$40 |
| HS-5075 | Stainless Back - 27" Horizontal Models (factory installed only) | Refrigerator | \$370 |
| HS-5171 | Stainless Back - 27" Horizontal Models (factory installed only) | Freezer & Prep | \$370 |
| HS-5277 | Stainless Back - 36" Horizontal Models (factory installed only) | Refrigerator, Freezer | \$430 |
| HS-5076 | Stainless Back - 48" Horizontal Models (factory installed only) | Refrigerator, Freezer & Prep | \$480 |
| HS-5085 | Stainless Back - 60" Horizontal Models (factory installed only) | Refrigerator | \$550 |
| HS-5170 | Stainless Back - 60" Horizontal Models (factory installed only) | Freezer & Prep | \$550 |
| HS-5086 | Stainless Back - 72" Horizontal Models (factory installed only) | Refrigerator & Prep | \$630 |
| HS-5112 | Stacking Kit - CRMR27 & CRMF27 | Undercounters | \$390 |
| HS-5184 | All Mega Top divider front to back | Mega Top Prep Tables | \$35 |
| HS-5185 | All Mega Top & Sandwich Prep 27-8 divider side to side (outer) | Sandwich Top & Mega Top Prep Tables | \$25 |
| HS-5186 | Mega Top 18M & 30M divider side to side (center) | Mega Top Prep Tables | \$25 |
| HS-5187 | Sandwich Prep 27-8 divider front to back | Sandwich Top Prep Tables | \$25 |
| HS-5188 | Sandwich Prep 48-8 and 12, 16, 18 pan openings divider front to back | Sandwich Top Prep Tables | \$25 |
| HS-5189 | Sandwich Prep 48-8 and 12, 16, 18 pan openings side to side (outer) | Sandwich Top Prep Tables | \$25 |
| HS-5190 | Sandwich Prep 12 & 16 pan openings side to side (center) | Sandwich Top Prep Tables | \$25 |
| HS-5191 | Sandwich Prep 18 pan openings side to side (outer) | Sandwich Top Prep Tables | \$40 |
| HS-5192 | Sandwich Prep 18 pan openings side to side (center) | Sandwich Top Prep Tables | \$40 |
| HS-5453 | Heated Condensate Pan Kit (Steelheart) | ≥46" Undercounter, Worktop and Prep Tables | \$380 |



HOSHIZAKI. BEYOND STRONG.

HOSHIZAKI AMERICA, INC.

618 Hwy. 74, South, Peachtree City, GA 30269

TEL 800-438-6087 | FAX 800-345-1325

hoshizakiamerica.com

Item #40067 | 02-19-19

